


DEMOLITION NOTES



- ① EXISTING AC PAVEMENT, PCC PAVEMENT, CONCRETE SLURRY, CURB, CURB AND GUTTER, DRIVEWAY, CURB OUTLET, 4' TALL CHAIN-LINK FENCE, IRRIGATION, LANDSCAPING, TREES, GRAVEL, LIGHTS, SIGNS, BOLLARDS, ETC. TO BE REMOVED.
- ② 2" IRRIGATION SERVICE WITH EXISTING WATER METER AND VAULT TO BE REMOVED. EXISTING WATER SERVICE SHALL BE KILLED AT WATER MAIN AND RESURFACE THE TRENCH PER SDG-107. SEE TRAFFIC CONTROL PLANS ON SHEETS T3.
- ③ EXISTING PARKING METER TO REMAIN AND BE PROTECTED IN PLACE.
- ④ UNKNOWN SEWER LATERAL. ALL EXISTING UNUSED SEWER LATERALS SHALL BE PLUGGED AT EDGE OF THE RIGHT OF WAY OR FACE OF SHORING BY CONTRACTOR.
- ⑤ EXISTING METAL COVER ACCESS VAULT TO PREVIOUS BUILDING TO BE REMOVED. VAULT HAS BEEN CONCRETE SLURRIED AND LID HAS BEEN WELDED SHUT, STRUCTURE WAS ABANDONED IN PLACE.
- ⑥ EXISTING COX COMMUNICATION PULL BOX TO BE REMOVED BY CONTRACTOR.
- ⑦ EXISTING OVERHEAD LIGHTS ON ADJACENT BUILDING TO BE REMOVED.
- ⑧ EXISTING PARKING METER TO BE REMOVED AND SALVAGED.
- ⑨ EXISTING IRRIGATION BACKFLOW PREVENTER TO BE REMOVED.
- ⑩ EXISTING ELECTRICAL METER PEDESTAL TO BE REMOVED BY CONTRACTOR. ELECTRICAL SERVICE AND METER TO BE REMOVED BY SDG&E.
- ⑪ EXISTING GASLAMP LIGHT POLE TO BE RELOCATED. SEE STREET LIGHTING PLAN AND DETAILS ON SHEET 13.
- ⑫ EXISTING METAL COVER ACCESS VAULT TO REMAIN AND BE PROTECTED IN PLACE.
- ⑬ EXISTING PAC BELL MANHOLE TO REMAIN AND BE PROTECTED IN PLACE. IF NECESSARY, CONTRACTOR TO ADJUST TO NEW GRADES.
- ⑭ EXISTING GASLAMP LIGHT POLE TO REMAIN AND BE PROTECTED IN PLACE.
- ⑮ EXISTING CONCRETE SIDEWALK, CURB/CURB AND GUTTER, ETC. TO REMAIN AND BE PROTECTED IN PLACE.
- ⑯ CONTRACTOR SHALL REPLACE LEAD AND DISK PER GENERAL NOTE NO. 3 ON SHEET 1.
- ⑰ EXISTING WATER VALVE TO REMAIN AND BE PROTECTED IN PLACE. IF NECESSARY, CONTRACTOR TO ADJUST TO NEW GRADES.

GENERAL DEMOLITION NOTES

1. ALL DEMOLITION WORK REQUIRES A SEPARATE PERMIT. ALL ONSITE PRIVATE IMPROVEMENTS AND/OR DEMOLITION SHOWN ON THIS PLAN ARE FOR INFORMATION ONLY.
2. CONTRACTOR SHALL OBTAIN A TRAFFIC CONTROL PERMIT PRIOR TO IMPLEMENTING DEMOLITION AND WATER KILL SET UP AREA. SEE TRAFFIC CONTROL PLANS ON SHEETS T1-T6.

WATER NOTES

SEE SHEET 2 FOR ALL WATER NOTES.




PRIVATE CONTRACT

DEMOLITION PLAN FOR:			
MOXY HOTEL			
LOT D AND THE SOUTH 1/2 OF LOT C			
BLOCK 60 OF HORTON ADDITION			
CITY OF SAN DIEGO, CALIFORNIA DEVELOPMENT SERVICES DEPARTMENT SHEET 9 OF 22 SHEETS		I.O. NO. 24006399 PROJECT NO. 462834	V.T.M.
DATE OF LAST CHANGE TO THIS PLAN 02/22/2017		DATE 2/22/17	
DESCRIPTION	BY	APPROVED	DATE FILMED
ORIGINAL	NE		
AS-BUILTS			
CONTRACTOR	DATE STARTED	1840-6281 NAD83 COORDINATES	
INSPECTOR	DATE COMPLETED	200-1721 LAMBERT COORDINATES	
		39184-09-D	

PLAN DATE IDENTIFIER
DATE OF LAST CHANGE TO THIS PLAN 02/22/2017
DATE OF THIS BLOCK 02/22/2017

DEMOLITION PLAN
SCALE 1" = 10'

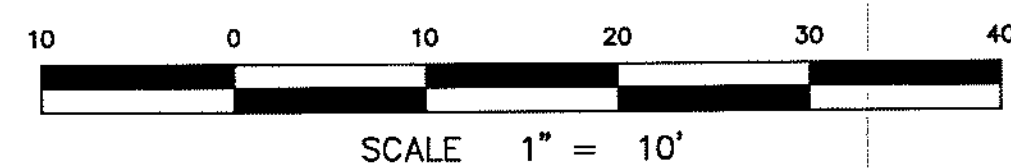

Nasland
Civil Engineering
Surveying
Land Planning
T (858) 292-7770
4740 Ruffner Street
San Diego, CA 92111
nasland.com

