

A

B

C

D

E

G

F.9

F

E.4

E

D

C

B.1


B

A.1

A


1 THIRD FLOOR PLAN - SOUTH - LIGHTING

E2.03 SCALE: AS INDICATED



GIFFIN • BOLTE • JURGENS
ARCHITECTS

815 S.W. SECOND AVENUE, PORTLAND, OREGON 97204
(503) 223-0992 www.gbjarch.com FAX (503) 294-3961

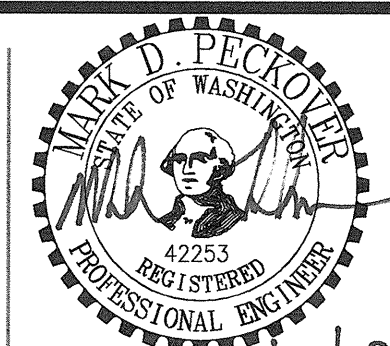

MultiCare
EMERGENCY DEPARTMENT & CANCER CENTER EXPANSION

TACOMA, WASHINGTON

100% CD SET 9/26/08
CCD #4 12/17/08
CCD #9 3/20/09
CCD #12 5/26/09

Date 09-26-2008
Scale AS INDICATED
Drawn By JL
Job No. 4034

THIRD FLOOR
PLAN - SOUTH
LIGHTING

E2
03

GENERAL NOTES

- SEE ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT FIXTURE LOCATIONS.
- SEE ARCHITECTURAL ELEVATIONS FOR MOUNTING HEIGHTS FOR WALL MOUNTED FIXTURES.
- COORDINATE FIXTURE LOCATIONS IN AREAS WITH DUCTWORK AND PIPING WITH EXPOSED CEILINGS. ADJUST LOCATIONS AS REQUIRED FOR ACTUAL FIELD CONDITIONS.
- SUPPORT LIGHTS IN ACCORDANCE WITH UBC 1632 AND 1634 SEISMIC ZONE REQUIREMENTS.
- WHERE SWITCHES ARE SHOWN GROUPED, PROVIDE A COMMON BACKBOX WITH BARRIERS AS REQUIRED BY NEC AND COMMON SEAMLESS FACEPLATES.
- IN ROOMS WITH 3-LAMP FIXTURES WHERE DUAL LEVEL SWITCHING IS INDICATED, CIRCUIT FIXTURE SUCH THAT ONE SWITCH CONTROLS THE INNER LAMP AND THE SECOND SWITCH CONTROLS THE OUTER LAMP.
- PROVIDE DIMMING BALLAST(S) FOR FLUORESCENT FIXTURES SHOWN CONNECTED TO A DIMMING SWITCH DAYLIGHT SENSING PHOTOCELL.

FLAG NOTES

- CONNECT COMPLETE TO EXTERIOR LIGHTING TIMECLOCK.
- DAYLIGHTING PHOTOSENSOR.
- PROVIDE DIMMING BALLAST FOR DAYLIGHTING CONTROL. CONNECT COMPLETE TO DAYLIGHTING PHOTOSENSOR.
- CONNECTION TO OWNER FURNISHED EXAM LIGHT.
- LIGHTING AND SWITCHING TO BE DETERMINED. PROVIDE COST ALLOWANCE COORDINATE WITH ARCHITECT.
- PROVIDE EMERGENCY BATTERY BALLAST IN FIXTURE SHOWN.
- REFER TO SHEET Axxx FOR MOUNTING DETAILS.
- REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING AND ELEVATION.
- PROVIDE ONE 1'2" FIXTURE MOUNTED IN THE CEILING AND ONE 1'2" FIXTURE MOUNTED IN THE CASEWORK. PROVIDE 277V DRIVER FOR 1'2" FIXTURES. SEE DETAIL B4/A10.30 FOR EXACT LOCATIONS.
- SEE ARCHITECTURAL DRAWINGS FOR FIXTURE RADIUS AND EXACT LOCATION.
- PROVIDE RAIL SYSTEM LAYOUT WITH FIXTURE LAYOUT FOR REVIEW BY ARCHITECT, OWNER AND ENGINEER PRIOR TO PLACING FIXTURE ORDER OR ROUGH-IN. SIZE LOW VOLTAGE TRANSFORMER FOR 20 FIXTURES AS SHOWN. LIGHTS ARE TO EXTEND TO 1" BELOW THE BOTTOM EDGE OF THE WOOD LIGHT DIFFUSER. HEIGHT VARIES COORDINATE LIGHT FIXTURE LOCATIONS WITH ARCHITECT PRIOR TO FINAL INSTALLATION. FIELD VERIFY CABLE SYSTEM LENGTHS.
- PROVIDE 5-GANG BOX ABOVE SWITCHES FOR ROOM 3016. PROVIDE ENGRAVED NAMEPLATES FOR EACH SWITCH AS SPECIFIED.