

A


B

C

D


E

F

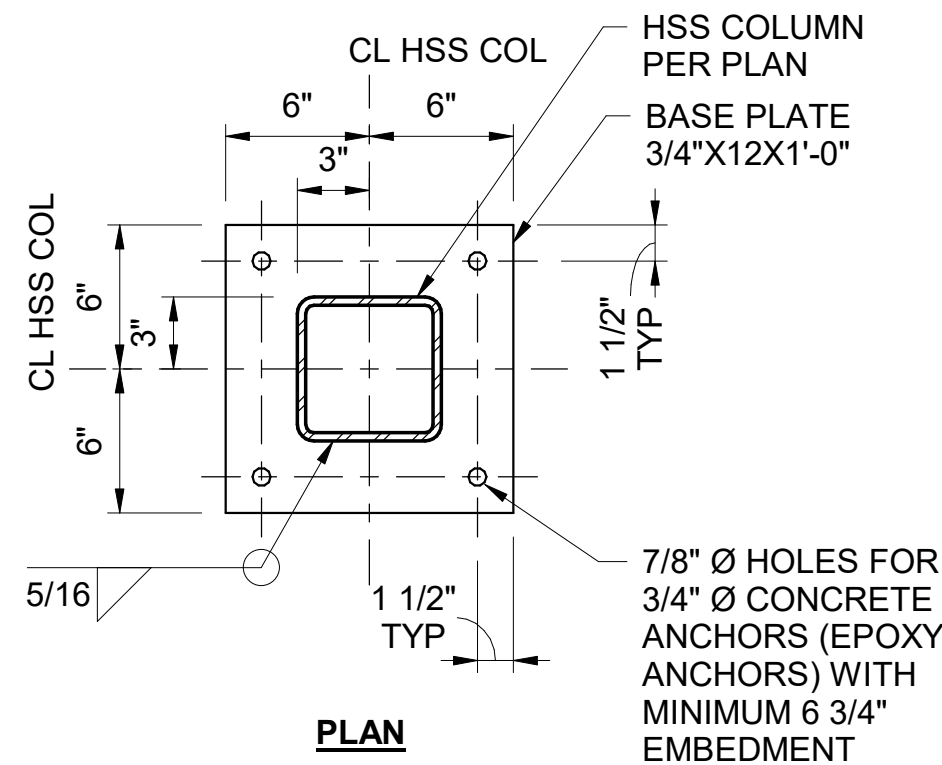


B1 SECTION

S-515 SCALE: 1 1/2" = 1'-0"

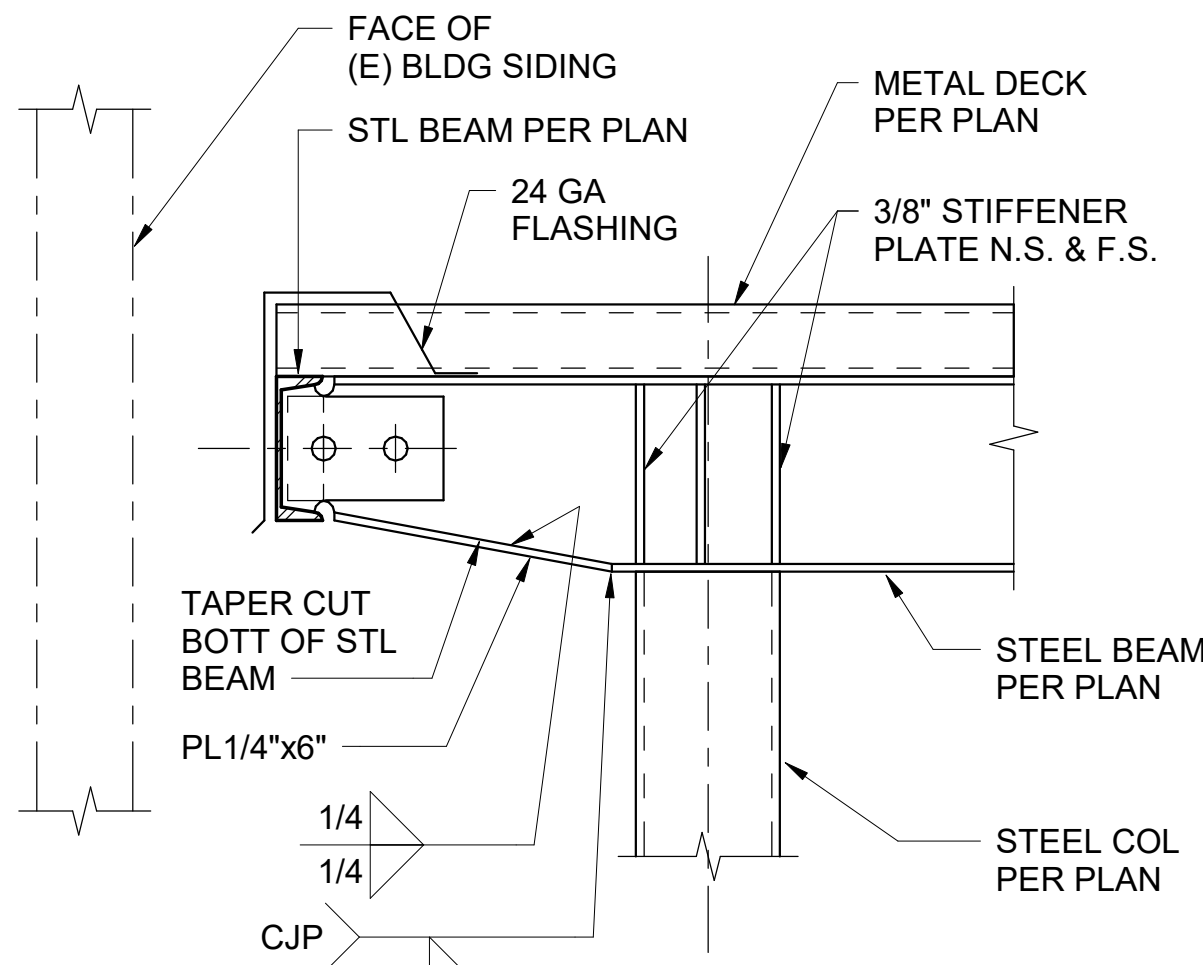


B3 SECTION

S-515 SCALE: 1 1/2" = 1'-0"

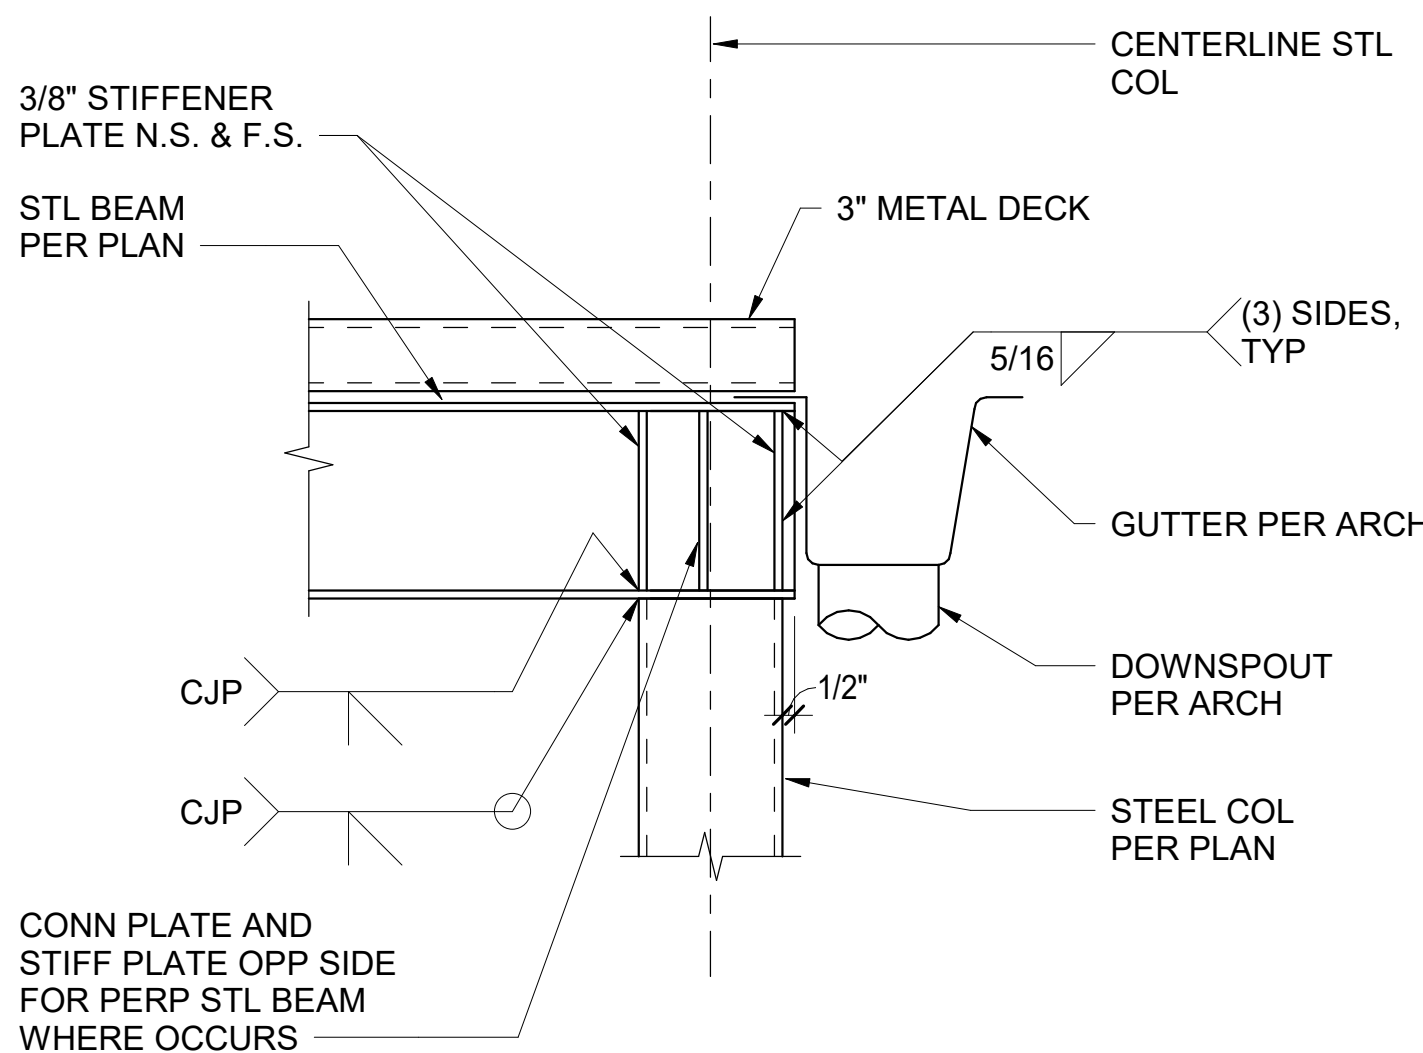


B5 SECTION

S-515 SCALE: 1 1/2" = 1'-0"

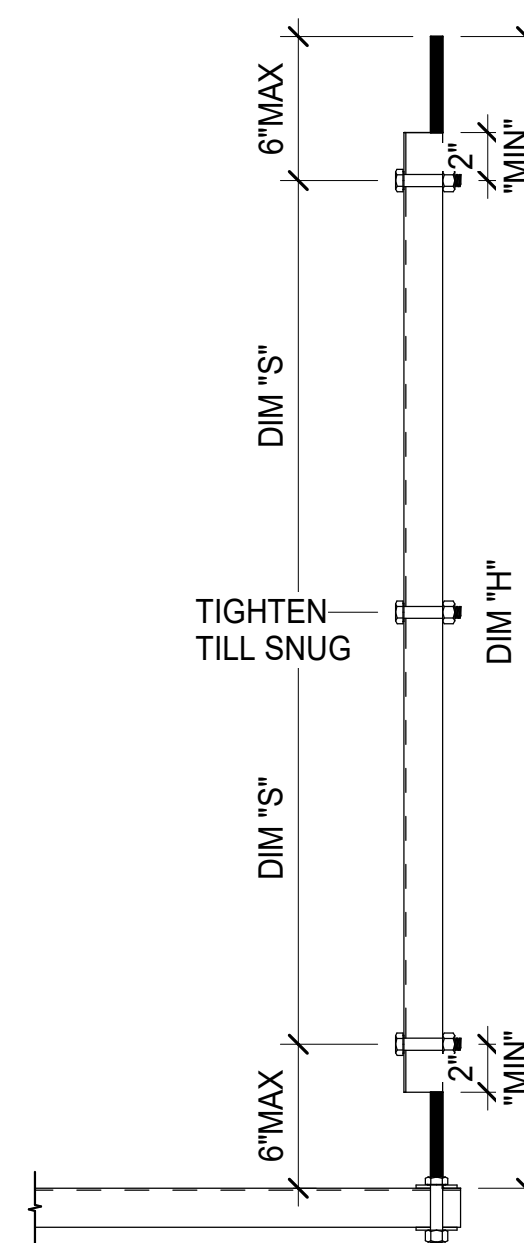


ROD STIFFENER CHART						
THREADED ROD DIAMETER		DIM "H" MAXIMUM ROD LENGTH WITHOUT STIFFENER		DIM "S" MAXIMUM SPACING BETWEEN ROD STIFFENERS		MAX REACTION
IN	(mm)	IN	(mm)	IN	(mm)	LBS
3/8"	(10)	16"	(406)	13"	(330)	790
1/2"	(13)	22"	(559)	18"	(457)	1460

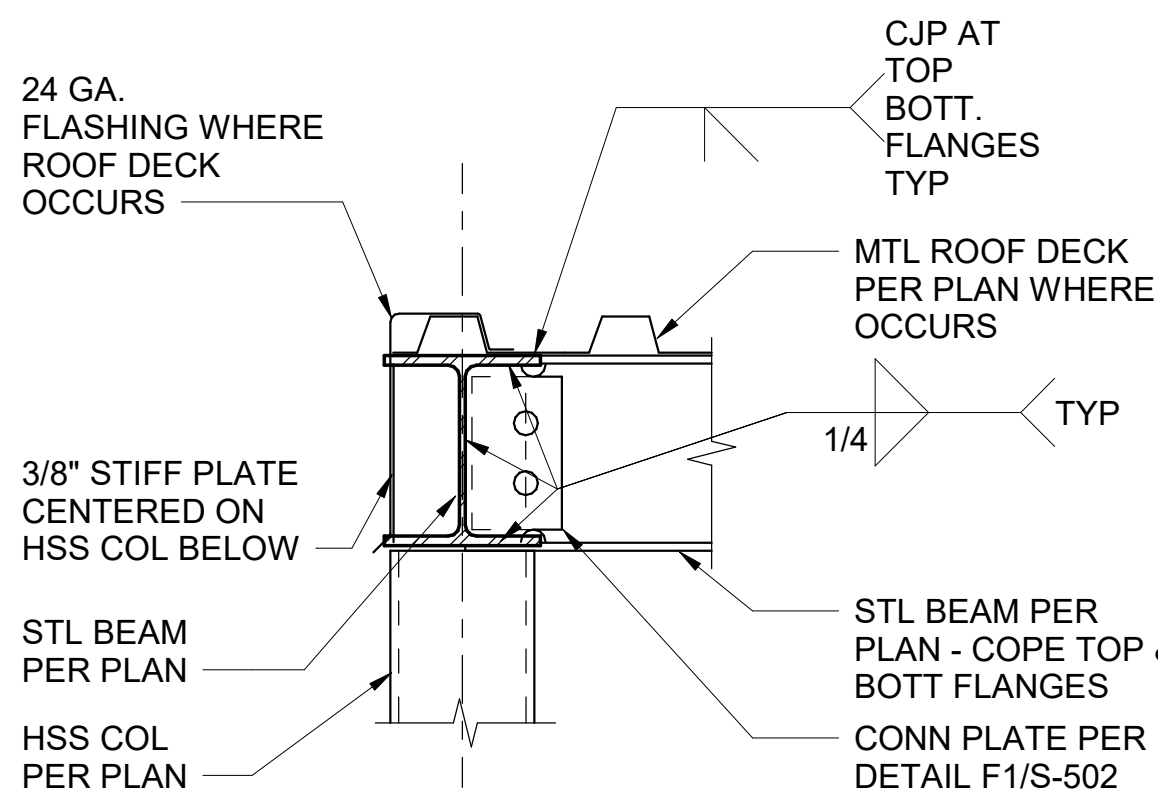


D1 SECTION

S-515 SCALE: 1 1/2" = 1'-0"

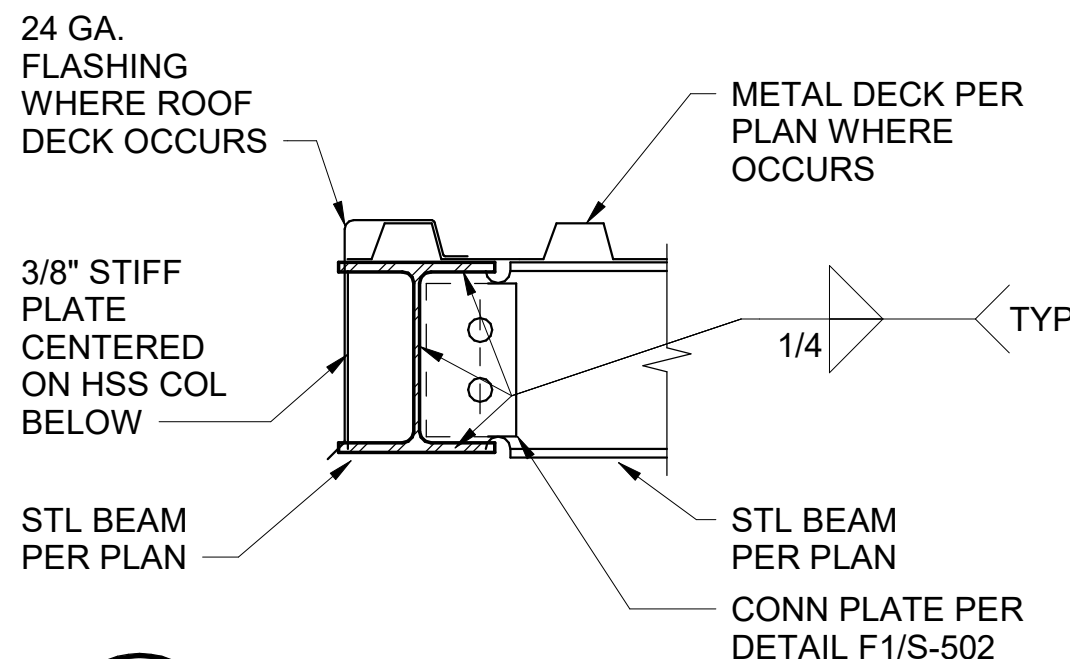


D3 SECTION

S-515 SCALE: 1 1/2" = 1'-0"

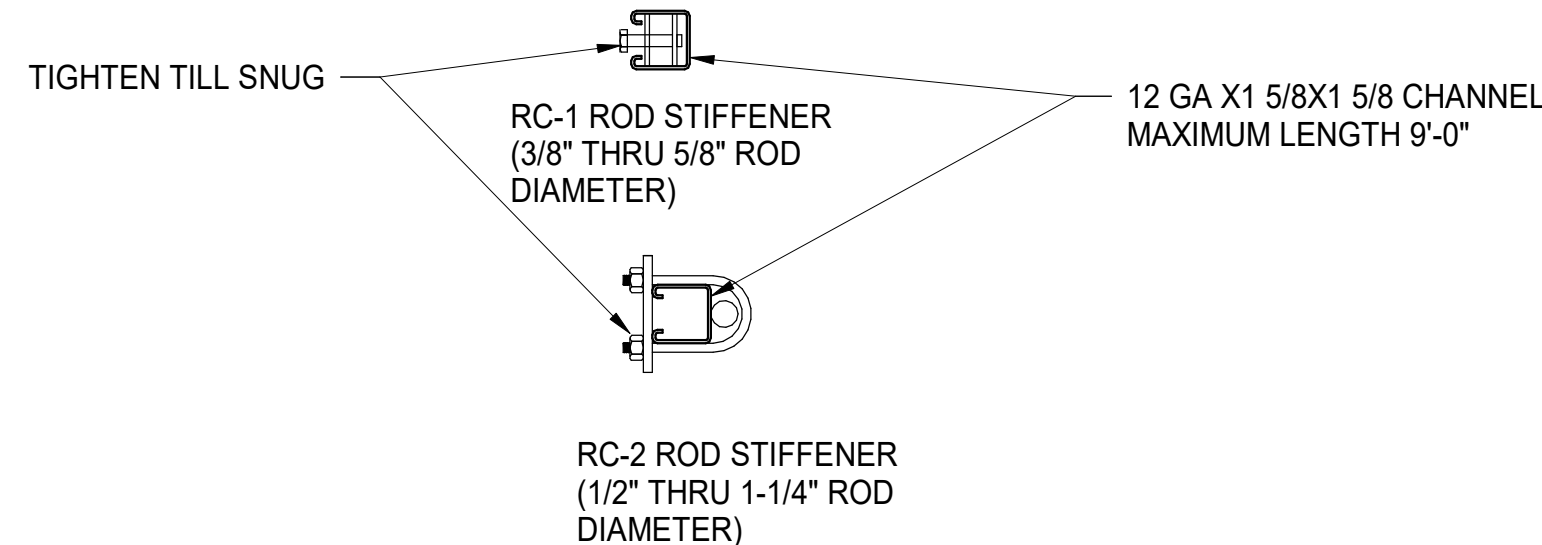


D6 TYPICAL HANGER ROD STIFFENER DETAIL

S-515 SCALE: 1 1/2" = 1'-0"

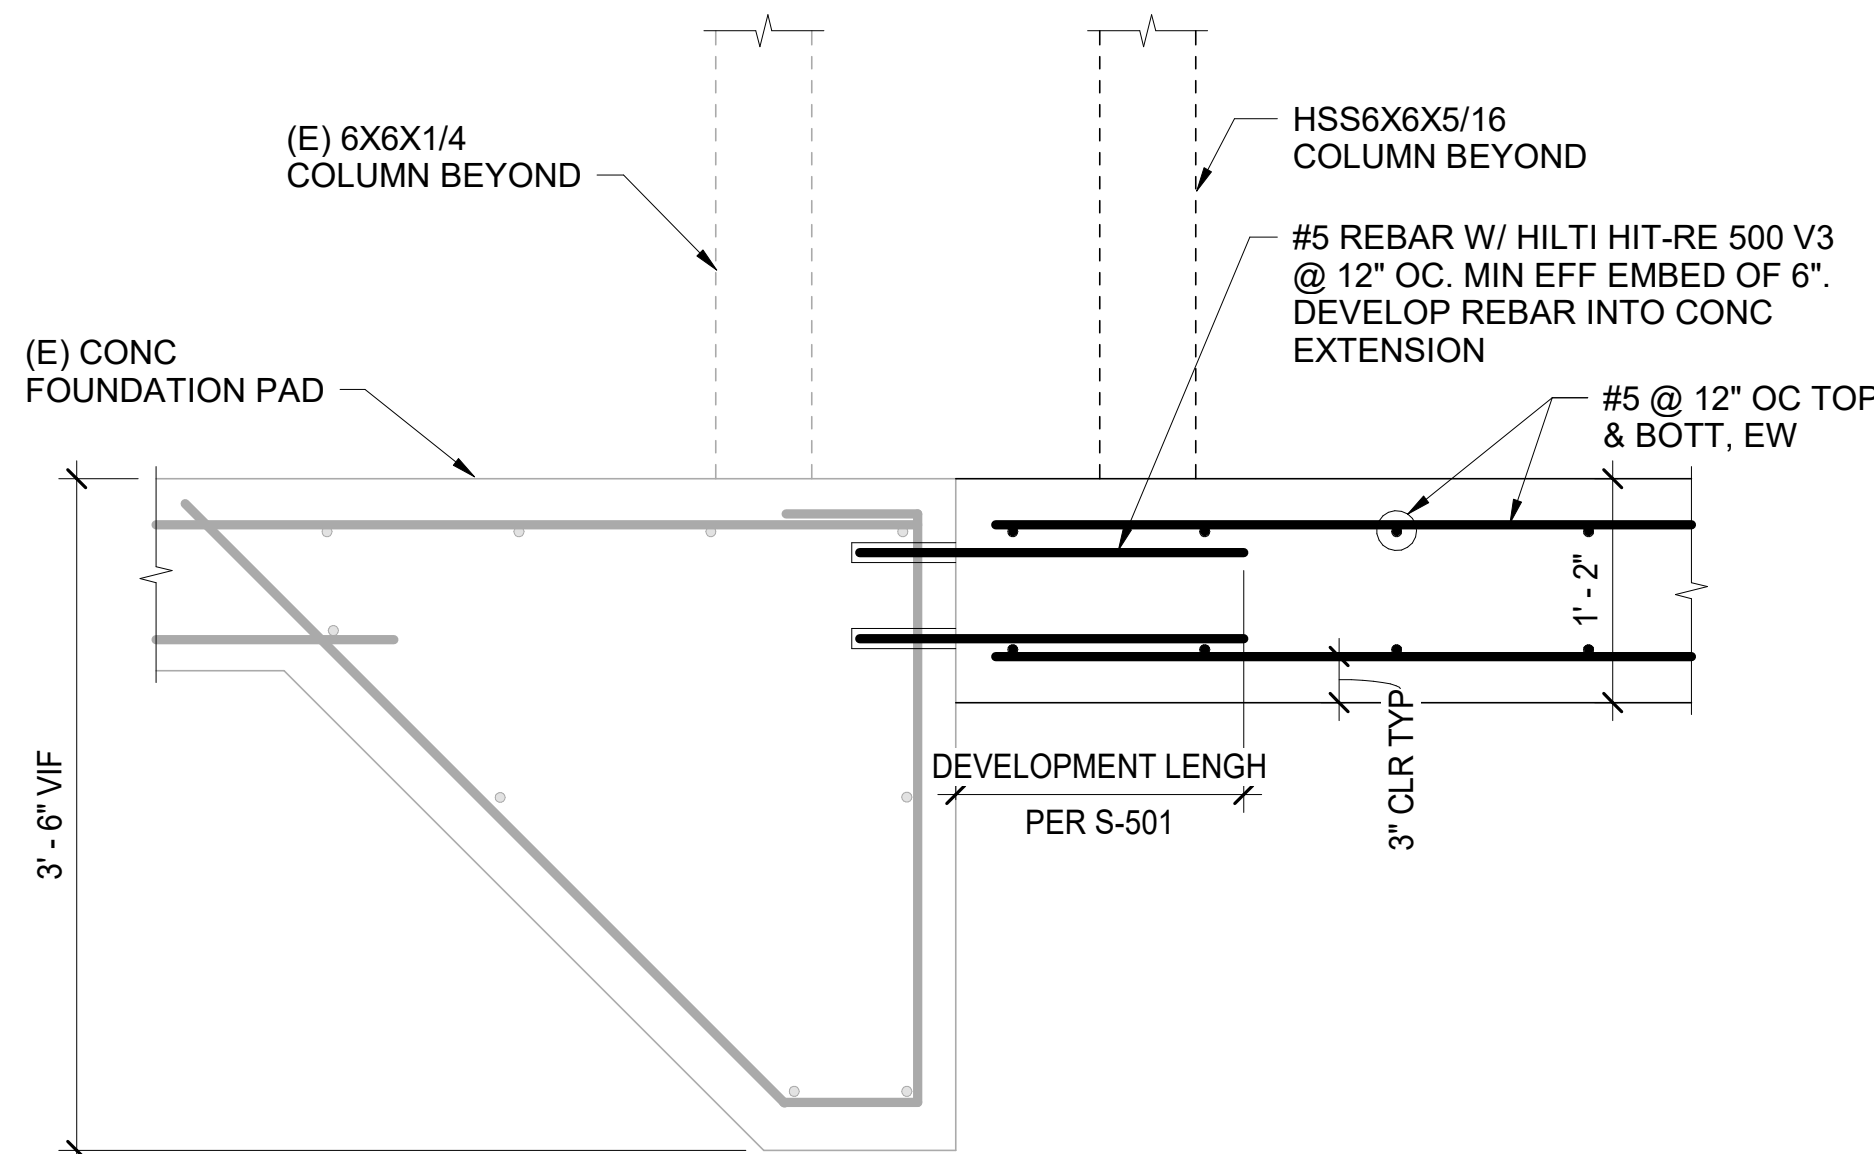

F1 CONC PAD EXTENSION

S-515 SCALE: 1" = 1'-0"

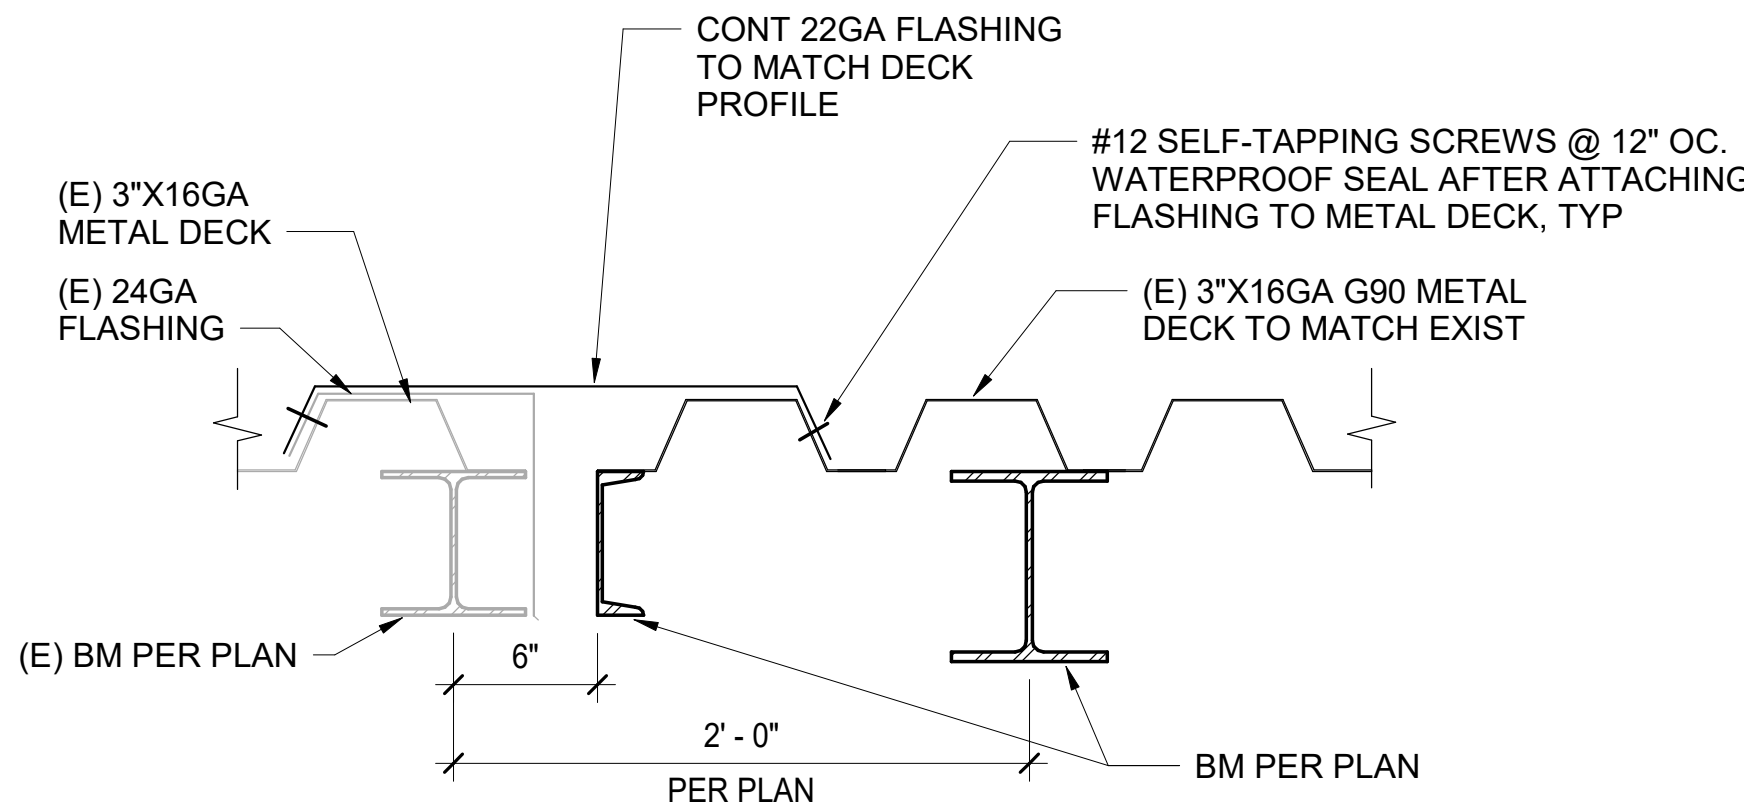

F4 SECTION

S-515 SCALE: 1 1/2" = 1'-0"

Sheet Title
CANOPY SUPPORT DETAILS

Dwg. No.
PLS2021-0432-0016D

Sht. No.
S-515