


- MATERIAL LEGEND**
Division 05 Metals
- 05 50 00 A SKATE DETERRENT STOPS. INSTALL 1'-6" FROM OUTSIDE/INSIDE CORNER OF PARTIAL HEIGHT CONCRETE PLANTER WALLS ADJACENT TO PAVING OR WALK. LAYOUT STOPS EQUALLY SPACED BETWEEN END STOPS AS SHOWN ON THE PLAN WITH 1'-0" MAXIMUM GRACING BETWEEN STOPS. SEE THE PLANTER PRECAST CAP/COPING LAYOUT FOR ADDITIONAL STOP LOCATIONS.
- GENERAL NOTES**
- REFER TO CIVIL FOR TOP OF PAVING/FINISHED WALL ELEVATIONS AND SURFACE DRAINAGE INFORMATION OUTSIDE OF BUILDING ENVELOPE.
 - REFER TO LANDSCAPE FOR PAVING PATTERNS AND RELATED DIMENSIONS.
 - REFER TO CIVIL FOR FINISHED TOP OF CURB ELEVATIONS.
 - TOP OF SLAB ELEVATIONS REFER TO TOP OF STRUCTURAL SLAB - SEE STRUCTURAL DRAWINGS.
 - TOP OF CONC ELEVATIONS REFER TO TOP OF CAST-IN PLACE CONCRETE ABOVE STRUCTURAL SLAB.
 - TOP OF CURB ELEVATIONS REFER TO TOP OF CAST-IN PLACE CONCRETE CURBS ABOVE STRUCTURAL SLAB AT LANDSCAPE PLANTERS. AN ADDITIONAL CAST-IN-PLACE WALL WILL BE CAST ON TOP OF THE CURBS UP TO THE TOP OF CONCRETE ELEVATION AFTER WATERPROOFING OF PLANTER AREAS.
 - SEE WATERPROOFING PLANS A2/03 AND A2/04 FOR LOCATION OF DETAIL SECTIONS THROUGH PLANTER WALLS/CURBS.

- KEY NOTES**
- LOCATION OF TRENCH DRAIN. SEE MECHANICAL FOR LOCATION OF DRAIN DISCHARGE THROUGH SLAB AND RELATED PLUMBING.
 - LOCATION OF TRENCH DRAIN IN SURFACE PAVEMENT - SEE CIVIL.
 - LANDSCAPING DRAIN WITH SECONDARY DRAIN. PROVIDE CONCRETE TOPPING ON TOP OF STRUCTURAL SLAB AT A SLOPE OF 1/4" FT. MINIMUM TO DRAIN. COORDINATE WITH MECHANICAL FOR SIZE AND ROUTING OF PIPING.
 - PROVIDE CONCRETE TOPPING ON TOP OF STRUCTURAL SLAB AT A SLOPE OF 1/4" FT. MINIMUM TO DRAIN.
 - OUTLINE OF SITE FEATURES ABOVE STRUCTURAL SLAB - SEE CIVIL AND LANDSCAPE DRAWINGS.
 - PROVIDE 1' WIDE X 3 1/2' DEEP PROTRUSION FROM FACE OF CAST-IN-PLACE CONCRETE WALL AT PLANTER AREAS WITH MASONRY ABOVE TO ALLOW FOR TERMINATION OF WATERPROOFING. THIS PROTRUSION IS NOT REQUIRED AT PLANTER WALLS THAT ARE TO RECEIVE A PRECAST COPING/CAP. SEE DETAIL A1/A2/03.
 - TYPICAL LAYOUT AT COLUMNS ALONG GRIDLINE G.
 - 1'-11" WIDE C.I.P. CONCRETE WALL APPLIES ONLY TO WALL ABOVE THE STRUCTURAL SLAB IN THE PLANTER AREAS AT GRIDLINE H.
 - ROUGH OPENING IN SHEAR WALL 8'-0" HIGH ABOVE LANDING.
 - SAWOUT OPENING THROUGH EXISTING CONCRETE. TOP OF OPENING AT ELEVATION 355'-11". SEE STRUCTURAL FOR REINFORCING REQUIREMENTS. FIELD VERIFY RELATIONSHIP OF EXISTING CONCRETE TO NEW BUILDING GRID PRIOR TO ORDERING STEEL FOR FLOOR FRAMING OF BRIDGE.
 - OPENING FOR MECHANICAL - SEE STRUCTURAL. LOCATE BOTTOM OF 10" HIGH OPENING AT 10'-0" AFF.
 - NEW CONCRETE REINFORCING OF EXISTING WALL. SEE STRUCTURAL.



GIFFIN • BOLTE • JURGENS
ARCHITECTS
815 S.W. SECOND AVENUE • PORTLAND, OREGON 97204
(503) 223-0992 • www.gbjarch.com • FAX (503) 294-3961

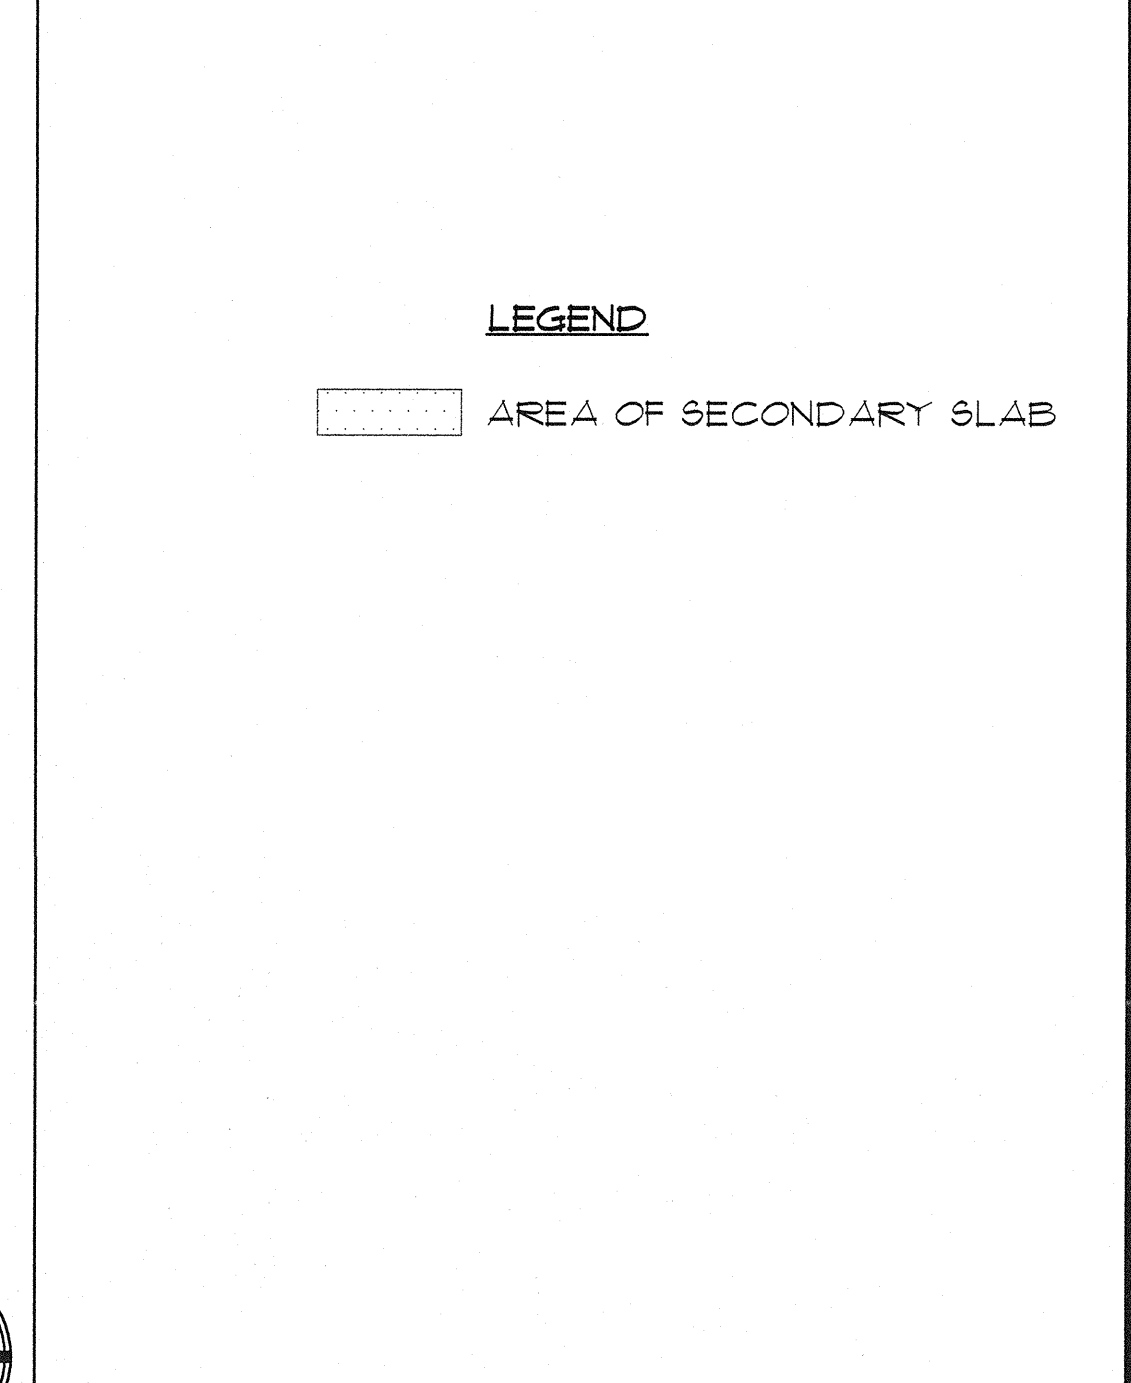

MultiCare
EMERGENCY DEPARTMENT & CANCER CENTER EXPANSION
TACOMA, WASHINGTON

Date	09-26-2008
Scale	1/8"=1'-0"
Drawn By	RJS
Job No.	4034

3rd Floor
Edge of Slab -
South

A2
03