




**J. OUTBOUND ANNEX & POV SECONDARY N-S SECTION 1**  
1/8" = 1'-0"

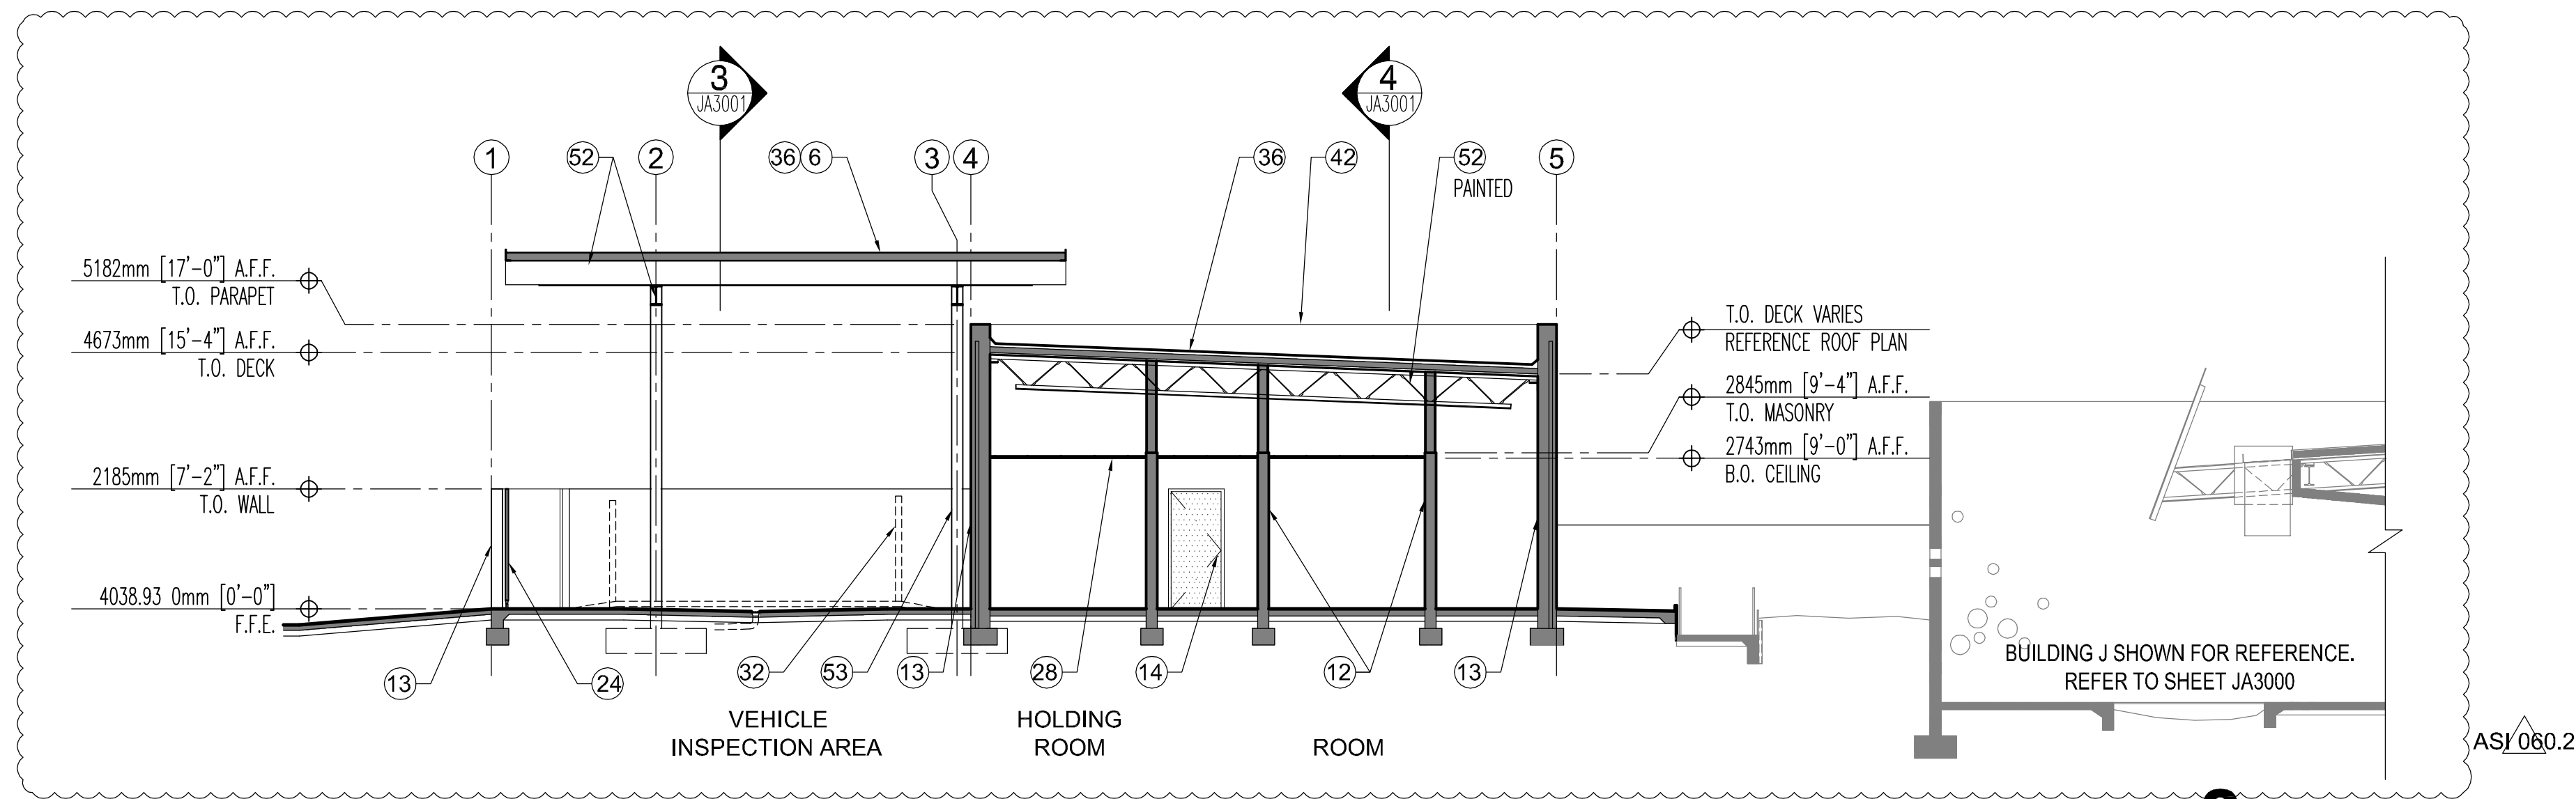

**J. OUTBOUND ANNEX & POV SECONDARY N-S SECTION 2**  
1/8" = 1'-0"

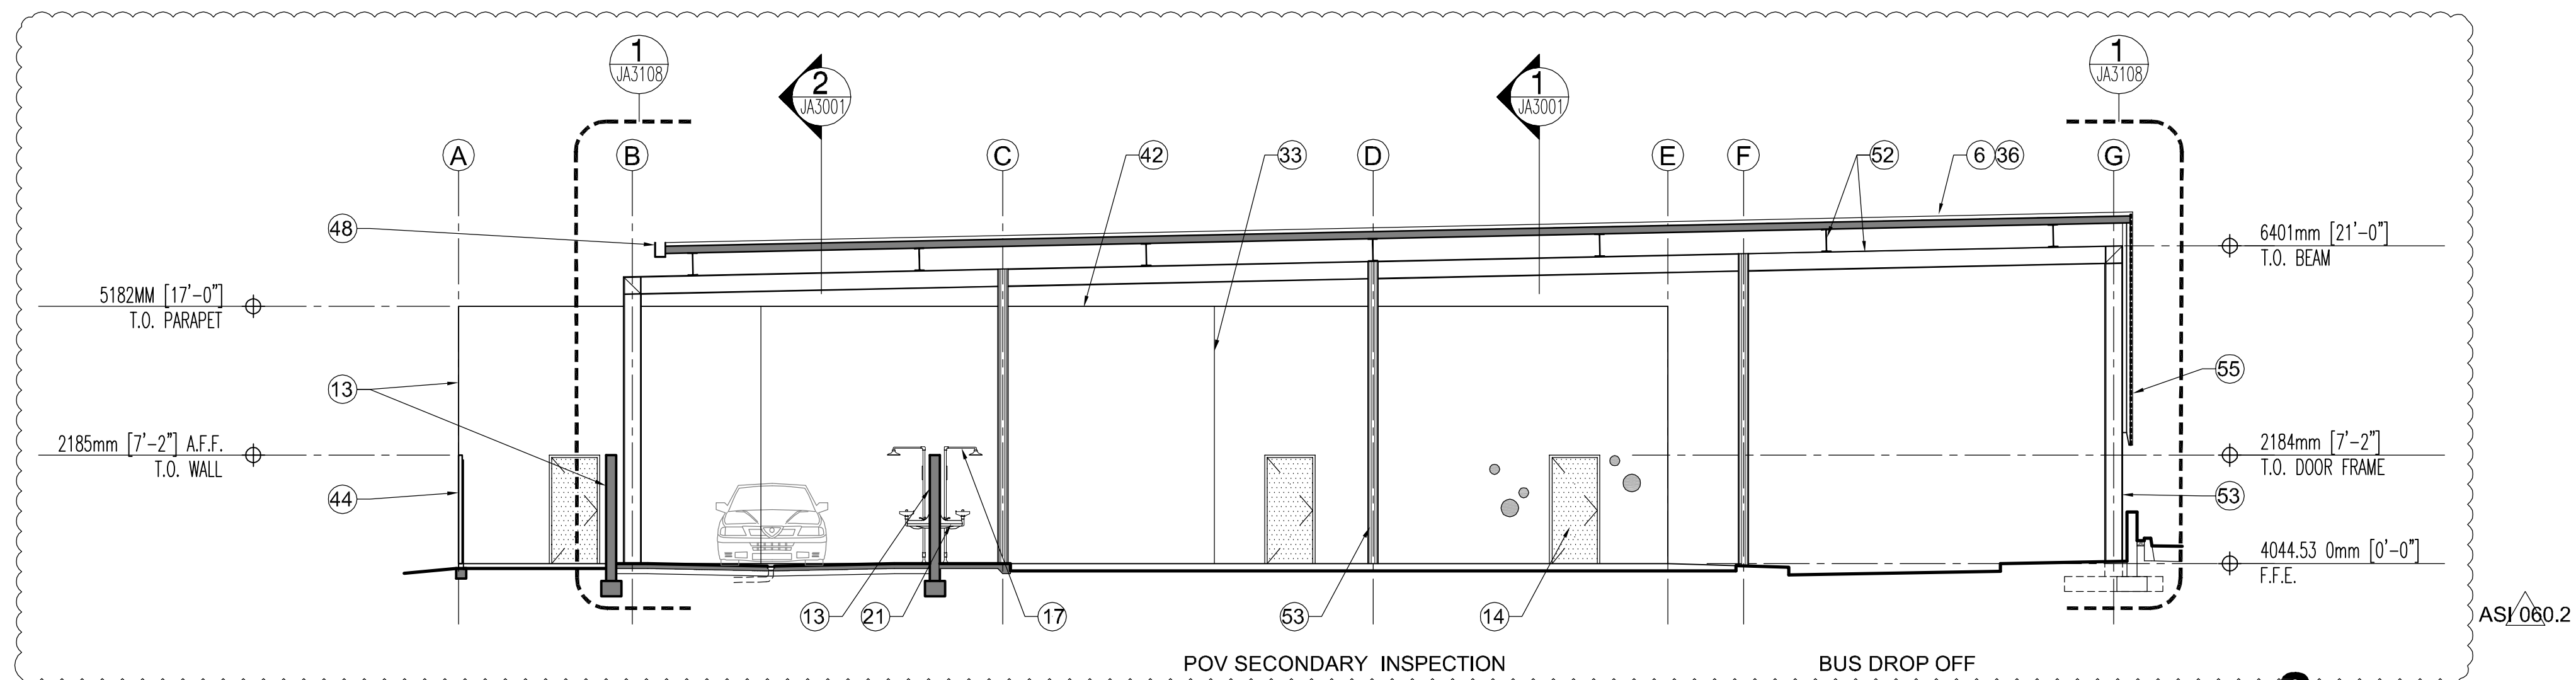

**J. OUTBOUND ANNEX & POV SECONDARY E-W SECTION 3**  
1/8" = 1'-0"

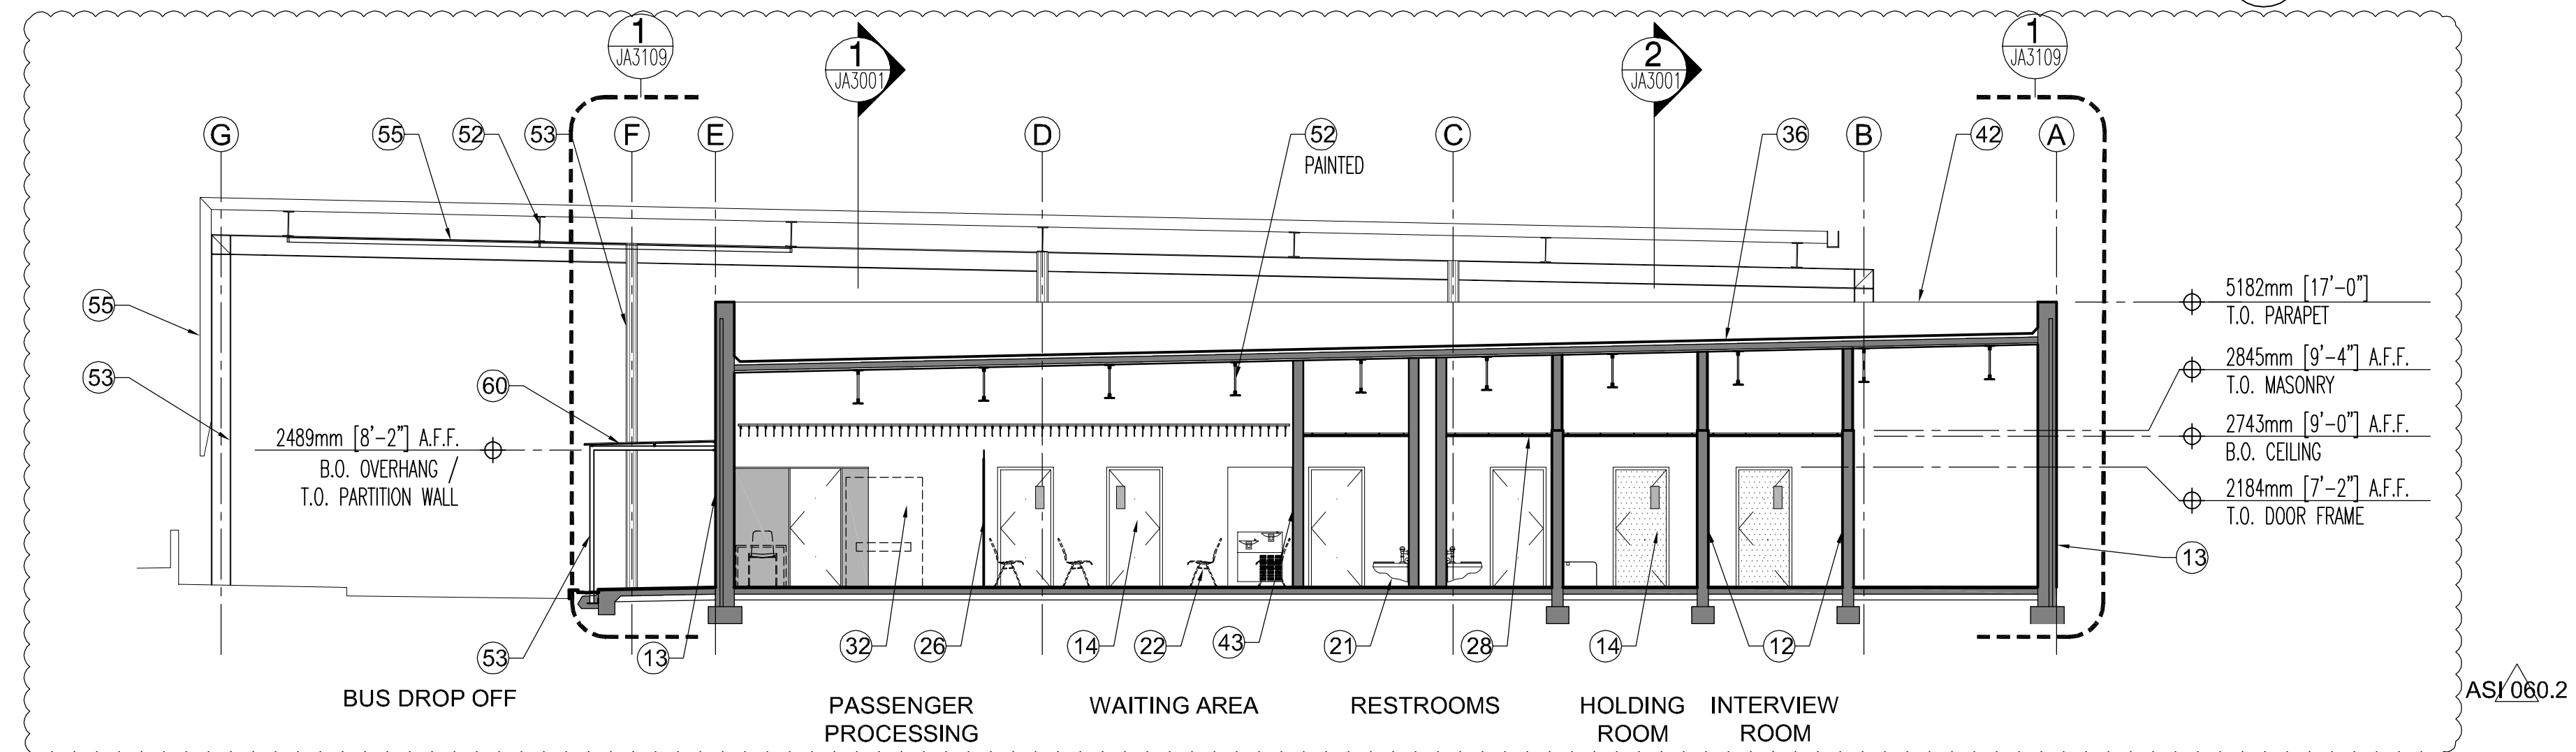

**J. OUTBOUND ANNEX & POV SECONDARY E-W SECTION 4**  
1/8" = 1'-0"

## GENERAL NOTES

- AREAS OF BULLET RESISTANT (B.R.) GLAZING & WALL CONSTRUCTION ARE INDICATED ON ELEVATIONS. ALL CONSTRUCTION IN THESE AREAS IS TO BE B.R. FROM 0'-0" F.F.E. TO 6'-6" A.F.F. GLAZING FRAMING SYSTEMS ARE B.R. FROM 0'-0" F.F.E. TO 7'-2" A.F.F.
- REFERENCE SPECIFICATIONS FOR FULL DESCRIPTIONS OF GLAZING TYPES, TYP.
- REF. ARCHITECTURAL ENLARGED SITE PLAN ZAS200 SERIES SHEETS FOR ALL DIMENSIONS & LOCATIONS OF INTERIOR & EXTERIOR CONCRETE SLAB JOINT PATTERNS, DEPRESSED SLAB INFO, EXTERIOR CONCRETE WALKWAYS, AND INTERIOR CARPET INFO. REF. CIVIL FOR ALL GUTTERS, ROADWAYS, & CURBS.

## GLAZING TYPES

- |    |  |
|----|--|
| 1A | 1/4", SINGLE PANE, CLEAR, TEMPERED                                       |
| 1B | 3/8", SINGLE PANE, CLEAR, TEMPERED                                       |
| 1C | 1/2", SINGLE PANE, CLEAR, TEMPERED                                       |
| 1D | 3/4", SINGLE PANE, CLEAR, TEMPERED                                       |
| 2  | 1/4", SINGLE PANE, TINTED, TEMPERED                                      |
| 3A | 1/4", LAMINATED, CLEAR   |
| 3B | 1/4", LAMINATED, OBSCURE   |
| 3C | 1/2", LAMINATED, (1/4" TINTED EXT. + 1/4" CLR INT.)                      |
| 3D | 1/4", LAMINATED, OBSCURE, TINTED   |
| 4  | 1" INSUL., TINTED, LOW-E (1/4" TINTED EXT. + 1/4" CLR INT.)              |
| 5  | 13/16" LAMINATED, CLEAR, BULLET RESISTANT                                |
| 6A | 13/16" LAMINATED, TINTED, BULLET RESISTANT                               |
| 6B | 13/16" LAMINATED, OBSCURE, TINTED, BULLET RESISTANT                      |
| 7  | 1-9/16", LAMINATED, TINTED, INSUL., BULLET RESISTANT                     |
| 8  | 13/16", LAMINATED, TINTED, TEMPERED                                      |
| 9  | 1-11/16", LAMINATED, TINTED, TEMPERED                                    |
| 10 | 1-11/16", LAMINATED, TINTED, TEMPERED, INSULATED                         |
| 11 | 1-11/16", LAMINATED, TINTED, OBSCURE, TEMPERED, INSUL., BULLET RESISTANT |

## KEY NOTES

- ALIGN
- BAFFLE CEILING SYSTEM, REF. 6/ZAS540
- S.S. CABLE TRELLIS 10'-0" MAX. ABOVE FIN. GRADE
- PV SYSTEM
- BOLLARD
- CANOPY
- CAST IN PLACE CONCRETE WALL
- FOR INFORMATION THIS AREA REF. ARCHITECTURAL ENLARGED SITE PLAN SHEET ZAS200
- CATWALK, METAL GRATE
- SECURITY CAGE
- BOOTH, REF. ENLARGED BOOTH DRAWINGS
- CONCRETE MASONRY UNIT WALL (CMU)
- CONCRETE TILT UP WALL, TEXTURED, REF. PLANS FOR TYPE
- DOOR AS SCHEDULED
- DRINKING FOUNTAIN, REF. PLUMBING, COORD. OPENINGS IN WALL W/ EDF MFR WHERE OCCUR
- ELECTRICAL EQUIPMENT, REF. ELECTRICAL
- EMERGENCY SHOWER/ EYEWASH, REF. PLUMBING
- HOSE BIBB CABINET, REF. 16/ZAS520 & PLUMBING
- NOT USED
- FIRE PROTECTION EQUIPMENT, REF. FIRE PROTECTION
- PLUMBING, REF. PLUMBING
- FURNITURE/ EQUIPMENT SHOWN DASHED, N.I.C.
- FENCING, REF. ARCHITECTURAL ENLARGED SITE PLAN SHEET ZAS200
- GATE, REF. ZAS200 SERIES SHEETS & GATE SCHEDULE
- GLAZING FRAMING SYSTEM, PAINT STEEL FRAMES P37
- GLAZING BARRIER WALL
- FOR INFORMATION THIS AREA REF. ENLARGED LANDSCAPE DWG.
- GYPSUM BOARD, REF. FINISH SCHEDULE
- HVAC DIFFUSER, REF. MECHANICAL
- HVAC DUCT, REF. MECHANICAL
- GAS REGULATOR, REF. PLUMBING