


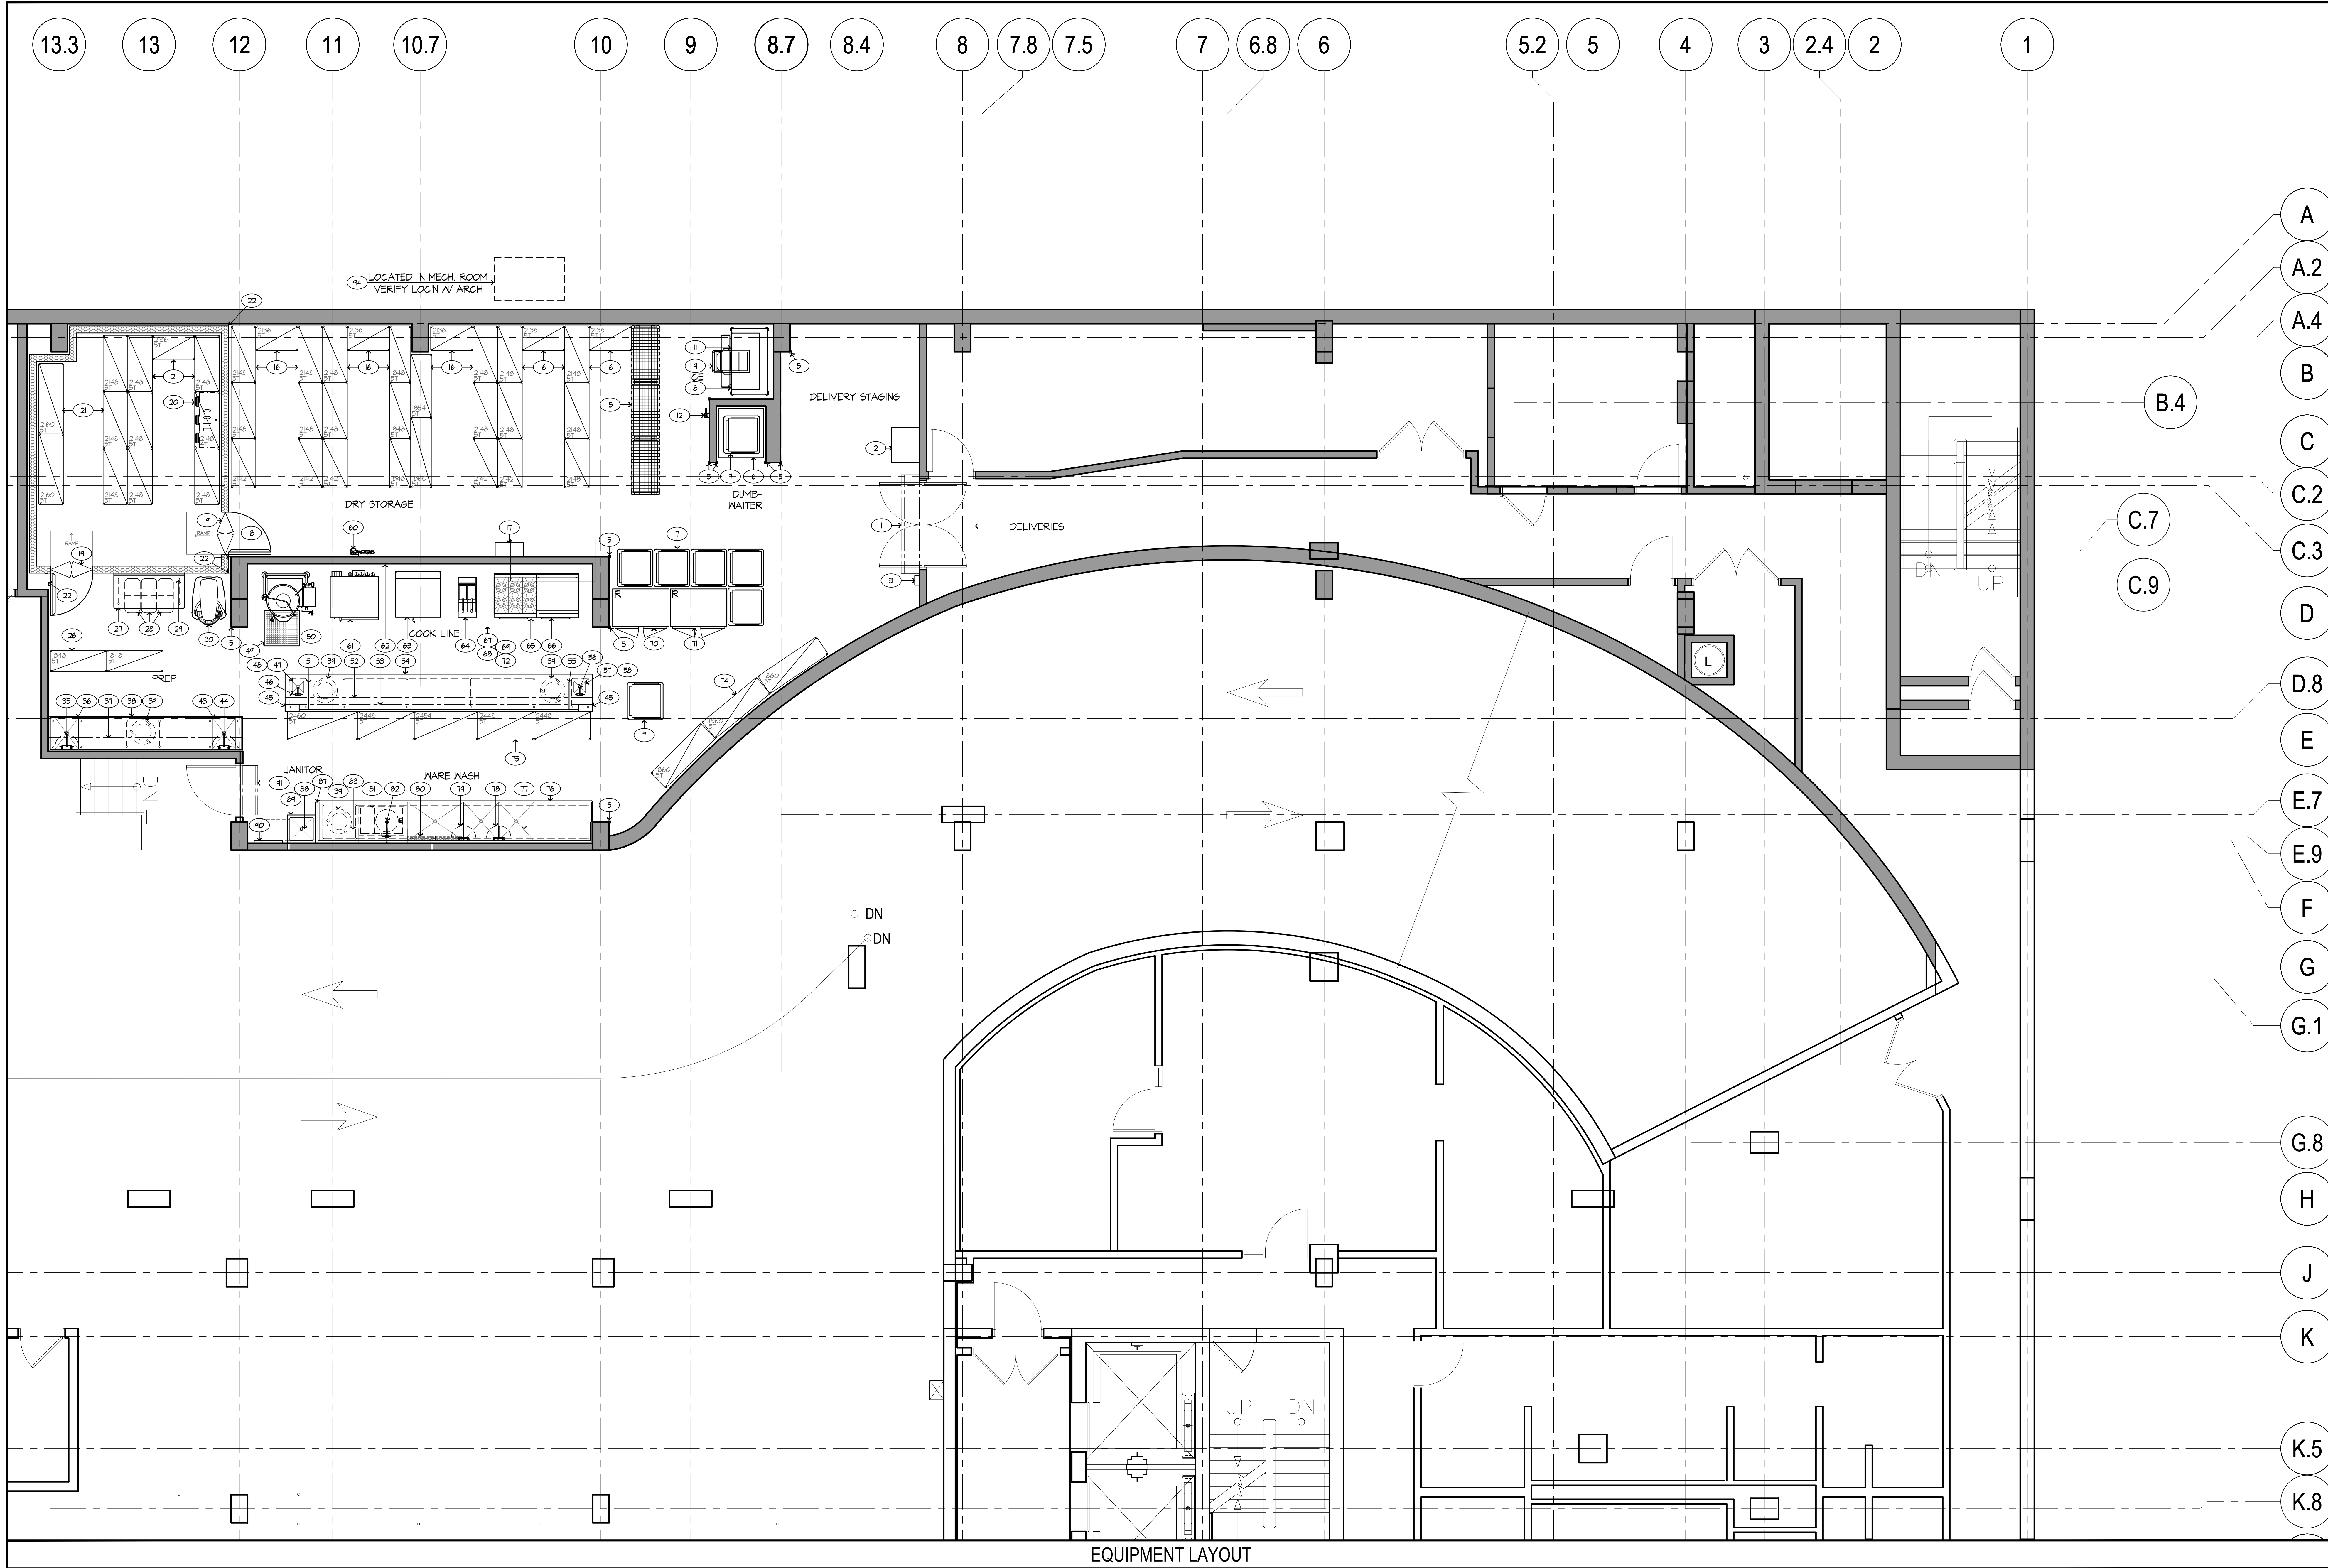

EQUIPMENT LAYOUT

GENERAL NOTES	ENVIRONMENTAL NOTES
1. ANY DISCREPANCIES BETWEEN PLANS, BUILDING, AND LOCAL CODE REQUIREMENTS THAT MAY AFFECT THE INSTALLATION, FABRICATION, OR OVERALL WORK IN ANY WAY SHALL BE BROUGHT TO THE ATTENTION OF THE GENERAL CONTRACTOR IMMEDIATELY BY THE GENERAL CONTRACTOR. 2. GENERAL CONTRACTOR TO PROVIDE AND INSTALL LEVEL PLAT-FORM PER CODES ON ROOF FOR COMPRESSORS AND EXHAUST AND MAKE-UP AIR FANS (VERIFY LOCATION). 3. GENERAL CONTRACTOR TO PROVIDE AND INSTALL ROOF JACKS FOR REFRIGERATION LINE PENETRATION THRU ROOF. (VERIFY LOCATION WITH REFRIGERATION CONTRACTOR). 4. GENERAL CONTRACTOR TO PROVIDE DUCT SHAFT(S) OPENING(S) THRU WALLS, CEILING AND ROOF FOR EXHAUST AND MAKE-UP AIR DUCTS WITH 2"X6 ON EDGE OR GIRD ON ROOF FLASHED AND SEALED TO MEET ALL CODES. S.C. TO VERIFY DUCT AND SHAFT CONSTRUCTION REQUIREMENTS WITH LOCAL CODES OFFICIALS. 5. GENERAL CONTRACTOR TO PROVIDE AND INSTALL BACKING IN WALLS FOR MOUNTING WALLS/ELVES, POT RACKS, DISH-SURFACES SHALL BE SEALED WITH A GLOSS OR SEMI-GLOSS ENAMEL. 6. ALL HORIZONTAL DIMENSIONS ARE FROM FINISHED FACE OF WALL TO FINISHED FACE OF WALL OR CENTERLINE OF COLUMN. 7. ALL VERTICAL DIMENSIONS ARE FROM FINISHED FLOOR OF WALL OR HALL OPENING. 8. ALL WALLS WITHIN AREA CLEARANCE REQUIREMENTS FOR COOKING EQUIPMENT SHALL BE CONSTRUCTED OF HEAT PROOF NON-COMBUSTIBLE MATERIALS. S.C. TO VERIFY CONSTRUCTION PER LOCAL CODES. 9. WHERE REQUIRED SPRINKLER HEADS IN WALK-IN FREEZER ROOMS SHALL BE PROVIDED WITH MECHANICAL VENTILATOR APPROVED BY THE HEALTH DEPARTMENT. 10. IT SHALL BECOME THE RESPONSIBILITY OF THE OWNER, ARCHITECT, ENGINEER, AND/OR GENERAL CONTRACTOR TO PROVIDE COPIES OF ALL ADDENDUMS AND CHANGES TO THE ADDENDUMS AND/OR CHANGES ATTEST ANY AREAS PERTINENT TO THE FOOD AND BEVERAGE PORTION. 11. GENERAL CONTRACTOR TO VERIFY STRUCTURAL INTEGRITY OF ROOF SUPPORTING ALL FOOD SERVICE EQUIPMENT SUCH AS COMPRESSOR RACKS, EXHAUST AND MAKE-UP AIR SYSTEMS, AIR CONDITIONING, ETC. PRIOR TO BEGINNING CONSTRUCTION. 12. GENERAL CONTRACTOR TO PROVIDE 6" HIGH CURBS WITH GALVANIZED CAP AS SHOWN ON PLANS FOR REFRIGERATION RACKS. 13. AND/OR ARCHITECT TO PROVIDE ADEQUATE VENTILATION AND COOLING FOR SPACES CONTAINING SELF-CONTAINED REFRIGERATION AND OTHER FOOD SERVICE ITEMS EMITTING HEAT. 14. GENERAL CONTRACTOR TO PROVIDE ALL NECESSARY HAND-RAILS AND FURNITURE TO MEET HANDICAP CODES. 15. GENERAL CONTRACTOR TO BE RESPONSIBLE FOR HANDICAP CLEARANCE REQUIREMENTS FOR ALL SPACES, DOOR STROKES, ETC. AND AS FAR AS PERTAIN TO CODE ENFORCEMENT AND INTERPRETATION. 16. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR ALL NOTES ON FOOD SERVICE PLANS AND TRANSMITTING INFORMATION TO SUBCONTRACTORS. 17. ALL PUBLIC USE AREAS ARE TO BE PROVIDED WITH HEATED AND REFRIGERATED CONDITIONING DESIGNED TO PROVIDE A COMFORTABLE ENVIRONMENT FOR CUSTOMERS PROVIDED AND INSTALLED BY H.V.A.C. CONTRACTOR. 18. WHEN SOUND/MUSIC SYSTEMS ARE INSTALLED, ELECTRICAL CONTRACTOR TO PROVIDE GROUNTS AND MAKE ALL NECESSARY ELECTRICAL HOOK-UPS. 19. S.C. TO VERIFY SOLS TESTING RESULTS FOR CORROSION AND INSTALLATION OF UNDERGROUND SERVICES PRIOR TO STARTING CONSTRUCTION. 20. S.C. TO PROVIDE WEEKLY JOB-SITE MEETINGS WITH KITCHEN PROFESSIONALS FROM START OF CONSTRUCTION THRU COMPLETION. 21. S.C. SHALL BE RESPONSIBLE FOR PROPER INSTALLATION AND TESTING OF FACILITY FIRE SPRINKLER SYSTEMS, WHERE FOOD SERVICE EQUIPMENT FIRE SUPPRESSION SYSTEMS ARE UTILIZED AND INTERCONNECTED WITH BUILDING FIRE SYSTEMS AND ALARMS. S.C. SHALL BE RESPONSIBLE FOR ALL PERMITS, CONNECTIONS, TESTING, AND SYSTEM ENGINEERING. 22. ALL MATERIALS USED ON THIS PROJECT SHALL CONFORM TO LOCAL FLAMMABILITY REQUIREMENTS. 23. ALL WORK SHALL CONFORM TO LOCAL BUILDING, SAFETY, FIRE, AND HEALTH REGULATIONS. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY LICENSES AND BUILDING REQUIREMENTS, PAYING FEES, AND PASSING INSPECTION. IT IS HIS RESPONSIBILITY TO VERIFY ALL NECESSARY CODES AND REQUIREMENTS PRIOR TO IMPLEMENTATION. 24. ALL MATERIALS FOR FLOORS, WALLS AND CEILINGS SHALL BE INSTALLED PER MANUFACTURER'S INSTRUCTIONS. 25. IF THERE ARE ANY AMBIGUITIES, DISCREPANCIES OR IRREGULARITIES, VERIFY WITH KITCHEN PROFESSIONALS PRIOR TO COMMENCING WORK. 26. ALL DRAWINGS BY KITCHEN PROFESSIONALS ARE FOR INTERIOR FINISH INFORMATION ONLY. NOT FOR CONSTRUCTION. 27. ANY ALTERNATE SELECTIONS FOR FINISHES, FIXTURES, ETC. SHALL BE SUBMITTED TO KITCHEN PROFESSIONALS. 28. VERIFY ALL DIMENSIONS AND CONDITIONS AT THE JOB SITE PRIOR TO PROCEEDING WITH WORK. 29. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR LEAVING ALL AREAS CLEAN AND CLEAR OF DEBRIS. 30. PARTITIONS ARE DIMENSIONED FROM FINISHED SURFACE, UNLESS OTHERWISE NOTED. 31. CONTRACTORS SHALL SUBMIT ALL SHOP DRAWINGS, FINISHES, STAINS AND COLORS TO THE DESIGNER FOR APPROVAL PRIOR TO FABRICATION. 32. WHERE DROPPED FASCIA IS INDICATED, GYPSUM BOARD SOFFIT IS TO BE RETURNED TO WALL BEHIND (UNLESS OTHERWISE NOTED). 33. CONTRACTOR TO PROVIDE TITLE 24 ENGINEERING CALCULATIONS FOR BUILDING PERMIT REQUIREMENTS. 34. ALL CONSTRUCTED WALLS AND PARTITIONS ARE TO BE COVERED WITH DECORATIVE MATERIAL OR PAINTED PER DESIGNER'S SPECIFICATIONS. 35. ALL WORK IS TO BE COMPLETED IN CRAFTSMAN LIKE MANNER AND CONFORM TO ALL APPLICABLE BUILDING AND SAFETY CODES. 36. GENERAL CONTRACTOR SHALL VERIFY AND COORDINATE EXACT LOCATION OF COMPRESSOR RACK(S) WITH ARCHITECT AND SHALL PROVIDE ACCESS FOR DELIVERY AND INSTALLATION OF EACH COMPRESSOR RACK. 37. ALL HOT WATER & FAUCET TO BE 120" MINIMUM. 38. EXHAUST HOOD SHALL OVER HANG ALL COOKING EQUIPMENT MEASURED FROM THE OUTER EDGE OF THE COOKING SURFACE TO THE INSIDE EDGE OF THE HOOD.	1. ALL FOOD SERVICE AND RELATED EQUIPMENT SHALL BE NSF APPROVED AND IN CONFORMITY WITH LOCAL HEALTH REGULATIONS. INSTALLATION OF EQUIPMENT SHALL MEET THE SAME REQUIREMENTS. 2. FLOORS IN FOOD PREPARATION AREAS SHALL BE SMOOTH AND IMPERVIOUS TO WATER, GREASE, AND ACID AND OF EASILY CLEANABLE CONSTRUCTION. FLOORS IN HALL AREAS WHERE FOOD IS PREPARED, PACKAGED OR STORED OR WHERE REFUSE OR GARBAGE IS STORED, SANITATION FACILITIES AND IN ALL TOILET AND HAND WASHING AREAS, SHALL BE AN APPROVED TYPE THAT CONTINUES UP THE WALLS AND UP TOE KICKS AT LEAST 4" WITH A MINIMUM 5/8" RADIUS CORNER. TOPSET BASE IS ONLY ACCEPTABLE IN THE DINING AREAS. 3. ALL REFRIGERATION EQUIPMENT SHALL HAVE A THERMOMETER WHICH IS EASILY READABLE IN PROPER WORKING CONDITION. 4. WALLS IN FOOD PREPARATION AREAS AND DISHWASHING AREAS SHALL BE SMOOTH AND NON-ABSORBENT WITH A LIGHT COLORED, EASILY CLEANABLE FINISH. ALL PAINTED SURFACES SHALL BE SEALED WITH A GLOSS OR SEMI-GLOSS ENAMEL. 5. CEILINGS IN KITCHEN PREPARATION AREAS SHALL BE SMOOTH AND NON-ABSORBENT WITH A LIGHT COLORED, EASILY CLEANABLE FINISH. ALL PAINTED SURFACES SHALL BE SEALED WITH A GLOSS OR SEMI-GLOSS ENAMEL. 6. LAVATORY SINKS SHALL BE PROVIDED IN THE FOOD PREP, JANITOR AREA, SOAP AND SANITARY TOWELS SHALL BE PROVIDED IN SINGLE SERVICE, PERMANENTLY INSTALLED DISPENSERS AT THE LAVATORY SINKS. 7. TOILET FACILITIES SHALL BE PROVIDED WITHIN EACH FOOD ESTABLISHMENT CONVENIENT FOR THE EMPLOYEES. ALL TOILET ROOMS SHALL BE PROVIDED WITH MECHANICAL VENTILATOR APPROVED BY THE HEALTH DEPARTMENT. 8. A ROOM OR ENCLOSURE AT LEAST 5'X5' SEPARATED FROM THE MAIN KITCHEN AREA SHALL BE PROVIDED FOR EMPLOYEES TO CHANGE AND STORE THEIR CLOTHES AND PERSONAL BELONGINGS. 9. ALL DELIVERY DOORS LEADING TO THE OUTSIDE SHALL OPEN OUTWARD AND BE SELF-CLOSING. AIR CURTAIN SHALL PROVIDE AN OVERHEAD AIR CURTAIN. AIR CURTAIN SHALL PRODUCE A THICK AT THE NOZZLE WITH AN AIR VELOCITY OF NOT LESS THAN 500 FPM ACROSS ENTIRE OPENING. 10. ALL LIGHTS ABOVE FOOD AREAS MUST HAVE FIXTURES WITH SHATTERPROOF GUARDS OR SHATTERPROOF BULBS, RACKS. 11. OPENABLE WINDOWS SHALL BE SCREENED WITH NO MORE THAN 1/8" MESH SCREENING. FOOD SERVICE PASS-THROUGH OPENINGS TO THE OUTSIDE SHALL BE LIMITED TO A MAXIMUM SIZE OF 36" X 36" INCHES. THE OPENING SHALL BE BETWEEN THE OPENINGS SHALL NOT BE LESS THAN EIGHTEEN INCHES.
ACCESSIBILITY NOTES	FIRE DEPT. NOTES
1. A CLEAR SPACE 60" IN DIAMETER AND 27" HIGH OR 54"x60" WITH 12" MAXIMUM INTRUSION BY DOOR SHALL BE PROVIDED IN RESTROOM. 2. TOILET FACILITIES AND AT LEAST ONE TOILET COMPARTMENT SHALL BE CLEAR AND UNOBSTRUCTED BY DOOR SWINGS, GRAB BARS AND SIMILAR ITEMS OF NOT LESS THAN 32" CLEARANCE. 3. 48" MINIMUM CLEARANCE SHALL BE PROVIDED IN FRONT OF TOILET STOOL. 4. A CLEAR SPACE OF 30" WIDE BY 48" DEEP SHALL BE PROVIDED IN FRONT OF URINALS AND LAVATORIES. 5. GRAB BARS SHALL BE PROVIDED ON TWO SIDES OR ONE SIDE AND THE BACK OF AT LEAST ONE TOILET COMPARTMENT. 6. AT LEAST ONE MIRROR SHALL BE INSTALLED SO THAT THE BOTTOM MIRROR IS WITHIN 40" OF FINISHED FLOOR. 7. URINALS TO BE FLOOR LEVEL OR AT LEAST ONE WALL HANG AT 48" HANGING HEIGHT MEASURED TO TOP EDGE OF BOWL ABOVE FINISHED FLOOR.	1. MAINTAIN 44" MINIMUM AISLES TO REQUIRED EXITS. 2. DOORS OPENING INTO REQUIRED ONE HOUR FIRE RESISTIVE CORRIDORS SHALL BE PROTECTED WITH A SMOKE OR DRAFT STOP-FIRE ASSEMBLY HAVING A 20 MINUTE RATING. 3. INTERIOR WALL AND CEILING FINISHES MINERAL GLASS-FIBER, VERFIBRE EXTRACTS, FLAME SPREAD (I) = 0-25, OTHER EXTRACTS FLAME SPREAD (I) = 26-75, RPOODS OR AREAS (FLAME SPREAD (I) = 76-200). 4. ALL DECORATIONS USED SHALL BE NON-COMBUSTIBLE OR FLAME PROTECTED IN AN APPROVED MANNER. 5. FIRE DAMPERS OR DOORS SHALL BE PROVIDED WHERE AIR DUCTS PENETRATE FIRE RATED WALL OR CEILING. ALL DUCT OPENINGS AND LIMITED IN AREA TO 100 SQUARE INCHES IN ANY 100 SQUARE FEET OF CEILING. UNLESS OPENING ONE HOUR RATED ASSEMBLY APPROVED BY BUILDING DEPARTMENT. 6. WALL FINISH TO MEET LOCAL BUILDING CODE REQUIREMENTS AS REQUIRED FOR ALL FIRE RATED AREAS. 7. EXIT DOORS SHALL SWING IN THE DIRECTION OF EXIT TRAVEL WHEN SERVING MORE THAN 50 PERSONS. 8. ALL DOORS SHALL BE OPENABLE FROM THE INSIDE WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE OR EFFORT AND OPENABLE WITH A SINGLE EFFORT. SPECIAL LOCKING DEVICES SHALL BE OF A TYPE APPROVED BY THE FIRE MARSHALL. 9. THE FLOOR ON THE INSIDE AND OUTSIDE OF EACH DOOR SHALL BE LEVEL FOR A DISTANCE OF 5 FEET FROM THE DOOR IN THE DIRECTION OF THE DOOR SWINGS. 10. PARKING AREAS SHALL BE PROVIDED ON EXIT DOORS SERVING ROOM CORRIDORS OF STAIRWAYS HANDLING AN OCCUPANT CAPABILITY OF 50 OR MORE PERSONS, OR 100 OR MORE PERSONS, OR 10 OR MORE IN MOTION PICTURE THEATERS.

RESUME

DATE: 06/07/2015
SHEET: 00/04/2015
PROJECT: 1545 Health Street
PHONE: 310-333-4465
FAX: 310-333-2220

CONSULTANTS

hla
howard laks architects
1545 Health Street
Santa Monica, CA 90401
voice: 310-333-4465
fax: 310-333-2220

710 WILSHIRE BOULEVARD
MIXED-USE HOTEL PROJECT
SANTA MONICA - CALIFORNIA 90401

Kitchen Professionals
18742 Culver Street, Suite 103
Huntington Beach, CA 92647
Phone: 714.841.0531 Fax: 714.441.9986

DRAWN: JL
CHECKED: CH
APPROVED: -
SCALE: 1/4" = 1'-0"
SHEET: K-0.1.1

DATE: June 25, 2013
PROJECT NUMBER: HLA 0000000-00000