AD101

DEMOLITION DETAIL - BOLLARDS


- PROTECT EXISTING METAL DECK, METAL PANEL, EXISTING DOWNSPOUT. PREPARE EXISTING GUTTER FOR ADDITIONAL ADJACENT NEW GUTTER. PREPARE EXISTING SPINKLER SYSTEM FOR ADDITIONAL NEW SPRINKLER SYSTEM.

PREPARE EXISTING METAL DECK FOR ADJACENT NEW METAL DECK




SEE MECHANICAL & ELECTRICAL DRAWINGS FOR ADDITIONAL



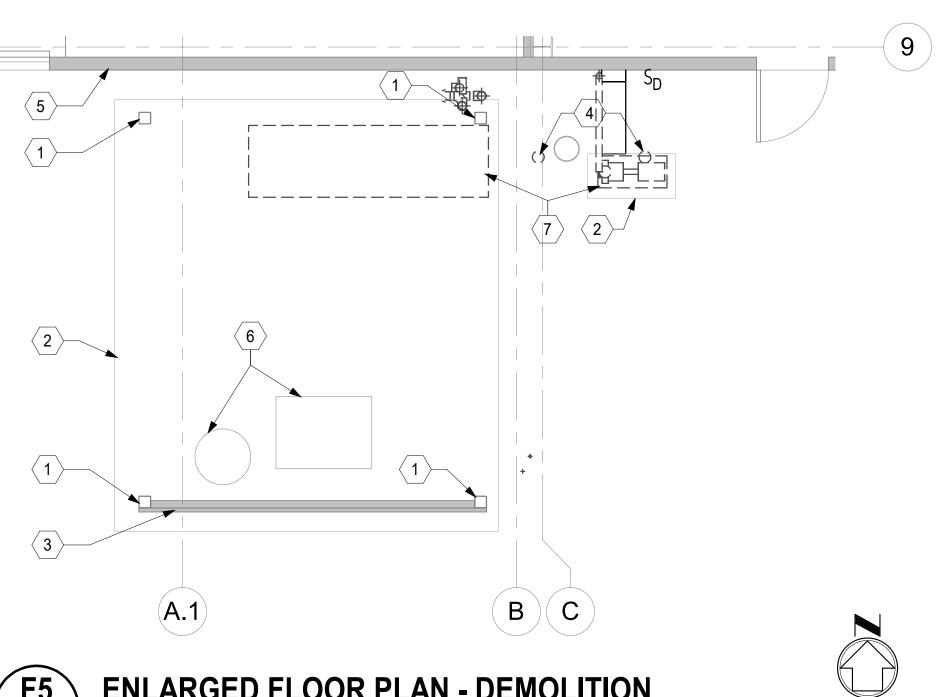

ENLARGED FLOOR PLAN - DEMOLITION SCALE: 1/4" = 1'-0"



GENERAL NOTES

- EXISTING CONDITIONS SHOWN ON DRAWINGS ARE FOR INFORMATIONAL PURPOSES ONLY AND DO NOT SHOW ALL CONDITIONS THAT MAY AFFECT THE WORK OF THIS CONTRACT. CONTRACTOR MUST FIELD VERIFY ALL EXISTING CONDITIONS. REFER TO ALL ARCHITECTURAL, CIVIL, MECHANICAL, ELECTRICAL, AND STRUCTURAL DRAWINGS FOR ADDITIONAL DEMOLITION INFORMATION AND COORDINATION.
- 2. FIELD VERIFY EXISTING CONDITIONS BEFORE COMMENCING ANY WORK. ARCHITECT MUST BE NOTIFIED IMMEDIATELY OF ANY DISCREPANCIES DETRIMENTAL TO THE PROPER EXECUTION OF NEW CONSTRUCTION.
- 3. ALL DEMOLITION WORK MUST COMPLY WITH APPLICABLE BUILDING CODE AND ALL APPLICABLE LOCAL, STATE, AND FEDERAL LAWS, ORDINANCES, AND REGULATIONS. SEE CODE SUMMARY SHEET FOR APPLICABLE BUILDING CODE.
- REMOVE EXISTING CONSTRUCTION TO THE EXTENT INDICATED ON THE DRAWINGS. PROTECT ALL OTHER EXISTING STRUCTURES ON ADJACENT PROPERTIES FROM DAMAGE THROUGHOUT CONSTRUCTION. SHOULD ANY DAMAGE OCCUR TO ANY EXISTING CONSTRUCTION ON ADJACENT PROPERTIES OR EXISTING CONSTRUCTION TO REMAIN ON SITE, THE CONTRACTOR MUST REPAIR THE DAMAGE TO THE SATISFACTION OF THE PROPERTY OWNER.
- . CONTRACTOR MUST PROTECT ALL EXISTING CONSTRUCTION NOTED TO REMAIN FROM DAMAGE AND SOILING DURING DEMOLITION. REMOVE DEBRIS REGULARLY AS NECESSARY TO ELIMINATE INTERFERENCE.
- 6. ALL DEMOLISHED MATERIALS MUST BE LEGALLY DISPOSED OF PROMPTLY. DO NOT ALLOW DEMOLISHED MATERIALS TO ACCUMULATE ON SITE. NO BURNING IS ALLOWED.
- . PROTECT ALL ADJACENT AREAS FROM THE DEMOLITION. REPAIR OR REPLACE, AT NO COST TO THE OWNER, ALL AREAS OR ITEMS DAMAGED DURING THE DEMOLITION.
- B. PRIOR TO COMMENCEMENT WITH ANY DEMOLITION WORK, CONTRACTOR MUST IDENTIFY ALL ELECTRICAL CIRCUITS SERVICING THE AREA INVOLVED WITH THIS DEMOLITION. THOSE CIRCUITS MUST THEN BE LOCKED OUT AND TAGGED OUT IF THEY DO NOT SERVICE ANY OF THE REMAINING BUILDING. THOSE CIRCUITS WHICH ARE IDENTIFIED TO SERVICE BOTH THE AREA TO BE DEMOLISHED AND THE REMAINING BUILDING MUST BE SPLIT SO AS TO KILL ALL ELECTRICAL POWER TO THE AREA TO BE DEMOLISHED WHILE MAINTAINING POWER TO THE REMAINDER OF THE BUILDING.

KEYNOTES - DEMO

NO.	DESCRIPTION
1	EXISTING COLUMN TO REMAIN
2	EXISTING CONCRETE PAD TO REMAIN.
3	EXISTING WALL TO REMAIN
4	DEMOLISH EXISTING BOLLAR
5	EXISTING BUILDING TO REMAIN
6	EXISTING MECHANICAL EQUIPMENT TO REMAIN.
7	DEMOLISH MECHANICAL EQUIPMENT.

KEY PLAN

DEMOLITION DETAILS -CHILLER YARD

PLA2021-0432-0002D

AD101