



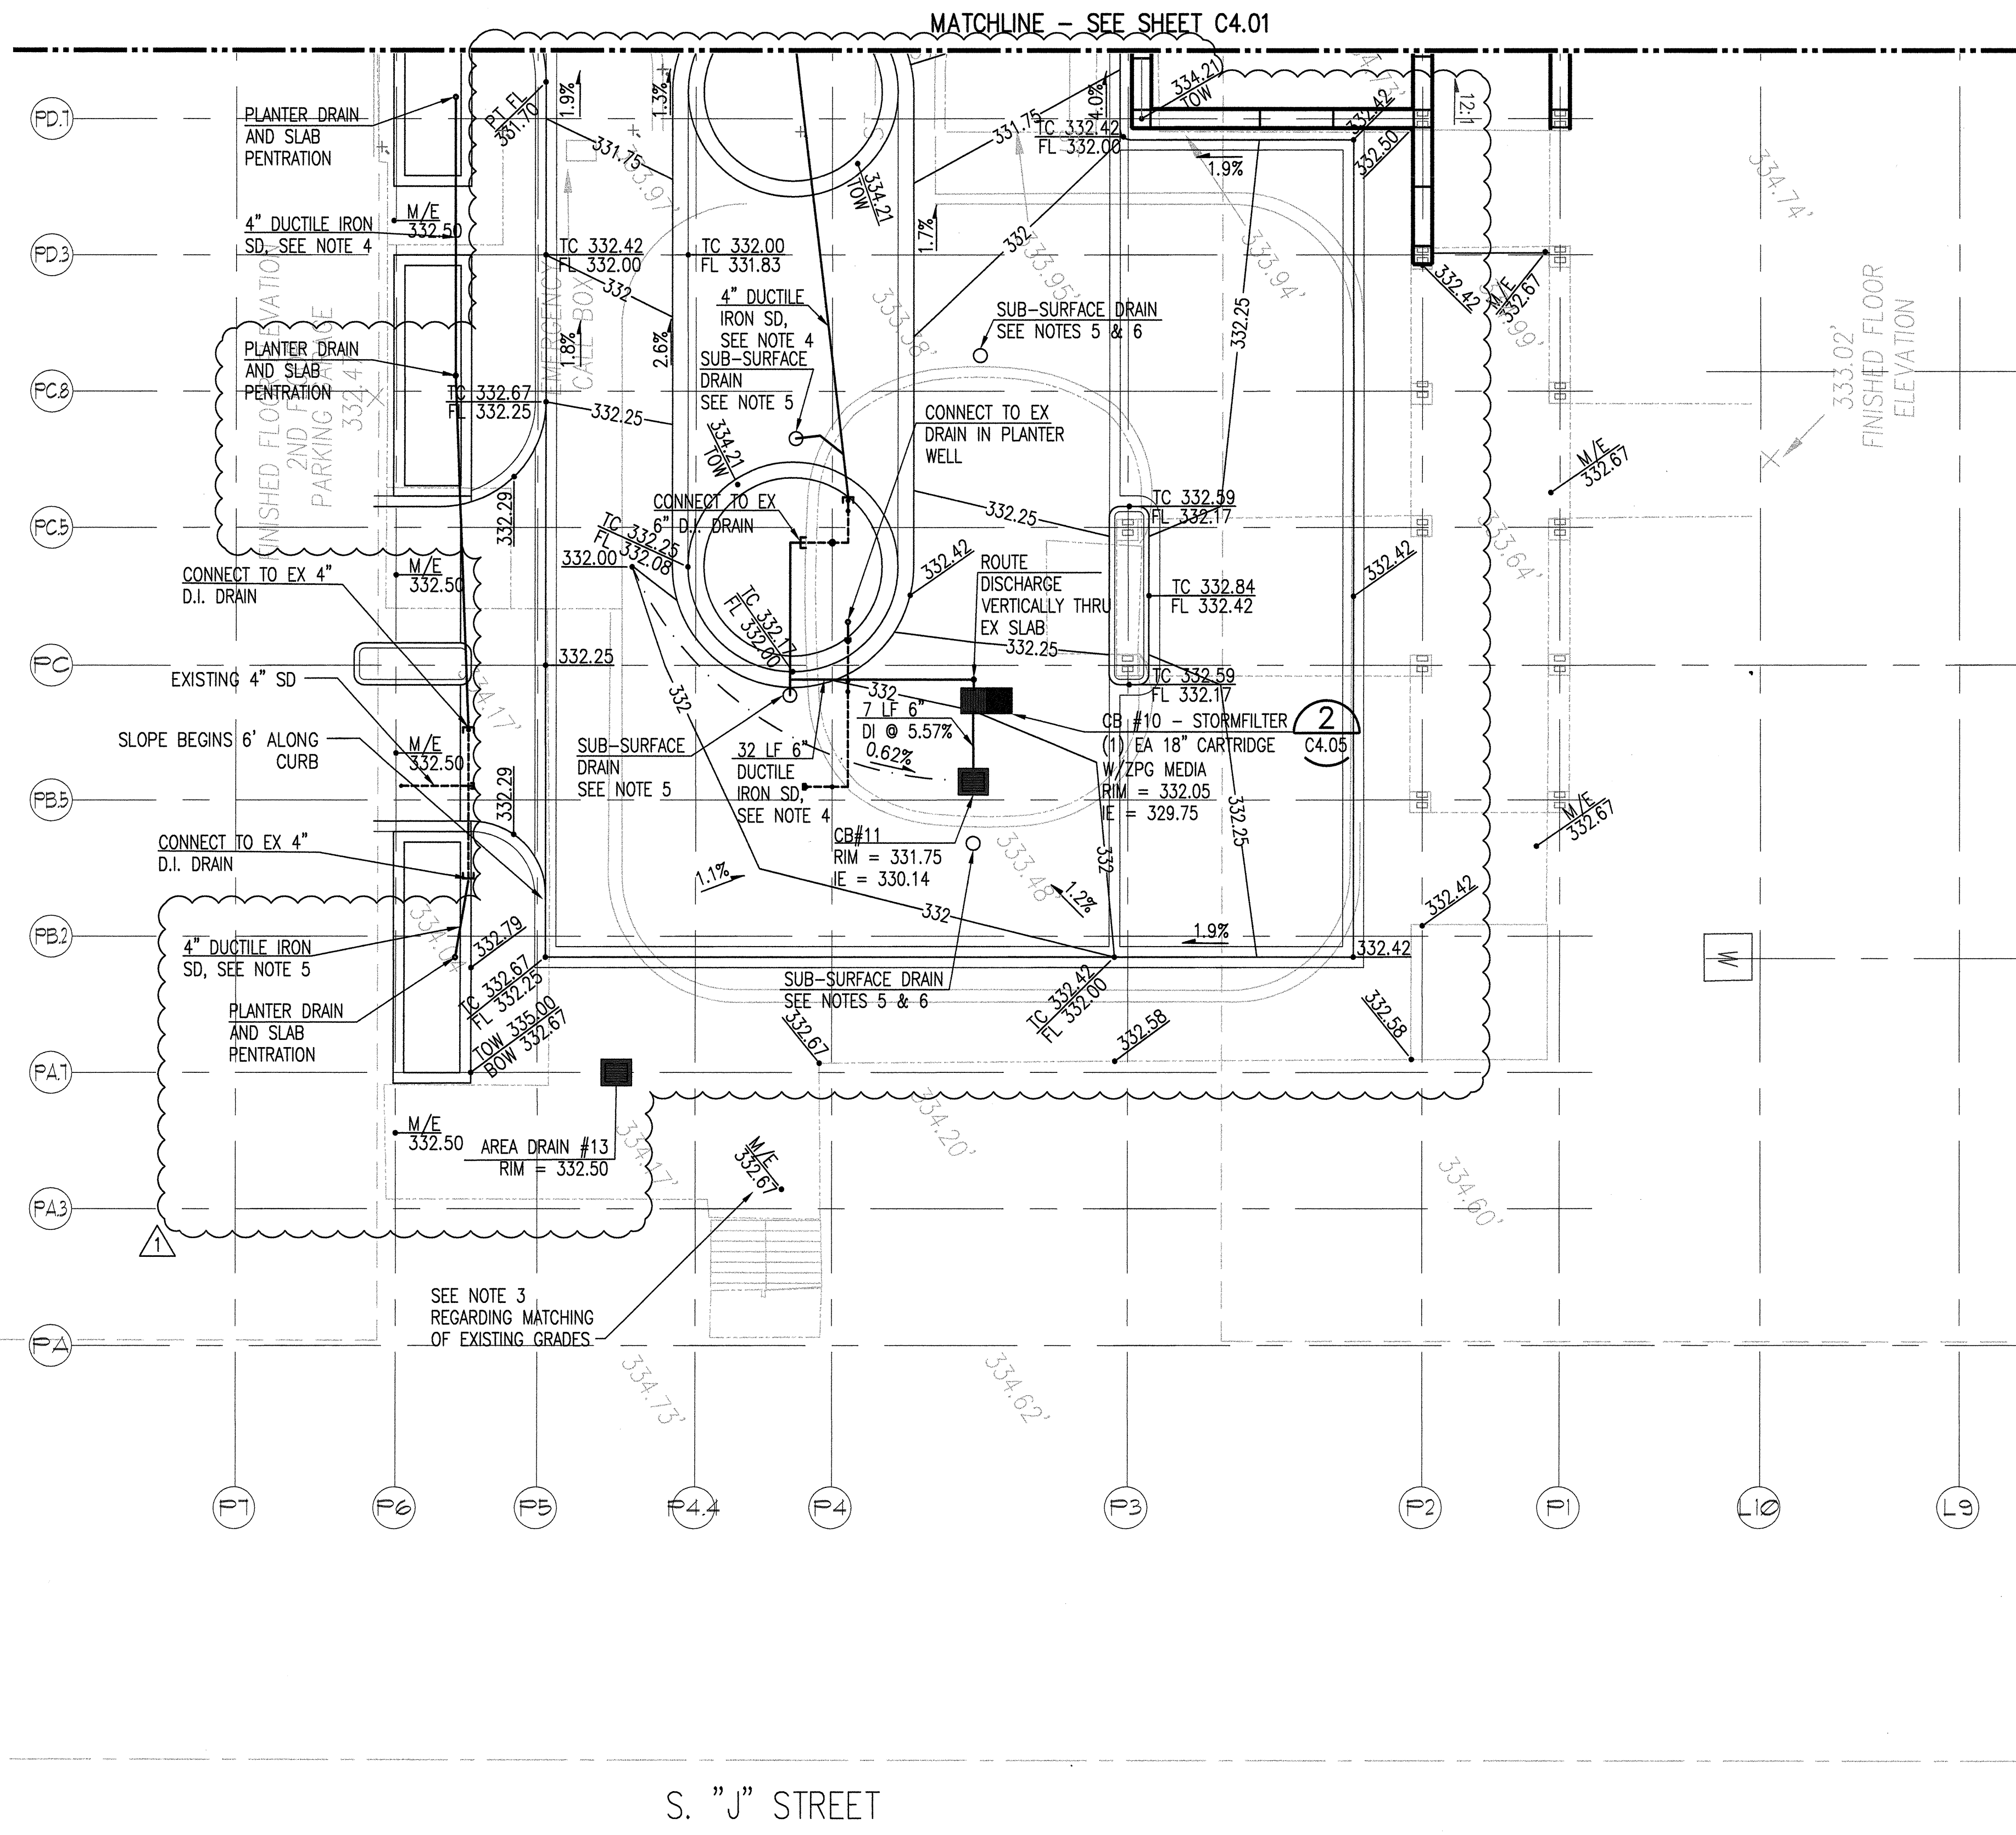

- NOTES:**
- SEE BUILDING MECHANICAL DRAWINGS FOR DISCHARGE FROM TRENCH DRAIN OVER STRUCTURE.
 - SEE C4.05 FOR DRAINAGE STRUCTURE LOCATION SCHEDULE.
 - CONTRACTOR SHALL FIELD VERIFY EXISTING GRADES WHERE MATCHING CONDITIONS OCCUR. NOTIFY ENGINEER IN THE EVENT THAT DISCREPANCIES ARE DISCOVERED IN EXCESS OF 1/4 INCH.
 - SUSPEND FROM LEVEL 1 GARAGE CEILING USING ANVIL ADJUSTABLE CLEVIS FOR DUCTILE IRON PIPE, GALVANIZED @ 16 FT O.C. MAINTAIN MIN 1/4 INCH /FT SLOPE.
 - LOCATE SUB-SURFACE DRAIN AT NATURAL LOW POINT OF EXISTING SLAB. DRAIN SHALL EXTEND TO SURFACE WITH A SOLID LID AT FINISH GRADE. SUB-SURFACE DRAIN SHALL BE JAY R SMITH MFG. CO. 1419 PROMENADE DECK DRAIN, OR APPROVED EQUAL.
 - CONNECT TO EXISTING STORM DRAINAGE PIPING THROUGH SLAB.


- LEGEND:**
- 332.50 PROPOSED CONTOUR
 - 330.00 PROPOSED FINISH GRADE ELEVATION
 - 332.250 EXISTING GRADE ELEVATION
 - 332.250 PROPOSED TOP OF WALL ELEVATION
 - 332.250 PROPOSED TOP OF CURB ELEVATION
 - 332.250 PROPOSED BACK OF WALK ELEVATION
 - R RIDGELINE
 - B GRADE BREAK
 - 1% SLOPE

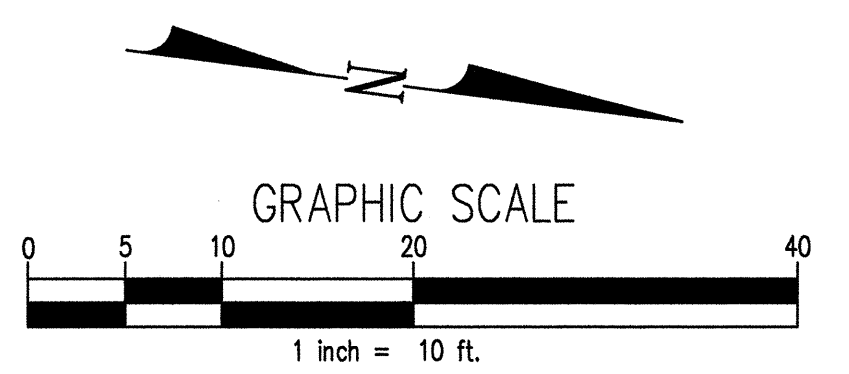

kpff Consulting Engineers
 1201 Pacific Avenue, Suite 800
 Tacoma, Washington 98402
 (253) 396-0150 Fax (253) 396-0162

**CALL 48 HOURS
 BEFORE YOU DIG
 1-800-424-5555**

Giffin • Bolte • Jurgens
 ARCHITECTS
 815 S.W. SECOND AVENUE • PORTLAND, OREGON 97204
 (503) 223-0992 www.gbjarch.com FAX (503) 294-3961

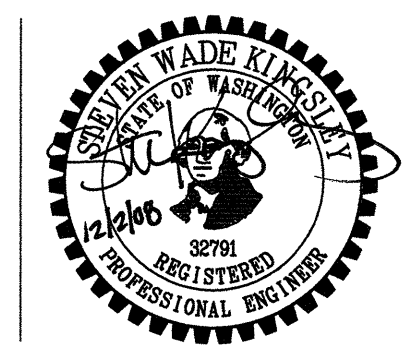

MultiCare
EMERGENCY DEPARTMENT & CANCER CENTER EXPANSION
 TACOMA, WASHINGTON

CCD #02	12-03-2008				

Date 09-26-2008
 Scale 1" = 10'
 Drawn By REB
 Job No. 4034

**GRADING AND
 DRAINAGE
 PLAN**

**C4
 03**