


A  
B  
C  
D  
E

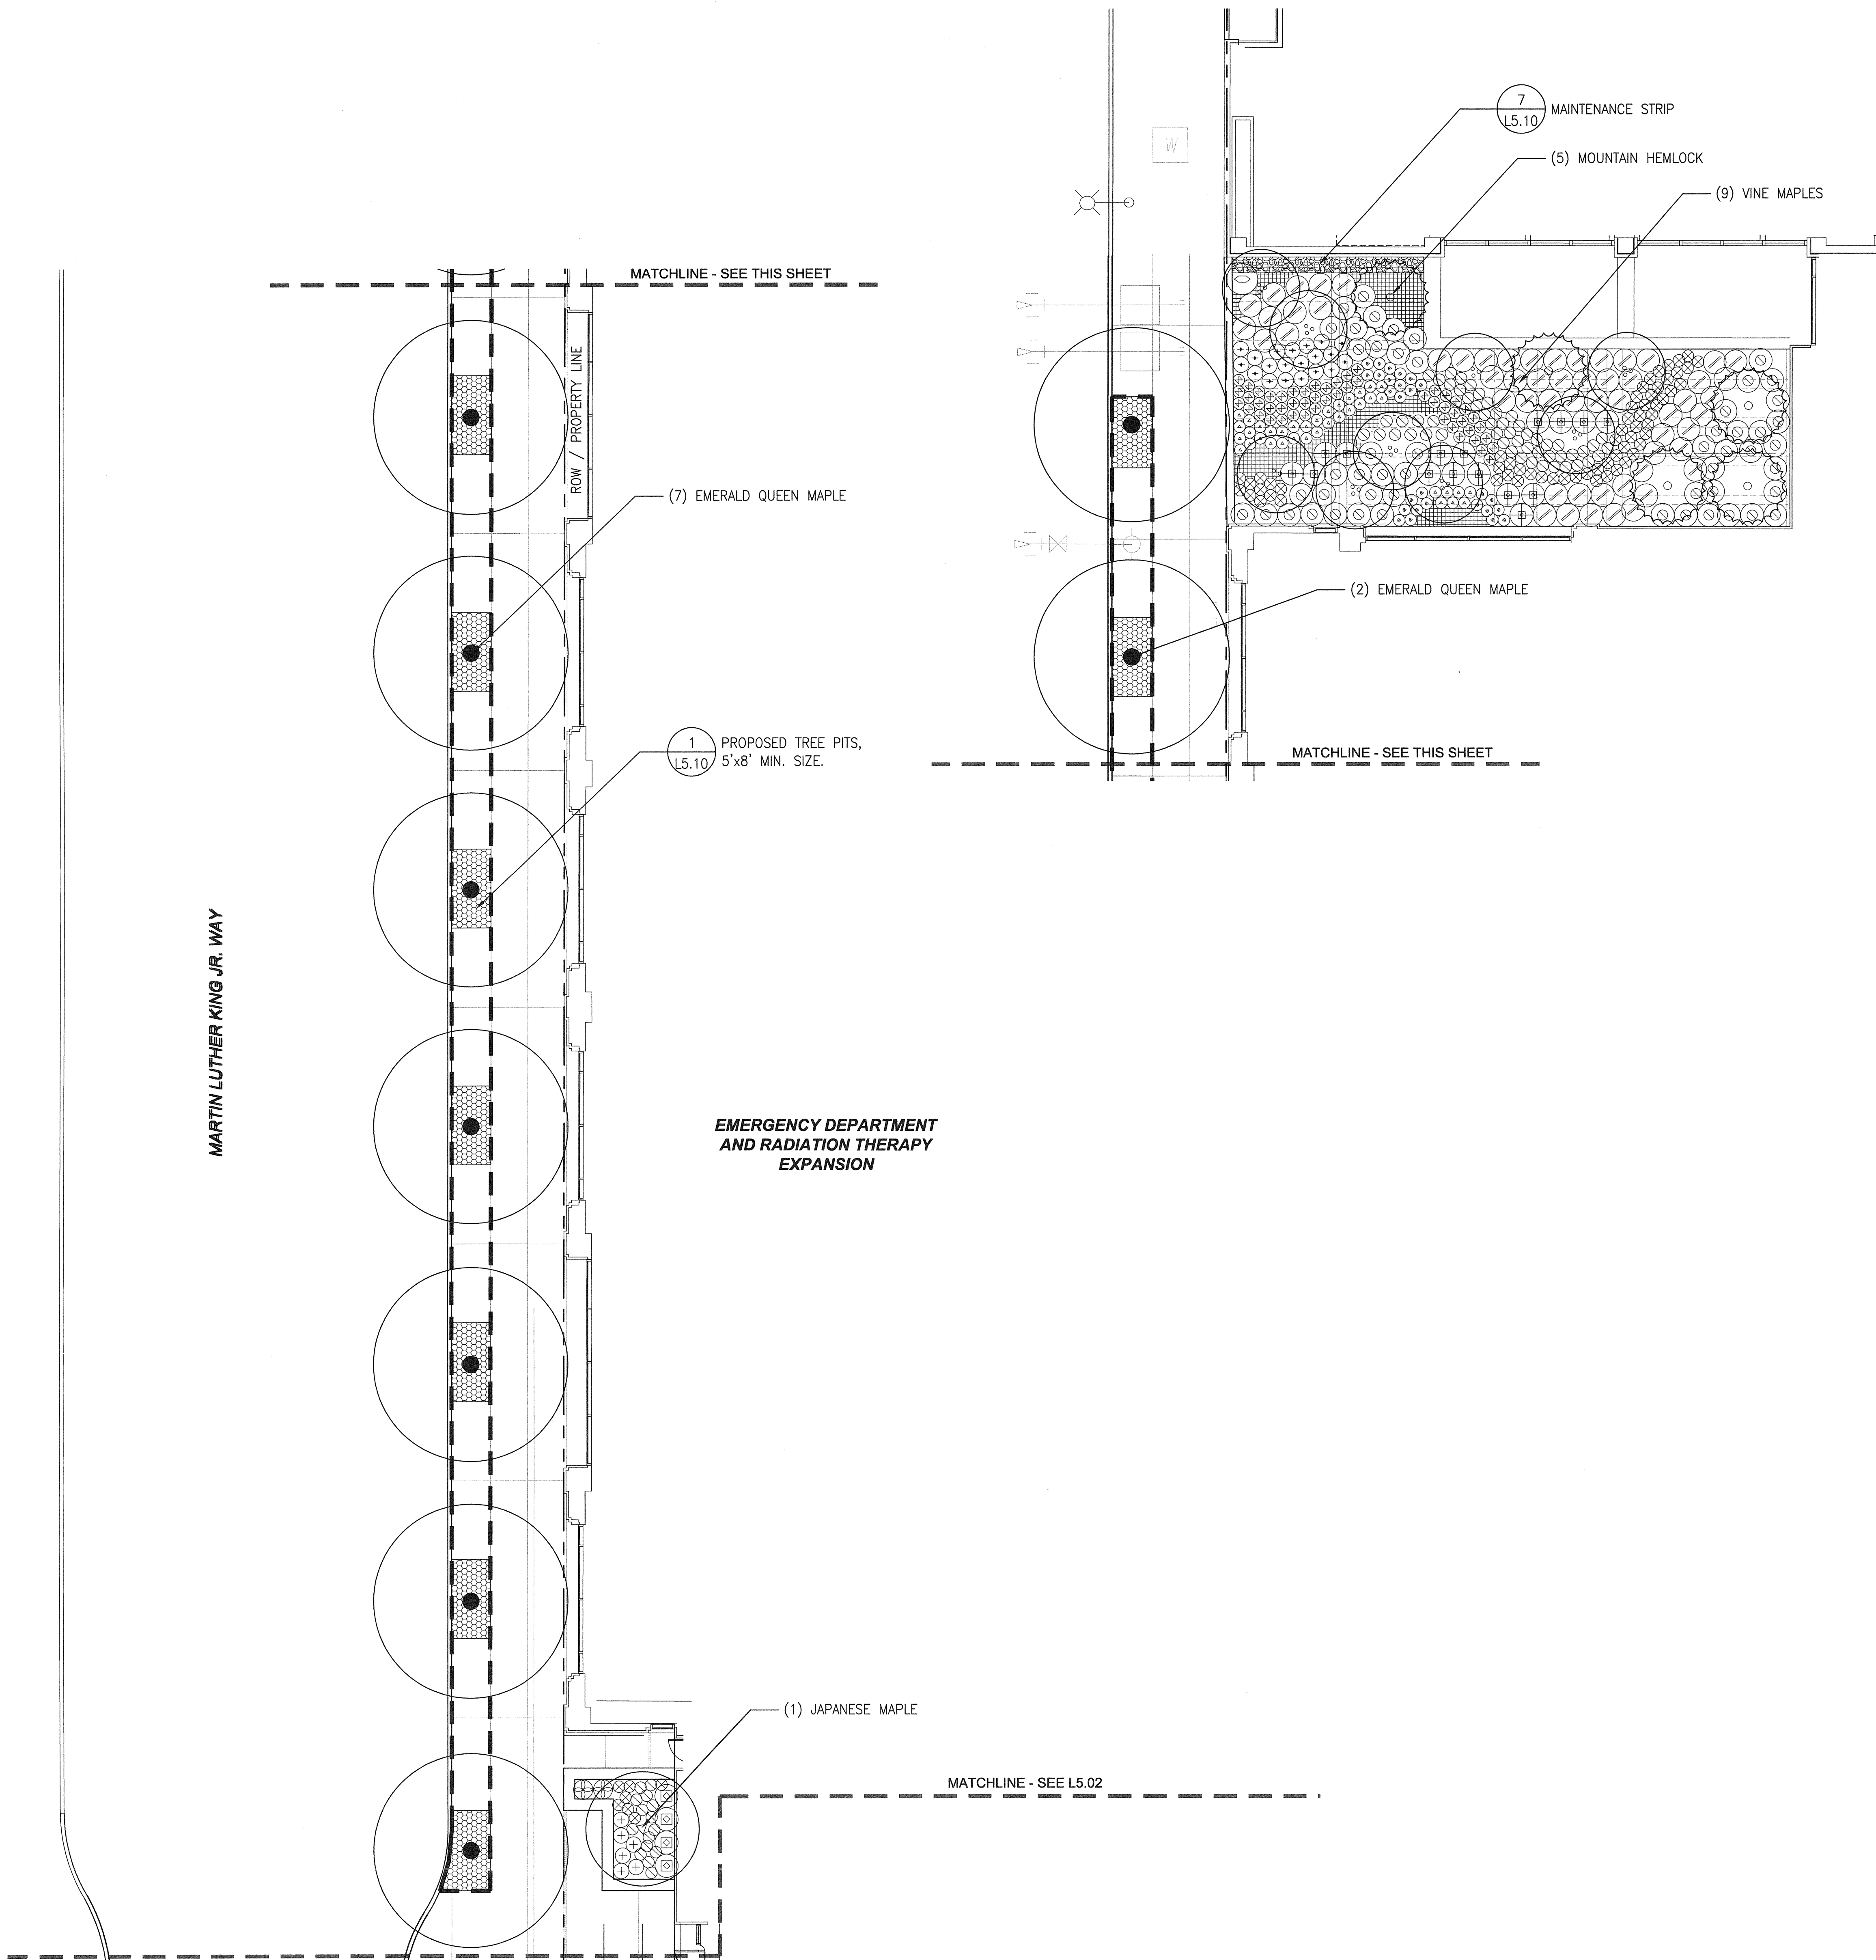

1 PLANTING PLAN  
SCALE: 1" = 10' - 0"

#### PLANT LIST

Symbols	QTY	Abv.	Latin Name	Common Name	Size	Spacing	Remarks
---------	-----	------	------------	-------------	------	---------	---------

#### EXISTING STREET TREES TO REMAIN

●	-	-	Preserve & Protect	-			
---	---	---	--------------------	---	--	--	--

#### CONIFEROUS TREES

●	5	TM	Tsuga mertensiana	Mountain Hemlock	8-10' Ht. min.	As Shown	Uniform w/ Full Crown
---	---	----	-------------------	------------------	----------------	----------	-----------------------

#### DECIDUOUS AND ORNAMENTAL TREES

●	9	AC	Acer circinatum	Vine Maple	1-1/2" Cal. min. on main stem.	As Shown	Multi-stem: min 3/clump
●	11	AP	Acer Platanoides 'Emerald Queen'	"Emerald Queen" Maple	3" Cal. min. 12'-14' Ht. min.	As Shown	Uniform w/ Full Crown
●	16	AR	Acer Rubrum 'Bowhall'	Bowhall Maple	2-1/2" Cal. min. 10'-12' Ht. min.	As Shown	Well-branched, Full Crown
●	3	AP	Acer Palmatum	Japanese Maple	Min. 1-1/2" Cal.	As Shown	Well-branched, Full Crown

#### SHRUBS

Symbols	QTY	Abv.	Latin Name	Common Name	Size	Spacing	Remarks
⊕	16	AC	Acanthus caroli-alexandri	Bear's Breeches	5 Gal.	18" o.c.	Full, rooted in container
⊕	52	AH	Anemone x hybrida 'Serenade'	Japanese Anemone	1 Gal.	18" o.c.	Full, rooted in container
⊕	49	BT	Berberis thunbergii f. atropurpurea 'Rose Glow'	Japanese Barberry	2 Gal.	18" o.c.	Full, rooted in container
⊕	16	BT	Daphne x burkwoodii 'Carol Mackie'	'Carol Mackie' Daphne	5 Gal.	36" o.c.	Full, rooted in container
⊕	23	CT	Choisya ternata 'Sundance'	Mexican Orange Blossom	5 Gal.	30" o.c.	Full, rooted in container
⊕	31	CS	Cornus sericea 'Kelsey'	Kelsey's Dogwood	2 Gal.	24" o.c.	Full, rooted in container
⊕	51	EC	Euphorbia characias subsp. wulfenii	Large Mediterranean Spurge	2 Gal.	30" o.c.	Full, rooted in container
⊕	116	GA	Geranium 'Ann Folkard'	Cranesbill Geranium	1 Gal.	24" o.c.	Full, rooted in container
⊕	317	HM	Hakonechloa macro 'Aureola'	Japanese Forest Grass	1 Gal.	18" o.c.	Full, rooted in container
⊕	27	HH	Helleborus x hybridus	Lenten Rose	1 Gal.	18" o.c.	Full, rooted in container
⊕	38	HP	Heuchera x 'Plum Pudding'	Coral Bells 'Plum Pudding'	1 Gal.	18" o.c.	Full, rooted in container
⊕	73	HU	Hosta 'June'	Hosta	1 Gal.	18" o.c.	Full, rooted in container
⊕	8	HE	Hydrangea Mac. 'Endless Summer'	Endless Summer Hyd.	5 Gal.	36" o.c.	Full, rooted in container
⊕	4	HN	Hydrangea Mac. 'Nikko Blue'	Nikko Blue Hyd.	5 Gal.	36" o.c.	Full, rooted in container
⊕	58	PM	Polystichum munitum	Sword Fern	2 Gal.	36" o.c.	Full, rooted in container
⊕	52	SC	Sarcococca confusa	Sweet Box	3 Gal.	36" o.c.	Full, rooted in container
⊕	156	VB	Viburnum davidii	David Viburnum	5 Gal.	36" o.c.	Full, rooted in container
⊕	7	VD	Viburnum x bodnantense 'Dawn'	Pink Dawn Viburnum	15 Gal., 4-5' Ht.	As Shown	Full, rooted in container


#### GROUNDCOVERS

Symbols	QTY (SQ. FT.)	Abv.	Latin Name	Common Name	Size	Spacing	Remarks
■	150'	ER	Epimedium x rubrum	Epimedium ssp.	1 Gal.	12" o.c.	Full, rooted in container
■	1215'	RC	Rubus Calycinoides	Creeping Bramble	1 Gal.	12" o.c.	Full, rooted in container
■	200'	VM	Vinca Minor 'Bowles'	Periwinkle	1 Gal.	18" o.c.	Full, rooted in container

□ EXTENT OF STRUCTURAL SOIL

#### PLANTING NOTES

- GENERAL: THESE NOTES ARE HIGHLIGHTS FROM THE SPECIFICATIONS AND INTENDED TO PROVIDE CLARIFICATION AND DIRECTION TO CERTAIN ASPECTS OF THE PLANTING. IF THESE NOTES ARE IN CONFLICT WITH THE SPECIFICATIONS AND DRAWINGS, THE SPECIFICATIONS WILL PREVAIL.
- LANDSCAPE ARCHITECT WILL APPROVE FINISH GRADES AT ALL LANDSCAPE AREAS PRIOR TO PLANTING. FINISH GRADES AT PLANTING AREAS SHALL MEET THE SPECIFIED CRITERIA FROM TOP OF ADJACENT HEADER, WALL, CURB, OR FINISHED SURFACE OF WALK.
  - THE CONTRACTOR SHALL BE RESPONSIBLE FOR FINAL PLANT COUNTS, QUANTITIES, OR AREA CALCULATIONS. THE QUANTITIES OR AREA COUNTS HEREIN ARE FOR THE CONTRACTORS CONVENIENCE ONLY.
  - FINAL LAYOUT OF ALL PLANT MATERIALS WILL BE COORDINATED WITH LANDSCAPE ARCHITECT. CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING AND ACCOUNTING FOR ALL BID QUANTITIES IN EACH CATEGORY AS OUTLINED ABOVE. ANY PLANTS THAT ARE NOT USED AS PART OF THIS ALLOWANCE SHALL BE CREDITED TO THE OWNER.
  - ANY ROCK, CLOUDS, OR DEBRIS GREATER THAN 3/4" SHALL BE REMOVED FROM SHRUB, LAWN, OR GROUNDCOVER AREAS.
  - FINISHED INSTALLATIONS AT THE CROWN OF PLANTS SHALL BE HIGHER THAN ADJACENT FINISH GRADE AS DETAILED.
  - PLANT TREES LARGER THAN 2" CALIPER OR SPECIMEN CLUMPS PRIOR TO INSTALLATION OF IRRIGATION MAINLINES OR LATERALS.
  - IRRIGATION SYSTEM TO BE FULLY OPERATIONAL PRIOR TO PLANTING INSTALLATION, EXCEPT PER NOTE #6.
  - TREES AND SHRUBS SHALL BE INSTALLED PRIOR TO GROUNDCOVERS.
  - PLANTING AREAS TO BE CROWNED IN THE CENTER AT 1/4-INCH PER FOOT FROM THE EDGE UNLESS OTHERWISE NOTED. GRADES SHALL FLOW SMOOTHLY INTO ONE ANOTHER AND PRODUCE POSITIVE DRAINAGE. SLOPE ALL BEDS AWAY FROM BUILDING WALLS UNLESS OTHERWISE INDICATED.
  - CONTRACTOR SHALL ALLOW FOR THE ADDITION OF THE SPECIFIED QUANTITIES OF SOIL AMENDMENTS AND CONDITIONERS IN SOIL PREPARATION AND FINISH GRADING.
  - ALL PLANTS SHALL BE SPOTTED BY THE LANDSCAPE ARCHITECT AT THE TIME OF INSTALLATION.
  - LANDSCAPE ARCHITECT RESERVES THE RIGHT TO ADJUST THE LOCATION OF PLANT MATERIAL DURING INSTALLATION AS APPROPRIATE TO THE PROJECT. ADJUSTMENTS IN LOCATION IN THESE AREAS SHALL BE FIELD SPOTTED BY LANDSCAPE ARCHITECT.
  - REFER TO SHEET L510 FOR PLANTING DETAILS.

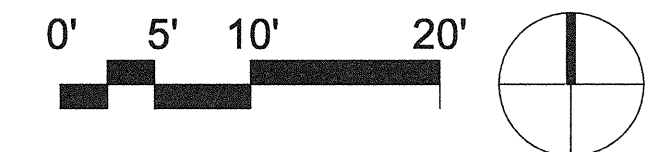

GIFFIN • BOLTE • JURGENS p.c.  
A R C H I T E C T S

815 S.W. SECOND AVENUE • PORTLAND, OREGON 97204  
(503) 223-0992 www.gbjarch.com FAX (503) 294-3961

SiteWorkshop  
LANDSCAPE ARCHITECTURE  
1927 Post Alley  
Seattle, Washington 98101  
206.385.3026  
206.385.3629 fax  
www.siteworkshop.net

MultiCare

EMERGENCY DEPARTMENT & CANCER CENTER EXPANSION

TACOMA, WASHINGTON

Date 09-26-2008  
Scale as shown  
Drawn By BR, CP  
Job No. 4034

PLANTING PLAN  
NORTH

L5  
01