

1

2

3

4

5

6

7

A

B

C

D

E

A

B

C

D

E

## SLAB PLAN NOTES:

- SEE FRAMING PLANS FOR W.W.R. REINF. IN SLAB ON METAL DECK.
- SPLICE ALL #4 & #5 BARS 3'-0" MIN. UNO. LAP LARGER BARS PER GENERAL NOTES.
- ALIGN LOW FLUTES OF METAL DECK TO ALLOW PLACEMENT OF REINF. IN LOW FLUTES.
- SEE APPLICABLE DETAILS FOR ADDITIONAL REINF. @ CLADDING SUPPORTS.

## FIFTH FLOOR SLAB REINFORCING SCHEDULE

MARK	CALLOUT	REMARKS
(A)	(2) #4x15'-0"	● FORMSAVER - SEE 2/54.54 - FOR SIMILAR DETAILS & CALLOUTS IN COMMON SEE 9/54.54
(B)	(2) #6x10'-0"	● FORMSAVER - SEE 2/54.54
(C)	(3) #5 CONT. @ PERIMETER @ 3" O.C.	LAP 3'-6" AS REQ'D LOCATE ONLY WHERE ADD'L SLAB REINF. IS NOT PRESENT

## FIFTH FLOOR SLAB PLAN - NORTH

1/8" = 1'-0"




811 First Avenue, Suite 620  
Seattle, Washington 98104  
tel. 206.255.8000

590 Pacific Avenue, Suite 1100  
Tacoma, Washington 98402  
tel. 253.351.2707

GIFFIN • BOLTE • JURGENS, p.c.  
ARCHITECTS

815 S.W. SECOND AVENUE PORTLAND OREGON 97204  
(503) 223-0992 www.gbjarch.com FAX (503) 294-3961

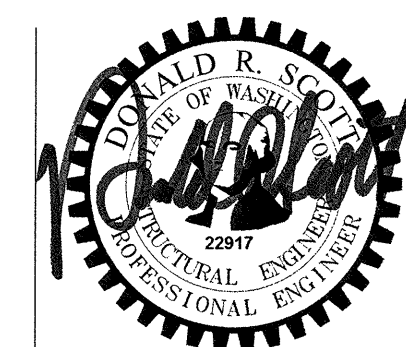

MultiCare

EMERGENCY DEPARTMENT & CANCER CENTER EXPANSION

TACOMA, WASHINGTON

Date 09-26-2008  
Scale 1/8" = 1'-0"  
Drawn By RSC  
Job No. 4034

FIFTH FLOOR SLAB  
PLAN - NORTH

S2  
15s