


N:\B13608\CADD-05\217_E2-18.DWG DEC 18, 2008 - 11:44:59 AM BY: JLD

A
B
C
D
E

GIFFIN • BOLTE • JURGENS
ARCHITECTS

815 S.W. SECOND AVENUE • PORTLAND, OREGON 97204
(503) 223-0992 www.gbjarch.com FAX (503) 294-3961

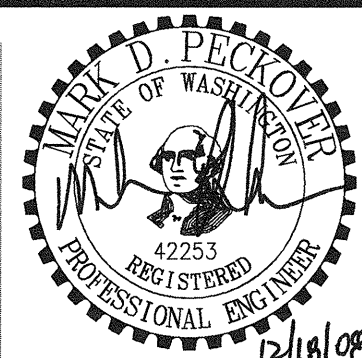

MultiCare
EMERGENCY DEPARTMENT & CANCER CENTER EXPANSION
TACOMA, WASHINGTON

100% CD SET 9/26/08
CCD #4 12/17/08

Date 09-26-2008
Scale AS INDICATED
Drawn By JL
Job No. 4034

PARTIAL
8TH & 9TH FLOOR /
ROOF PLAN NORTH
LIGHTING

E2
18

GENERAL NOTES

- SEE ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT FIXTURE LOCATIONS.
- SEE ARCHITECTURAL ELEVATIONS FOR MOUNTING HEIGHTS FOR WALL MOUNTED FIXTURES.
- COORDINATE FIXTURE LOCATIONS IN AREAS WITH DUCTWORK AND PIPING WITH EXPOSED CEILINGS. ADJUST LOCATIONS AS REQUIRED FOR ACTUAL FIELD CONDITIONS.
- SUPPORT LIGHTS IN ACCORDANCE WITH UBC 1632 AND 1634 SEISMIC ZONE REQUIREMENTS.
- WHERE SWITCHES ARE SHOWN GROUPED, PROVIDE A COMMON BACKBOX WITH BARRIERS AS REQUIRED BY NEC AND COMMON SEAMLESS FACEPLATES.
- IN ROOMS WITH 3-LAMP FIXTURES WHERE DUAL LEVEL SWITCHING IS INDICATED, CIRCUIT FIXTURE SUCH THAT ONE SWITCH CONTROLS THE INNER LAMP AND THE SECOND SWITCH CONTROLS THE OUTER LAMP.
- PROVIDE DIMMING BALLAST(S) FOR FLUORESCENT FIXTURES SHOWN CONNECTED TO A DIMMING SWITCH DAYLIGHT SENSING PHOTOCELL.

FLAG NOTES

- CONNECT COMPLETE TO LIFE SAFETY FIXTURES ON 8TH FLOOR CONNECTED TO PANEL 7H1E CIRCUIT 2,4.

1 PARTIAL EIGHTH FLOOR PLAN - NORTH - LIGHTING
E2.18 SCALE: AS INDICATED

0 4 8 16 24
as indicated feet

2 PARTIAL NINTH FLOOR PLAN - NORTH - LIGHTING
E2.18 SCALE: AS INDICATED

0 4 8 16 24
as indicated feet