


The pages that follow contain a list of spaces and drawings illustrating the relationship between various program areas and the individual spaces within the program area. Additionally, a description of the activities, persons to accommodate, and items to be considered is included.



## Visual Arts

It is the goal of the visual arts program to increase students' skills, knowledge and appreciation of the visual arts. All 3 art labs should allow for multi-use for the visual arts discipline: 3-dimensional, 2-dimensional, and Graphic/Electronic Arts as well as traditional teaching of art appreciation and art history. All spaces should accommodate an "art portrait" area, i.e., photography, creating digital prints, and portfolios. There should be appropriate technology for completing 3-dimensional projects, doing virtual art museum tours and other design work.

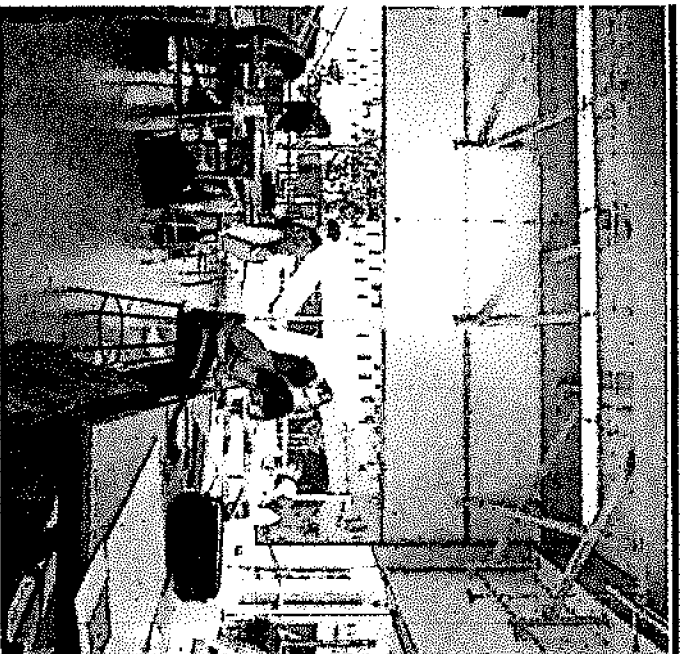

**Visual Arts Space Requirements**

Visual arts spaces will be shared by each learning community. The pages that follow describe in more detail each program area spaces listed in the space requirements table below.

Visual Arts	Suggested			
	TS	Quantity	Sf	Total
Art Lab	2	2	1,300	2,600
Kiln Room		1	100	100
Storage		2	200	400
Office		1	200	200
Digital Art Lab	See Career / Tech Education			
<b>Visual Arts Sub-Total</b>	<b>2</b>			<b>3,300</b>

Plan B: Move to Core Area

**Visual Arts Space Descriptions:**

**Art Labs**

<b>ART LABS</b>	
<b>ACTIVITIES</b>	<b>PERSONS</b>
Drawing	Students
Photography	Teacher
Sculpture	Other staff
Ceramics	
Art appreciation & history	
3-D & 2-D projects	

**ART LABS** **QTY**

<b>MECHANICAL</b>	Ventilation for dust control	Yes
<b>PLUMBING</b>	Large, deep bowled sinks with hot and cold water, with clay traps	6
	Sinks built as island or peninsula - back to back	Yes
	Floor drains with sediment traps	Yes
<b>ELECTRICAL / LIGHTING</b>	Duplex electrical outlets on each wall	Yes
	Adjustable full-spectrum lighting	Yes
	Movable track lighting	Yes
	Electrical service to support art equipment	Yes
	Track lighting for flexibility	Yes
<b>TECHNOLOGY</b>	Telephone/Intercom/Voicemail port	Yes
	Video and data ports	Yes
	Data port for teacher	Yes
	Quad outlets adjacent to each port	Yes
	Ceiling-mounted computer projector with retractable screen	Yes
	Document camera	Yes

# Visual Arts Space Descriptions: Art Labs

ART LABS		QTY
FURNITURE / EQUIPMENT	Casework to include: - Acid and heat resistant countertops with sink, base, and wall cabinets with adjustable shelves - Bookcases with adjustable shelves - Built-in drying rack - Flat drawer storage for paper and multiple drawers for various papers - Tack board between base and wall cabinets - Clay bins with strong built-in counter	Yes
	Work tables with heavy flat surfaces and chairs	Yes
	Potters' wheels for ceramics	Yes
	Computer tables	Yes
	Vertical rolling cart storage built with vertical slots for individual student portfolios	Yes
	Vertical cabinets with pullout bins for individual student supplies or mini lockers	Yes
	Built in vertical slots open in front for canvases	Yes
	Cabinets for storing 3-D work and supplies	Yes
	Printer and table	Yes
	Light tables	Yes
	Scanner	Yes
	Tack boards and tack strips	Yes
	Marker boards	Yes
	Network computers	Yes
DOORS & WINDOWS	Retractable screen	Yes
	Computer projector	Yes
	Double glass doors	Yes
	Windows: operable, with blinds to allow controlled natural lighting	Yes
	Floor to ceiling windows to allow tracing	Yes
	Natural lighting	Yes
	Access to outside	Yes
	Design space for ease in clean-up	Yes
	Floor drains on 1 <sup>st</sup> floor	Yes
	Vinyl flooring	Yes
SPECIAL CONSIDERATIONS	Drapes to darken room	Yes
	Secure display surfaces/areas for exhibiting art in corridors for 2-D & 3-D work	Yes

**Visual Arts Space Descriptions:**  
**Kiln Room**

<b>KILN ROOM</b>	
<b>ACTIVITIES</b>	<b>PERSONS</b>
Store ceramics	Students
Firing of student projects	Teacher
Storage of projects, equipment, and supplies	Aids

<b>KILN ROOM</b>		<b>QTY</b>
<b>MECHANICAL</b>	Adequate ventilation for kiln	Yes
	Air conditioning	Yes
<b>PLUMBING</b>	Sink with hot and cold water	Yes
<b>ELECTRICAL / LIGHTING</b>	Appropriate wiring for Kiln	Yes
	Duplex electrical outlets on each wall	Yes
	See manufacturers requirements for power and venting	Yes
<b>TECHNOLOGY</b>	No special requirements	
<b>FURNITURE / EQUIPMENT</b>	Casework to include:	
	-Adjustable, deep shelving built to ceiling height	Yes
	-File cabinets	
	Storage for wet clay projects (green ware rack)	Yes
	Metal cabinets for storing glaze	Yes
	Shelving for projects	Yes
	Clay bin	Yes
	Kiln with vent	Yes
	Layout of room to maximize storage	Yes
<b>DOORS &amp; WINDOWS</b>	Door: appropriate for high temperature	Yes
	No Windows	
<b>SPECIAL CONSIDERATIONS</b>	Door to include tack board	Yes
	Tile flooring	Yes

**Visual Arts Space Descriptions:**

**Storage**

**STORAGE**

**ACTIVITIES**

Storage of projects, equipment, and supplies

**PERSONS**

Teacher

Students

**STORAGE**

**QTY**

**MECHANICAL**

No special requirements

**PLUMBING**

Sink with hot and cold water

**ELECTRICAL / LIGHTING**

Duplex electrical outlets on each wall

**TECHNOLOGY**

No special requirements

**FURNITURE / EQUIPMENT**

Casework to include:  
- Adjustable, deep shelving built to ceiling height  
- Large, flat paper storage drawers  
- File cabinets  
- Cabinets with pullout bins for supplies  
- Tall center table for paper cutter

**DOORS & WINDOWS**

Door: view panel  
No Windows

**SPECIAL CONSIDERATIONS**

Door to include tack board  
Tile flooring

Visual Arts Space Descriptions:

Office

OFFICE

ACTIVITIES

PERSONS

Teacher preparation

Teacher

OFFICE

QTY

MECHANICAL

Quiet air conditioning

Yes

PLUMBING

No special requirements

ELECTRICAL / LIGHTING

Duplex electrical outlets on each wall  
Quad outlet at each data port

Yes  
Yes

TECHNOLOGY

Telephone/intercom/voicemail port  
Video and data ports  
Duplex outlet  
Quad outlet @ each data port  
Intercom

Yes  
Yes  
Yes  
Yes  
Yes

FURNITURE / EQUIPMENT

Flexible surfaces  
Legal size file lateral drawer  
6 data drops with double, triple, or quad Communications Network Outlets  
Desk chair  
Guest chairs  
Lamps  
Bookshelves  
Marker board  
Laptop computer  
Printer  
Locking file cabinet, 4 drawer  
Bulletin board  
Clock

Yes  
Yes  
1  
1  
2  
Yes  
18LF  
4LF  
1  
1  
1 to 2  
4LF  
1

DOORS & WINDOWS

Door: view panel

Yes

SPECIAL CONSIDERATIONS

Bright, soft lighting

Yes



### **Music/Performing Arts**

It is the goal of the music program to increase students' knowledge and appreciation of music and the performing arts.

The pages that follow contain a list of spaces and drawings illustrating the relationship between various program areas and the individual spaces within the program area. Additionally, a description of the activities, persons to accommodate, and items to be considered is included.

An important consideration for all music and performing arts spaces is flat flooring without steps, to ease transitions and movement of instruments scenery in and out of the building.





## Music / Performing Arts Space Requirements

Music / Performing Arts	Suggested			
	TS	Quantity	SF	Total
Choral Room	1	1	1,600	1,600
Storage (Robes, Music)		1	500	500
Band Room	1	1	2,300	2,300
Band Storage (Instruments, Music)		1	500	500
Practice rooms		4	50	200
Restrooms		2	50	100
Offices		4	150	600
Drama Classroom	1	1	1,600	1,600
Dance Classroom	1	1	1,600	1,600
<b>Music/ Performing Arts Sub-Total</b>	<b>4</b>			<b>9,000</b>

Locally Funded Initiative [without State support]	TS	Quantity	SF	Total
Auditorium Seating (800 seats)		1	7,200	7,200
Control Booth		1	200	200
Auditorium Stage		1	3,500	3,500
Scene Shop		1	1,200	1,200
Make Up/Dressing		2	300	600
Storage (Costumes, Props)		1	500	500
<b>Locally Funded Initiative Sub-total</b>				<b>13,200</b>

Note: PSFA does not fund auditoriums



**Music / Performing Arts Space Descriptions:**  
**Choral Room**

<b>CHORAL ROOM</b>	
<b>ACTIVITIES</b>	<b>PERSONS</b>
Rehearsals	Students
Gathering performance area	Teachers
Rectals	Parents
Meeting area for school and community	Volunteers
Instruction	Other staff
Recording of performances	Community

<b>CHORAL ROOM</b>		<b>QTY</b>
<b>MECHANICAL</b>	Quiet HVAC system [noise from mechanical equipment should not be audible in classroom]	Yes
	Climate controlled	Yes
<b>PLUMBING</b>	Sink with hot and cold water	Yes
<b>ELECTRICAL / LIGHTING</b>	Duplex electrical outlets on each wall	Yes
	Video and data ports	Yes
	Telephone/Intercom/voicemail port	Yes
	Data port for teacher	Yes
	Quad outlet adjacent to each data port	Yes
	Ceiling-mounted computer projector with retractable screen	Yes
	Sound system w/microphones, amplifier, mixer, MIDI, speaker for recording and playing back student rehearsals, performances	Yes
	Ceiling-mounted recording microphones	Yes
<b>TECHNOLOGY</b>		

Music / Performing Arts Space Descriptions:

Choral Room

CHORAL ROOM

		QTY
FURNITURE / EQUIPMENT	Casework to include: - Countertops with sink, base, and wall cabinets - 4 tall storage cabinets with shelving, drawers, and lockable doors - Adjustable height bookshelves - Wardrobe cabinets - Music storage cabinets, lockable	Yes
	Musician ergonomic chairs and stands	Yes
	Portable music stand storage	Yes
	Conductor's chair, podium, and stand	Yes
	Desk and chair	Yes
	Portable risers and guard rails	Yes
	Electronic keyboard and upright piano	Yes
	CD/DVD player/burner, tape player, and video camera	Yes
	Networked computers	Yes
	Magnetic marker board with music staff on one section	Yes
	Tack boards and strips	Yes
	Instrument storage cabinets	Yes
	Keyboard lab tables	Yes
	Moveable teaching cart [portable]	Yes
	Microphones & speakers	Yes
DOORS & WINDOWS	Metronome	Yes
	Teacher amplification system	Yes
SPECIAL CONSIDERATIONS	Digital recording system	Yes
	Door: double doors that lead onto stage	Yes
	Windows: operable, with blinds to allow for controlled lighting	Yes
	Appropriate acoustical treatment	Yes
	High ceilings	Yes
	Direct access to stage from music room [if possible]	Yes
		Yes

**Music / Performing Arts Space Descriptions:**  
**Storage (Robes, Music)**

**STORAGE (ROBES, MUSIC)**

ACTIVITIES		PERSONS	
Storage of: textbooks instruments choir robes supplies equipment		Teacher	
		Students	

**STORAGE (ROBES, MUSIC)** **QTY**

<b>MECHANICAL</b>	No special requirements	
<b>PLUMBING</b>	No special requirements	
<b>ELECTRICAL / LIGHTING</b>	At least 2 duplex electrical outlet on each wall	Yes
<b>TECHNOLOGY</b>	No special requirements	
<b>FURNITURE / EQUIPMENT</b>	Mobile Casework to include: - Heavy duty, adjustable shelving on 2 walls - Filing cabinets	Yes
	Closets for choir robes and band uniforms	Yes
	Music folio cabinet, one per performing group or period	Yes
	Instrument storage shelving	Yes
	Storage cart for sound system	Yes
	Moveable teaching cart [portable]	Yes
<b>DOORS &amp; WINDOWS</b>	Door: view panel	Yes
	Windows: no special requirements	Yes
<b>SPECIAL CONSIDERATIONS</b>	2 Story - possibly in the mezzanine of the auditorium Security and visibility	Yes Yes



**Music / Performing Arts Space Descriptions:**  
**Band Room**

<b>BAND ROOM</b>	
<b>ACTIVITIES</b>	<b>PERSONS</b>
Rehearsals	Students
Gathering performance area	Teachers
Recitals	Parents
Meeting area for school and community	Volunteers
Instruction	Other staff
Recording	Community

<b>BAND ROOM</b>		<b>QTY</b>
<b>MECHANICAL</b>	Quiet HVAC system [noise from mechanical equipment should not be audible in classroom]	Yes
	Climate controlled	Yes
<b>PLUMBING</b>	Sink with hot and cold water	Yes
<b>ELECTRICAL / LIGHTING</b>	Duplex electrical outlets on each wall	Yes
<b>TECHNOLOGY</b>	Video and data ports	Yes
	Telephone/intercom/voicemail port	Yes
	Data port for teacher	Yes
	Quad outlet adjacent to each data port	Yes
	Ceiling-mounted computer projector with retractable screen	Yes
	Sound system w/microphones, amplifier, mixer, MIDI, speaker for recording and playing back student rehearsals, performances	Yes
	Ceiling-mounted recording microphones	Yes
	Document camera	Yes
	Interactive whiteboard	Yes



**Music / Performing Arts Space Descriptions:**

**Band Room**

<b>BAND ROOM</b>		<b>QTY</b>
<b>FURNITURE / EQUIPMENT</b>	Casework to include: - Countertops with sink, base, and wall cabinets - 4 tall storage cabinets with shelving, drawers, and lockable doors - Adjustable height bookshelves - Wardrobe cabinets - Music storage cabinets, lockable	Yes
	Musician ergonomic chairs and stands	Yes
	Conductor's chair, podium, and stand	Yes
	Printer and printer table	Yes
	Desk and chair [foldable]	Yes
	Portable risers and guard rails	Yes
	Electronic keyboard [MIDI compatible]	Yes
	CD/DVD player/burner, tape player, and video camera	Yes
	Networked computers	Yes
	Magnetic marker board with music staff on one section	Yes
	Tack boards and strips	Yes
	Instrument storage cabinets	Yes
	Keyboard and MIDI workstations	Yes
	Moveable teaching cart [portable]	Yes
	Microphones & speakers	Yes
	Metronome	Yes
	Teacher amplification system	Yes
	Digital recording system	Yes
	Keyboard stands and cases	Yes
<b>DOORS &amp; WINDOWS</b>	Door: double doors that lead onto stage, no center bar	Yes
	Exterior double doors with no center bar	Yes
	Windows: operable, with blinds to allow for controlled lighting	Yes
<b>SPECIAL CONSIDERATIONS</b>	Appropriate acoustical treatment	Yes
	Direct access to stage from music room [if possible]	Yes
	High ceilings	Yes
	STET software	Yes
	Brass water valves	Yes



**Music / Performing Arts Space Descriptions:**

**Band Storage (Instruments, Music)**

**BAND STORAGE (INSTRUMENTS, MUSIC)**

ACTIVITIES		PERSONS	
Storage of: textbooks instruments supplies band uniforms equipment		Teacher	
		Students	

BAND STORAGE (INSTRUMENTS, MUSIC)			QTY
MECHANICAL	No special requirements		
PLUMBING	No special requirements		
ELECTRICAL / LIGHTING	At least 2 duplex electrical outlets on each wall		Yes
TECHNOLOGY	No special requirements		
FURNITURE / EQUIPMENT	Mobile Casework to include: - Heavy duty, adjustable shelving on 2 walls - Filing cabinets		Yes
	Music folio cabinet, one per performing group or period		Yes
	Instrument storage shelving		Yes
	Storage cart for sound system		Yes
	Moveable teaching cart [portable]		Yes
	Microphones & speakers		Yes
	Metronome		Yes
	Teacher amplification system		Yes
	Digital recording system, updated as technology improves		Yes
DOORS & WINDOWS	Door: view panel		Yes
SPECIAL CONSIDERATIONS	Shelving to optimize storage		Yes
	Hanging rods for uniforms		Yes
	Security and visibility		Yes



**Music / Performing Arts Space Descriptions:**  
Practice Rooms

PRACTICE ROOMS	
ACTIVITIES	PERSONS
Provides an exclusive area for student musical practice and one-on-one instruction	Students
Recording performances	Teachers
PRACTICE ROOMS	
	QTY
MECHANICAL	No special requirements
PLUMBING	Drinking fountain near vocal practice rooms
ELECTRICAL / LIGHTING	Duplex electrical outlet
	Quad outlet adjacent to each data port
TECHNOLOGY	No special requirements
FURNITURE / EQUIPMENT	Chairs
	Music stands
	Mirror
	Acoustic tiling
DOORS & WINDOWS	Door: secure, sound proof, with view panel
	Window: secure, sound proof
SPECIAL CONSIDERATIONS	Sound proof walls
	Adjacent to music room and instrument storage
	Visibility from music room/band room
	Carpet flooring





**Music / Performing Arts Space Descriptions:**

Restrooms

**RESTROOMS**

**ACTIVITIES**

**PERSONS**

Personal hygiene

Students

**RESTROOMS**

**QTY**

<b>MECHANICAL</b>	Exhaust fan	1
	Intake and outtake ventilation	1
<b>PLUMBING</b>	Sinks with hot and cold water	2
<b>ELECTRICAL / LIGHTING</b>	Duplex outlets on each wall	4
<b>TECHNOLOGY</b>	No special requirements	
<b>FURNITURE / EQUIPMENT</b>	Casework to include cabinet with mirror	1
	Biohazard disposal can	1
<b>DOORS &amp; WINDOWS</b>	Solid doors	1
<b>SPECIAL CONSIDERATIONS</b>	Separate from dressing room	Yes

**Program Area Descriptions**  
**High School Educational Specifications**

**Locally Funded Initiative [without State support]**  
**Music / Performing Arts Space Descriptions:**  
**Auditorium Seating**

<b>AUDITORIUM SEATING</b>	
<b>ACTIVITIES</b>	<b>PERSONS</b>
Student performances	Staff members
School and community program, meetings, and activities	Community -- primarily after school hours
Faculty meetings	Students
Class instruction	

<b>AUDITORIUM SEATING</b>		<b>QTY</b>
<b>MECHANICAL</b>	Quiet separate zone	Yes
	No special requirements	
<b>PLUMBING</b>	Duplex electrical outlets on each wall	Yes
	Variable lighting levels	Yes
	Theater lighting	Yes
	Telephone/intercom/voicemail port	Yes
<b>ELECTRICAL / LIGHTING</b>	Video and data ports	Yes
	Quad outlet adjacent to each data port	Yes
	Audio enhancement system	Yes
	Sound system with portable or wireless microphones	Yes
<b>TECHNOLOGY</b>	CD/DVD player	Yes
	Equipment rack in control closet	Yes
	Computer projector	Yes
	Large, retractable projection screen	Yes
<b>FURNITURE / EQUIPMENT</b>	Overhead doors	Yes
	Door: double doors with access to outside courtyard/dining area	Yes
	Windows: None	Yes
	Good sight lines to all areas of the room for supervision	Yes
<b>DOORS &amp; WINDOWS</b>	Acoustic sound panels	Yes
	Wing space	Yes
	Fly system	Yes
	Control closet with light and sound control box	Yes
	Sloped floor	Yes
	Fixed seats	Yes
	First several rows of seats removable to create orchestra space or orchestra pit	Yes
<b>SPECIAL CONSIDERATIONS</b>		



**Locally Funded Initiative [without State support]**

**Music / Performing Arts Space Descriptions:**

**Control Booth**

CONTROL BOOTH	
ACTIVITIES	PERSONS
Control of audio and lighting systems of Auditorium	Students
	Teachers

CONTROL BOOTH		QTY
MECHANICAL	No special requirements	
PLUMBING	No special requirements	
ELECTRICAL / LIGHTING	Overhead lighting [dimnable]	Yes
	Multiple duplex outlets above work counter	Yes
	Coordinate power requirements with lighting and sound	Yes
TECHNOLOGY	Intercom	Yes
	Wireless headset communication to Stage	Yes
	Plug-ins for lighting and sound boards	Yes
FURNITURE / EQUIPMENT	Built-in work counter	Yes
	Adjustable height swivel stools	Yes
DOORS & WINDOWS	Door: secure with small view panel	Yes
	Windows: sliding glass window to Auditorium	Yes
SPECIAL CONSIDERATIONS	Acoustical ceiling	Yes
	Dark colored walls	Yes



**Locally Funded Initiative [without State support]**  
**Music / Performing Arts Space Descriptions:**  
**Auditorium Stage**

AUDITORIUM STAGE		
ACTIVITIES	PERSONS	
Provides multi-function place for student and community performances	Students	
Musical and dramatic performances and rehearsals	Teachers	
Student assemblies	Staff	
Awards programs	Parents	
Presentations	Community members	
Guest speakers		
Community meetings		
Large group instruction		

AUDITORIUM STAGE			QTY
MECHANICAL	No special requirements		
PLUMBING	Fire sprinkler is under stage if storage in under stage		Yes
ELECTRICAL / LIGHTING	Duplex electrical outlets		Yes
	Stage lighting		Yes
	Quad outlets adjacent to each data port		Yes
	Audio ports		Yes
TECHNOLOGY	Voice port/phone		Yes
	Data ports and access to wireless network		Yes

**Locally Funded Initiative [without State support]**  
**Music / Performing Arts Space Descriptions:**

**Auditorium Stage**

**AUDITORIUM STAGE**

		QTY
FURNITURE / EQUIPMENT	Upright piano	Yes
	Microphones	Yes
	Curtain	Yes
	Side curtains	Yes
	Pit cover [if there is an orchestra pit]	Yes
	Acoustic music shell and portable risers [instrumental and choral]	Yes
	Back drop screen	Yes
	Video production/projection screen	Yes
DOORS & WINDOWS		Yes
SPECIAL CONSIDERATIONS	Large overhead door from stage to scene shop	Yes
	Adjacent to auditorium and along edge that allow for the best sight lines of spectators to platforms	Yes
	Wing space - Minimum 10' on each side	Yes
	Wood flooring, also conducive for dance programs	Yes
	Adjacent to or in close proximity to music room and art room and drama room	Yes
	Pulleys and rigging for backdrop scenery	Yes
	Full fly space (Minimum 40' clearance)	Yes
	Storage area under stage	Yes
	Handicap access for raised stage	Yes



**Locally Funded Initiative [without State support]**  
**Music / Performing Arts Space Descriptions:**  
**Scene Shop**

SCENE SHOP	
ACTIVITIES	PERSONS
Preparation of props and scenery for use on Stage such as carpentry and painting	Students
	Teachers

SCENE SHOP		QTY
MECHANICAL	No special requirements	
PLUMBING	Sink with hot and cold water	Yes
ELECTRICAL / LIGHTING	Duplex outlets at 5' OC	Yes
	Uniform fluorescent lighting	Yes
TECHNOLOGY	Intercom	Yes
	Voice, video, and data ports	Yes
	2' deep storage racks for tools and props	Yes
	Flammable materials storage cabinets	Yes
	Work benches	Yes
	Power tools	Yes
FURNITURE / EQUIPMENT	Adjustable height stools	Yes
	Racks for storing backdrops	Yes
	Woodworking equipment	Yes
	Painting equipment	Yes
	Large overhead door to outside dock	Yes
DOORS & WINDOWS	Large overhead door to stage	Yes
	Ventilation	Yes
SPECIAL CONSIDERATIONS	Recessed flooring	Yes
	Sealed concrete floor	Yes
	Paint rack area at one wall	Yes
	Adjacent to Stage	Yes

*Locally Funded Initiative [without State support]*  
Music / Performing Arts Space Descriptions:  
Make-up / Dressing

MAKE-UP / DRESSING	
ACTIVITIES	PERSONS
Preparation of make-up and costumes for performances	Students
	Teachers
	Community members
	Staff

MAKE-UP / DRESSING		QTY
MECHANICAL	No special requirements	
PLUMBING	Sinks with hot and cold water	Yes
ELECTRICAL / LIGHTING	Make-up lighting at mirrors	Yes
TECHNOLOGY	Intercom Voice and data ports	Yes Yes
FURNITURE / EQUIPMENT	Make-up counter with adjustable height chairs Mirrors with lighting above and adjacent	Yes Yes
DOORS & WINDOWS	Solid doors	Yes
SPECIAL CONSIDERATIONS	Privacy and security	Yes



**Locally Funded Initiative [without State support]**  
**Music / Performing Arts Space Descriptions:**  
**Storage (Costumes, Props)**

STORAGE (COSTUMES, PROPS)	
ACTIVITIES	PERSONS
Storage for equipment, materials, props, and costumes	Students
	Teachers
	Staff
	Community members
	Parents

STORAGE (COSTUMES, PROPS)		QTY
MECHANICAL	No special requirements	
PLUMBING	No special requirements	
ELECTRICAL / LIGHTING	Duplex electrical outlet	Yes
	Quad outlet adjacent to each data port	Yes
TECHNOLOGY	No special requirements	Yes
FURNITURE / EQUIPMENT	Closet rods	Yes
DOORS & WINDOWS	Doors: double doors to Stage	Yes
SPECIAL CONSIDERATIONS	Adjacent to stage	Yes
	2 Story - possibly in the mezzanine of the auditorium	Yes
	Large door opening	Yes



**Music / Performing Arts Space Descriptions:**  
**Offices**

<b>OFFICES</b>	
<b>ACTIVITIES</b>	<b>PERSONS</b>
Meeting with students	School staff
Teacher class preparation	Teachers
	Students

<b>OFFICES</b>		<b>QTY</b>
<b>MECHANICAL</b>	Air conditioning	Yes
<b>PLUMBING</b>	No special requirements	
<b>ELECTRICAL / LIGHTING</b>	Duplex electrical outlets on each wall	Yes
	Quad outlet at each data port	1
<b>TECHNOLOGY</b>	Telephone/intercom/voicemail port	Yes
	Video and data ports	Yes
	Quad outlet adjacent to each data port	Yes
	Telephone	1
	Intercom	Yes
<b>FURNITURE / EQUIPMENT</b>	Locking file cabinet, 4 drawer	1 to 2
	Clock	1
	File lateral drawer	Yes
	Desk	1
	Desk chair	1
	Guest chairs	2
	Lamps	Yes
	Bookshelves	18LF
	Marker board	4LF
	Laptop computer	1
	Printer	1
<b>DOORS &amp; WINDOWS</b>	Door: view panel	Yes
	Windows: no special considerations	Yes
<b>SPECIAL CONSIDERATIONS</b>	Bright, soft lighting	Yes
	Tile	Yes



**Music / Performing Arts Space Descriptions:**

**Drama Classroom**

**DRAMA CLASSROOM**

<b>ACTIVITIES</b>		<b>PERSONS</b>	
Production		Teacher	
Meetings		Students	
Instruction			
Script writing			
Small scene work			

**DRAMA CLASSROOM**

		<b>QTY</b>	
<b>MECHANICAL</b>	No special requirements		
<b>PLUMBING</b>	No special requirements		
<b>ELECTRICAL / LIGHTING</b>	With light grid		Yes
	Duplex electrical outlets on each wall		Yes
	Overhead lighting		Yes
<b>TECHNOLOGY</b>	Telephone / intercom / voicemail port		Yes
	Data ports		Yes
<b>FURNITURE / EQUIPMENT</b>	Movable auditorium-like seating		Yes
<b>DOORS &amp; WINDOWS</b>	Doors with view panel		Yes
	Windows: operable with blinds to allow for controlled natural lighting		Yes
<b>SPECIAL CONSIDERATIONS</b>	Access to storage		Yes
	Movable stage		Yes



**Music / Performing Arts Space Descriptions:**

Dance Classroom

DANCE CLASSROOM	
ACTIVITIES	PERSONS
Dance Class	Teacher
Rehearsal space	Students
Independent dance development	Community

DANCE CLASSROOM		QTY
MECHANICAL	Additional ventilation	Yes
PLUMBING	Recessed drinking fountains	Yes
ELECTRICAL / LIGHTING	Lighting which does not add heat	Yes
	Uniform lighting	Yes
	Telephone/intercom/voicemail port	Yes
TECHNOLOGY	Video port and data ports	Yes
	Quad outlet adjacent to each data port	Yes
	Audio enhancement system	Yes
	Sound system	Yes
FURNITURE / EQUIPMENT	Wall of mirrors	Yes
	Floor to ceiling mirrors on one long wall	Yes
DOORS & WINDOWS	Large doors with view panel	Yes
	No windows	Yes
SPECIAL CONSIDERATIONS	Ballet bars	Yes
	Dance floor	Yes

