

DOOR SCHEDULE

SYMBOL	SIZE	THK	HANDING	DOOR			TYPE	GLASS	REMARKS
				MATERIAL	DOOR FUNCTION	TYPE			
UNIT DOORS									
1	3035	134"	SINGLE	FG	6 PANEL	A	WD	R-1	ENTRY 3 RD FLOOR BLDG C & D
2	2265	136"	SINGLE	HO	6 PANEL	B	MOF	R-2	
3	2265	136"	SINGLE	HO	6 PANEL	B	MOF	R-3	
4	2265	136"	SINGLE	HO	6 PANEL	B	MOF	R-3	
5	2465	136"	SINGLE	HO	6 PANEL	B	MOF	R-4	
6	2035	136"	SINGLE	HO	6 PANEL	B	MOF	R-5	
7	1835	136"	SINGLE	HO	6 PANEL	B	MOF	R-5	
8	2225	136"	PAN	HO	6 PANEL	B	MOF	R-4	
9	2265	136"	SINGLE	HO/METALMO	FLUSH	G	MOF	R-2	
10	2358	136"	SINGLE	HO/METALMO	FLUSH	G	MOF	R-2	
11	3035	134"	BRASS	METAL	WARDROBE	E	BRP MOF	R-9	TEMP. ENTRY 3 RD FLOOR BLDG A & B ENTRY UPPER FLOOR
12	3035	134"	SINGLE	FG	6 PANEL	A	WD	R-3	
13	3065	134"	SINGLE	FG	6 PANEL	D	WD	R-7	
14	2265	136"	SINGLE	HO	6 PANEL	G	WD	R-4	
15	2265	136"	SINGLE	HO/METALMO	FLUSH	B	MOF	R-1	
16	2895	136"	SINGLE	LVR	LVR	J	WD	R-2	
17	3065	134"	SINGLE	HM	FLUSH	H	HM	R-3	
18	2358	134"	PAN	HM	FLUSH	H	HM	R-1	
19	6035	--	SLDNG	WML	1 LITE	I	WML	R-9	TEMP.
20	4035	--	SINGLE	TUBE STEEL	SPACED TUBING	MIN	--	R-2	
21	2225	136"	PAN	LVR/LVR	LVR	J	MOF	R-1	
22	2035	136"	SINGLE	LVR	LVR	H	MOF	R-2	

 $\alpha = 0.05$

- [illegible]

License Stamp

KTGY GROUP, INC.

17992 MITCHELL SOUTH
IRVINE CA 92614

(949) 851-2133
(949) 851-5156 FAX

Principal in Charge ,	D. McALLISTER
Project Director ,	D. McALLISTER
Project Manager ,	W. WONG
Project Designer ,	D. TAITANO
Checked By ,	

**FINISH SCHEDULE/
DOOR SCHEDULE**

Sheet No.

75

CAD FILE: 02681
NOT DATE:
K:\ITG\YSOCAL\1077UCLIP\PRODUCTION\1077FS1.DWG, Layout1, 11/06/2002 09:28:00


[illegible]

Consultant's

Project :

UCI - EAST CAMPUS
STUDENT APTS.
PHASE I
IRVINE
CALIFORNIA

2001077

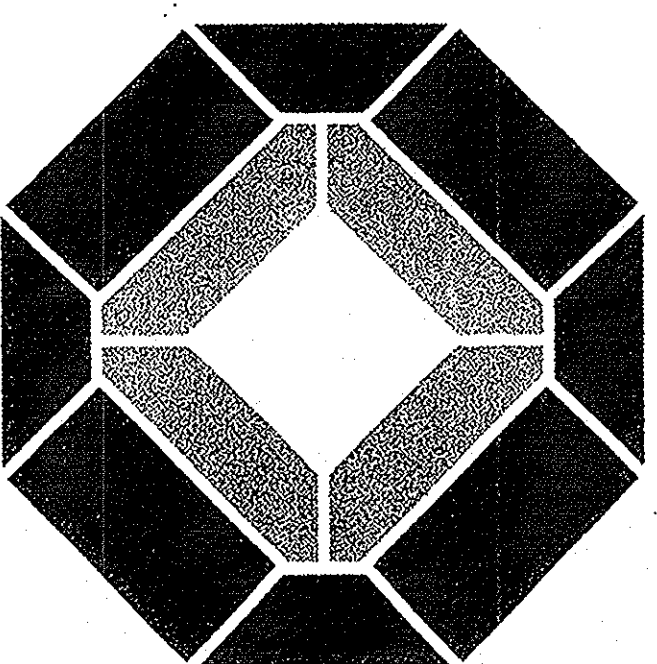

(949) 851-2133
(949) 851-5156 FAX

Stamp.

CONTRACT SET

Sheet No.