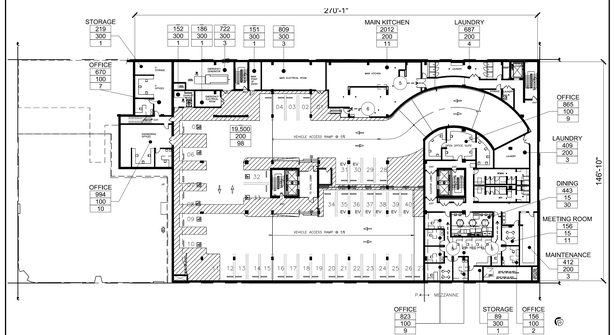

MAX TRAVEL DISTANCE FROM ANY POINT: 55'-0"
MAX PERMITTED TRAVEL DISTANCE: 300'
FULLY SPRINKLERED STRUCTURE

P-1 PARKING FLOOR PLAN

BACK-OF-HOUSE AREA
TOTAL OCCUPANTS: 95/ 2 STAIRS = 48 OCCUPANTS/ STAIR
REQUIRED STAIR WIDTH: 48 X .3 = 14.4"/ STAIR
PROVIDED STAIR WIDTH: 48"/ STAIR
REQUIRED EXIT DOOR WITH : 48 X .02= 10"/ DOOR
PROVIDED NOMINAL EXIT DOOR WIDTH: 36"/ DOOR
PARKNIG AREA
TOTAL OCCUPANTS: 100/ 3 STAIRS = 33 OCCUPANTS/ STAIR
REQUIRED STAIR WIDTH: 33 X .3 = 9.9"/ STAIR
PROVIDED STAIR WIDTH: 48"/ STAIR
REQUIRED EXIT DOOR WITH : 33 X .02= 6.6"/ DOOR
PROVIDED NOMINAL EXIT DOOR WIDTH: 36"/ DOOR

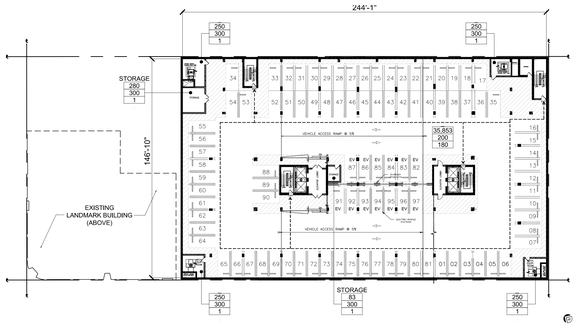

MAX TRAVEL DISTANCE FROM ANY POINT: 55'-0"
MAX PERMITTED TRAVEL DISTANCE: 300'
FULLY SPRINKLERED STRUCTURE

P-3 PARKING FLOOR PLAN
OCCUPANCY: S2 - GROSS AREA: 35,853 S.F.
TOTAL OCCUPANTS: 180 FOR 4 STAIRS = 45 PERSONS PER STAIR
REQUIRED STAIR WIDTH: 45 x 0.3 = 13.5"
PROVIDED STAIR WIDTH: 48"
REQUIRED EXIT DOOR WIDTH: 45 x 0.2 = 9"
PROVIDED NOMINAL EXIT DOOR WIDTH: 36"

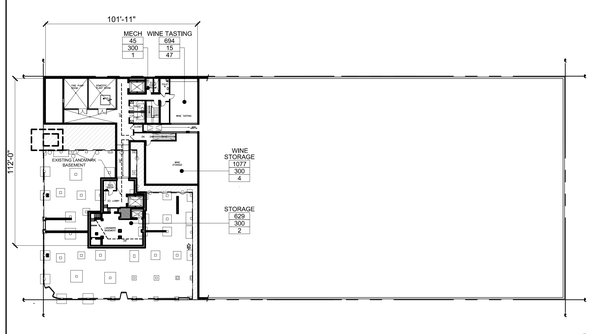

MAX TRAVEL DISTANCE FROM ANY POINT: 30'-0"
MAX PERMITTED TRAVEL DISTANCE: 300'
FULLY SPRINKLERED STRUCTURE

BASEMENT FLOOR PLAN
OCCUPANCY: S-2 & B - GROSS AREA: 4,891 S.F.
TOTAL OCCUPANTS: 25 : 2 STAIRS = 13 OCCUPANT /STAIR
REQUIRED STAIR WIDTH: 13 x 0.3 = 3.9"
PROVIDED STAIR WIDTH: 48"
REQUIRED EXIT DOOR WIDTH: 13 x 0.2 = 2.6"
PROVIDED NOMINAL EXIT DOOR WIDTH: 36"

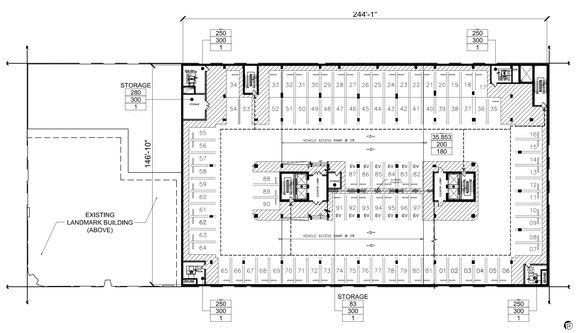

MAX TRAVEL DISTANCE FROM ANY POINT: 55'-0"
MAX PERMITTED TRAVEL DISTANCE: 300'
FULLY SPRINKLERED STRUCTURE

P-2 PARKING FLOOR PLAN
OCCUPANCY: S2 - GROSS AREA: 35,853 S.F.
TOTAL OCCUPANTS: 180 FOR 4 STAIRS = 45 PERSONS PER STAIR
REQUIRED STAIR WIDTH: 45 x 0.3 = 13.5"
PROVIDED STAIR WIDTH: 48"
REQUIRED EXIT DOOR WIDTH: 45 x 0.2 = 9"
PROVIDED NOMINAL EXIT DOOR WIDTH: 36"

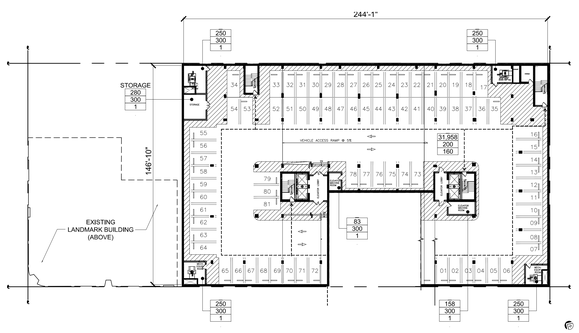

MAX TRAVEL DISTANCE FROM ANY POINT: 55'-0"
MAX PERMITTED TRAVEL DISTANCE: 300'
FULLY SPRINKLERED STRUCTURE

P-4 PARKING FLOOR PLAN
OCCUPANCY: S2 - GROSS AREA: 31,958 S.F.
TOTAL OCCUPANTS: 160 FOR 4 STAIRS = 40 PERSONS PER STAIR
REQUIRED STAIR WIDTH: 40 x 0.3 = 12"
PROVIDED STAIR WIDTH: 48"
REQUIRED EXIT DOOR WIDTH: 40 x 0.2 = 8"
PROVIDED NOMINAL EXIT DOOR WIDTH: 36"

REVISIONS

BY	DATE	DESCRIPTION
-	06/07/2013	Milestone 02
-	06/24/2013	Milestone 03
-	08/26/2013	Milestone 04
-	09/27/2013	Milestone 05

hla
howard laks architects
1545 twelfth street
santa monica, ca 90401
voice : 310-393-4455
fax : 310-393-2230

CONSULTANTS

710 WILSHIRE BOULEVARD

MIXED-USE HOTEL PROJECT
SANTA MONICA - CALIFORNIA 90401

PARKING EGRESS DIAGRAMS

DRAWN AJH/SC
CHECKED HLA
APPROVED –
SCALE NTS
SHEET A-005
DATE June 25, 2013
PROJECT NUMBER HLA 0000000-00000