
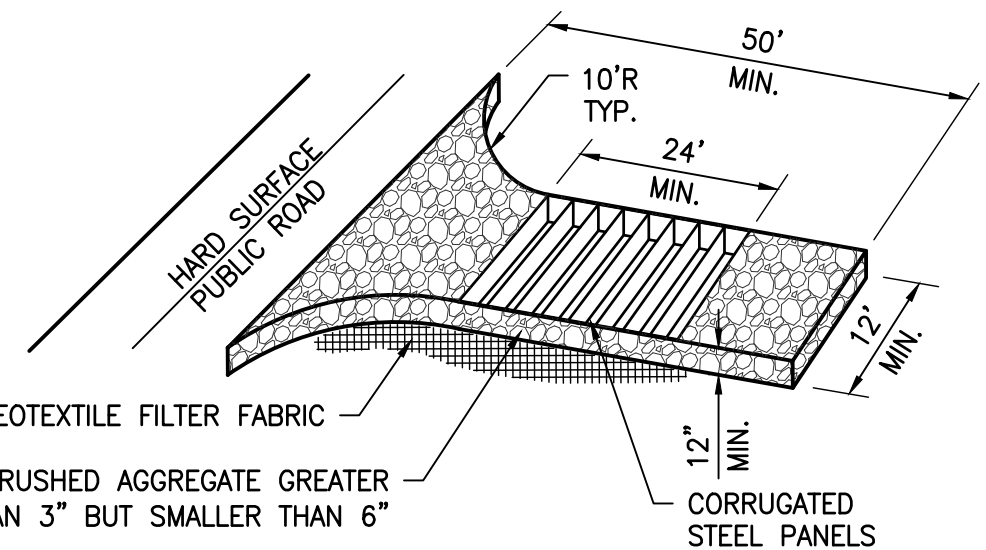
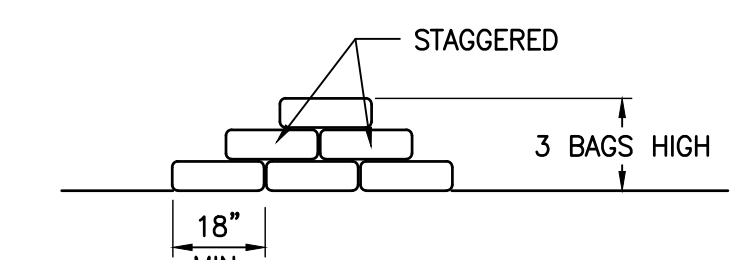
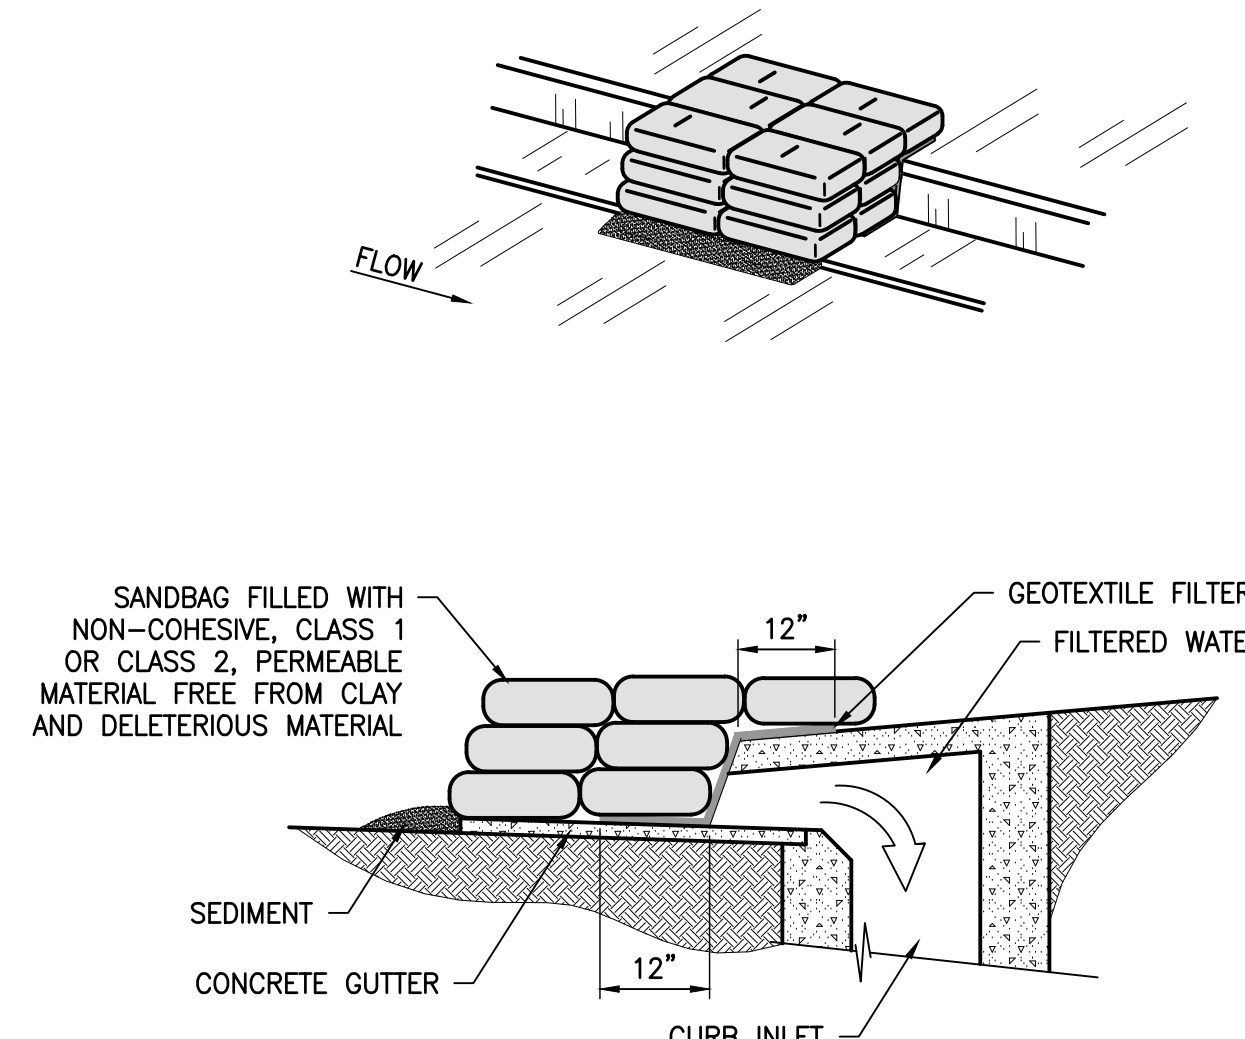


P:\2010\110229 710 Wilshire Hotel\DWG\SHEET\110229 C-110E.C.dwg May 26, 2016 3:05pm

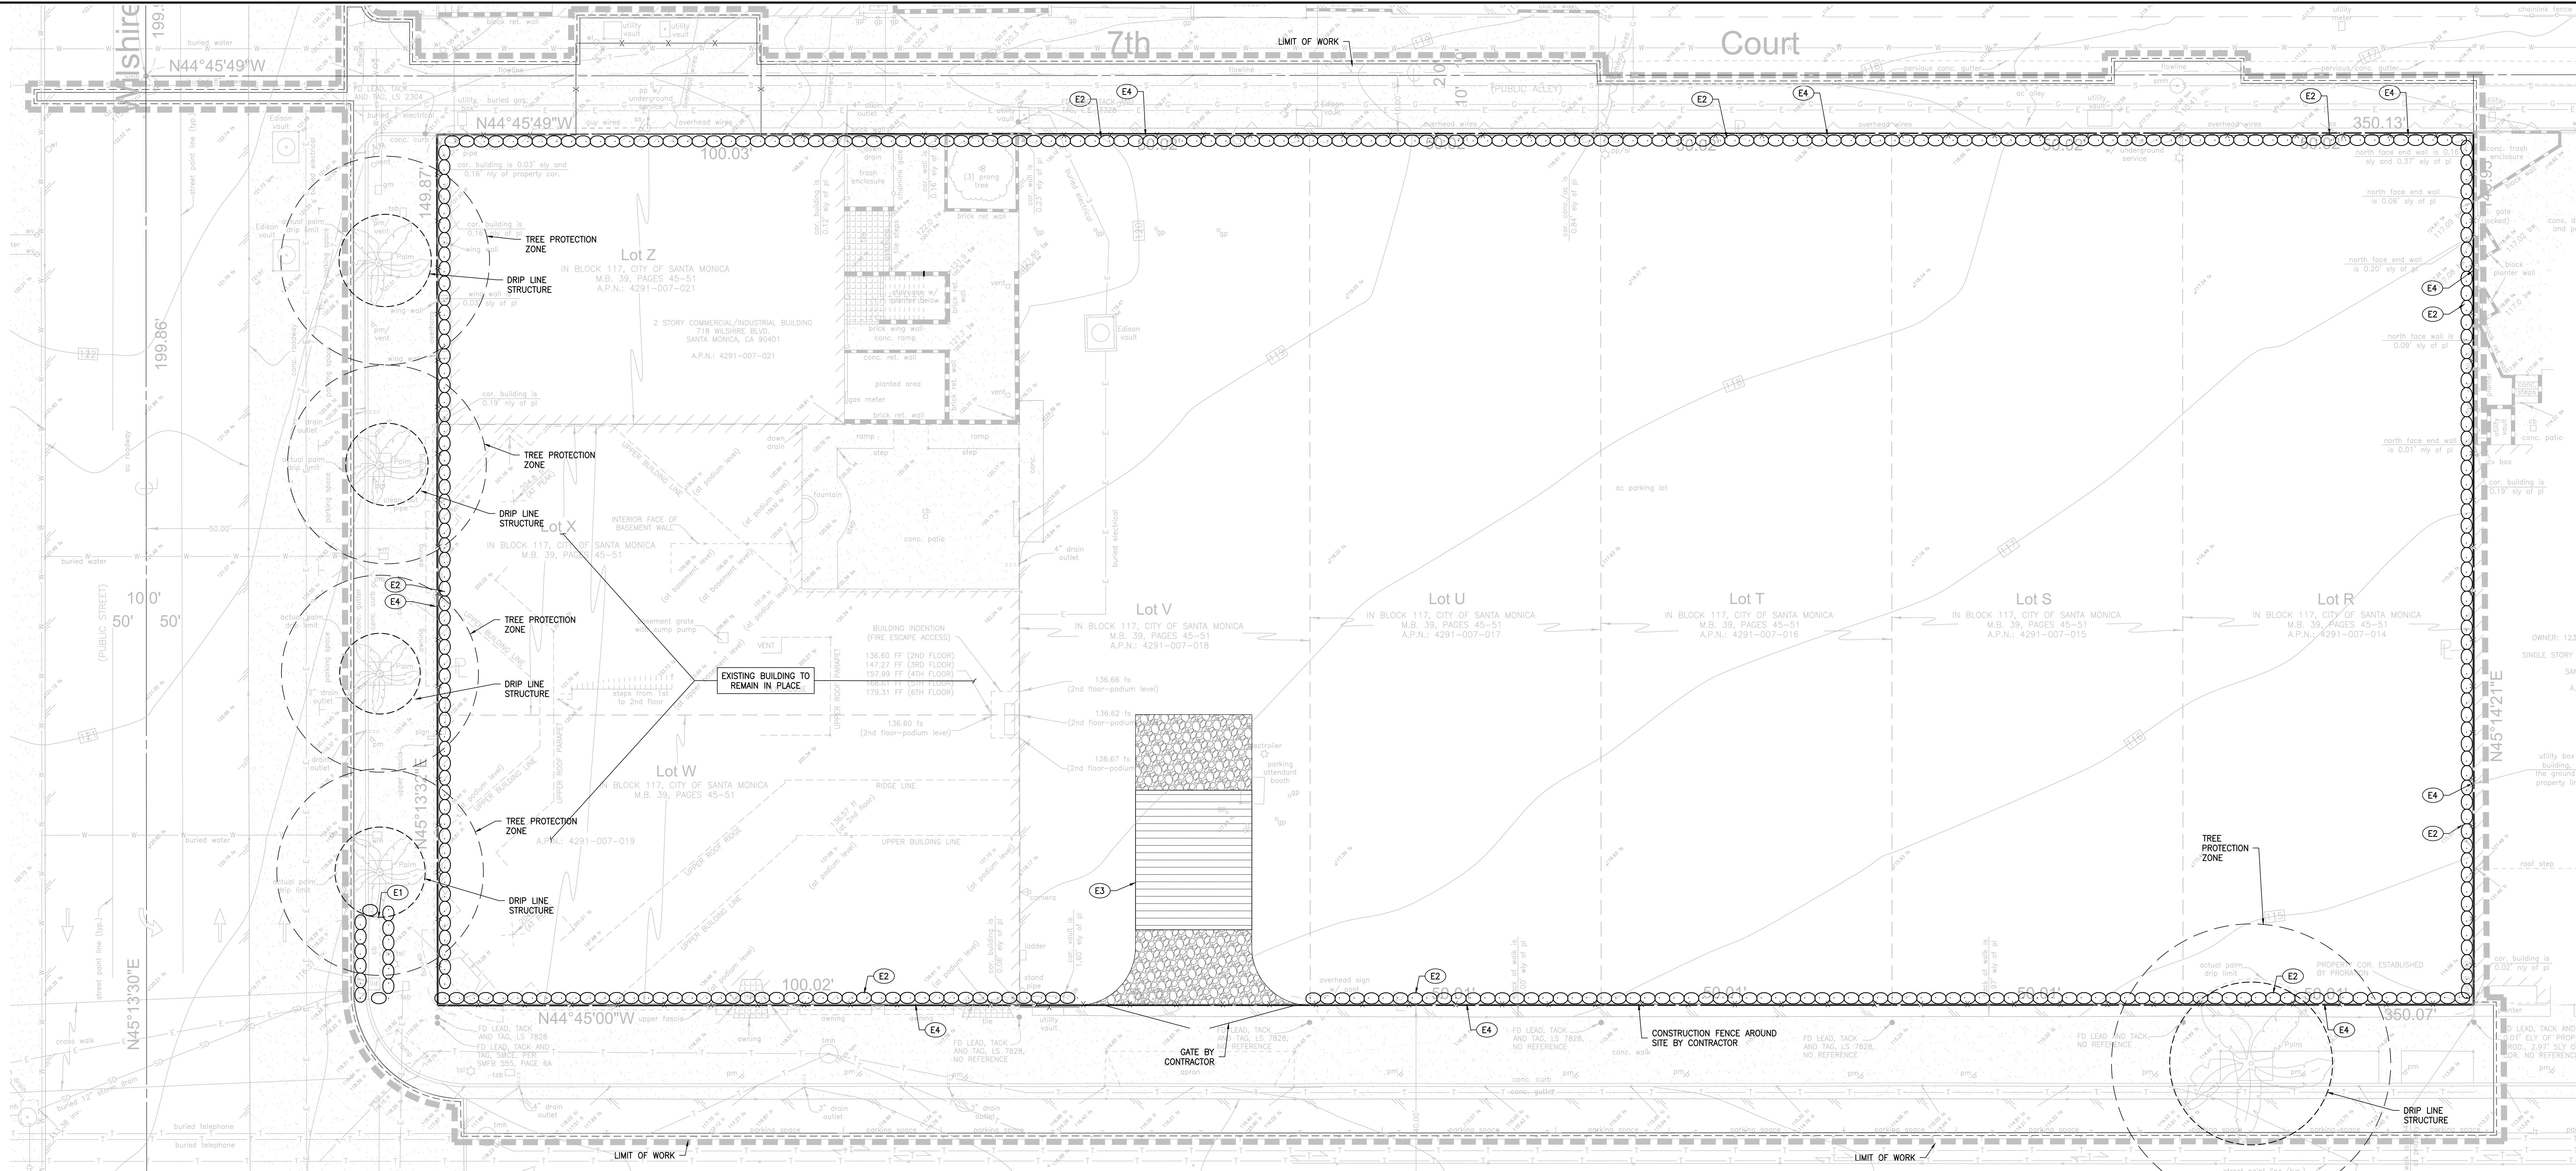

BMP NOTES:

THE FOLLOWING BMPs AS OUTLINED IN, BUT NOT LIMITED TO, THE BEST MANAGEMENT PRACTICE HANDBOOK, CALIFORNIA STORMWATER QUALITY TASK FORCE, SACRAMENTO, CALIFORNIA, NOVEMBER 2009, MAY APPLY DURING THE CONSTRUCTION OF THIS PROJECT (ADDITIONAL MEASURES MAY BE REQUIRED IF DEEMED APPROPRIATE BY CITY INSPECTORS):

EROSION CONTROL

- EC1-SCHEDULING
- EC5-SOIL BINDERS
- EC14-COMPOST BLANKET
- EC15-SOIL PREPARATION/ROUGHENING
- EC16-NON-VEGETATIVE STABILIZATION

TEMPORARY SEDIMENT CONTROL

- SE7-STREET SWEEPING AND VACUUMING
- SE8-SANDBAG BARRIER
- SE10-STORM DRAIN INLET PROTECTION

EQUIPMENT TRACKING CONTROL

- TC1-STABILIZED CONSTRUCTION ENTRANCE/EXIT
- TC2-STABILIZED CONSTRUCTION ROADWAY
- TC3-ENTRANCE/OUTLET TIRE WASH
- WE1-WIND EROSION CONTROL

NON-STORMWATER MANAGEMENT

- NS1-WATER CONSERVATION PRACTICES
- NS2-DEWATERING OPERATIONS
- NS3-PAVING AND GRINDING OPERATIONS
- NS8-VEHICLE AND EQUIPMENT CLEANING
- NS9-VEHICLE AND EQUIPMENT FUELING
- NS10-VEHICLE AND EQUIPMENT MAINTENANCE
- NS11-PILE DRIVING OPERATIONS
- NS12-CONCRETE CURING
- NS13-CONCRETE FINISHING
- NS14-MATERIAL AND EQUIPMENT USE

WASTE MANAGEMENT & MATERIALS POLLUTION CONTROL

- WM1-MATERIAL DELIVERY AND STORAGE
- WM2-MATERIAL USE
- WM3-STOCKPILE MANAGEMENT
- WM4-SPILL PREVENTION AND CONTROL
- WM5-SOLID WASTE MANAGEMENT
- WM6-HAZARDOUS WASTE MANAGEMENT
- WM7-CONTAMINATED SOIL MANAGEMENT
- WM8-CONCRETE WASTE MANAGEMENT
- WM9-SANITARY/SEPTIC WASTE MANAGEMENT
- WM10-LIQUID WASTE MANAGEMENT

EROSION CONTROL NOTES:

- TEMPORARY EROSION CONTROL DEVICES SHOWN ON THE GRADING PLAN WHICH INTERFERE WITH THE WORK SHALL BE RELOCATED OR MODIFIED AS AND WHEN THE INSPECTOR SO DIRECTS AS THE WORK PROGRESSES TO MEET "AS GRADED" CONDITIONS.
- ALL LOOSE SOIL AND DEBRIS SHALL BE REMOVED FROM THE STREET AREAS UPON STARTING OPERATIONS AND PERIODICALLY THEREAFTER AS DIRECTED BY THE INSPECTOR
- WHEN THE INSPECTOR SO DIRECTS, A 12-INCH BERM SHALL BE MAINTAINED ALONG THE TOP OF THE SLOPE OF THOSE FILLS ON WHICH GRADING IS NOT IN PROGRESS.
- STORM AND SEWER DRAIN TRENCHES THAT ARE CUT THROUGH BASIN DIKES OR BASIN INLET DIKES SHALL BE PLUGGED WITH SANDBAGS.
- EXCEPT WHEN THE INSPECTOR DIRECTS OTHERWISE, ALL DEVICES SHOWN SHALL BE IN PLACE AT THE END OF EACH WORKING DAY WHEN RAIN IS FORECAST, AND SHALL BE MAINTAINED DURING THE RAINY SEASON (OCTOBER 15 TO APRIL 15).
- SANDBAGS SHALL BE STOCKPILED ON SITE, READY TO BE PLACED IN POSITION WHEN RAIN IS FORECAST, OR WHEN THE INSPECTOR SO DIRECTS.
- A "STANDBY EMERGENCY CREW" SHALL BE ALERTED BY THE PERMITTEE OR THE CONTRACTOR TO PERFORM EMERGENCY WORK DURING RAINSTORMS. THE PARTY TO BE CONTACTED IS:
NAME: _____ (TO BE FILLED IN BY CONTRACTOR)
PHONE NUMBER: _____

DUST CONTROL NOTES:

- DUST SHALL BE CONTROLLED BY WATERING AND/OR APPLYING A DUST PALLIATIVE. THE DUST PALLIATIVE SHALL BE APPLIED IN THE AMOUNT AT THE LOCATIONS AS DIRECTED BY THE ENGINEER
- WATER FOR DUST CONTROL SHALL BE APPLIED BY MEANS OF PRESSURE TYPE DISTRIBUTORS OR PIPE LINES EQUIPPED WITH A SPAY SYSTEM OR HOSES WITH NOZZLES THAT WILL INSURE A UNIFORM APPLICATION OF WATER.
- UNLESS WATER IS APPLIED BY MEANS OF PIPE LINES, AT LEAST ONE MOBILE UNIT WITH A MINIMUM CAPACITY OF 100 GALLONS SHALL BE AVAILABLE FOR APPLYING WATER.
- ALL SOIL MATERIALS OR DEBRIS TRUCKED FROM THE SITE SHALL BE COVERED AND SPRINKLED PRIOR TO ENTERING PUBLIC STREETS.
- PROVIDE FOR WET SUPPRESSION OR CHEMICAL STABILIZING OF EXPOSED SOILS.
- PROVIDE FOR RAPID CLEAN-UP OF SEDIMENTS DEPOSITED ON THE PAVED ROADS.
- LIMIT THE AMOUNT OF AREAS DISTURBED BY CLEARING & EARTH MOVING OPERATIONS BY SCHEDULING THESE ACTIVITIES IN PHASES.

EROSION CONTROL NOTES:

- (E1) PROVIDE CURB INLET PROTECTION PER DETAIL 1, SHEET C-500.
- (E2) PLACE SANDBAGS TRIPLE ROW PER DETAIL 2, SHEET C-500.
- (E3) STABILIZED CONSTRUCTION ENTRANCE PER DETAIL 3, SHEET C-500.
- (E4) PLACE TEMPORARY CONSTRUCTION FENCE.

LEGEND

- LIMIT LINE OF EROSION CONTROL
- SANDBAGS

