
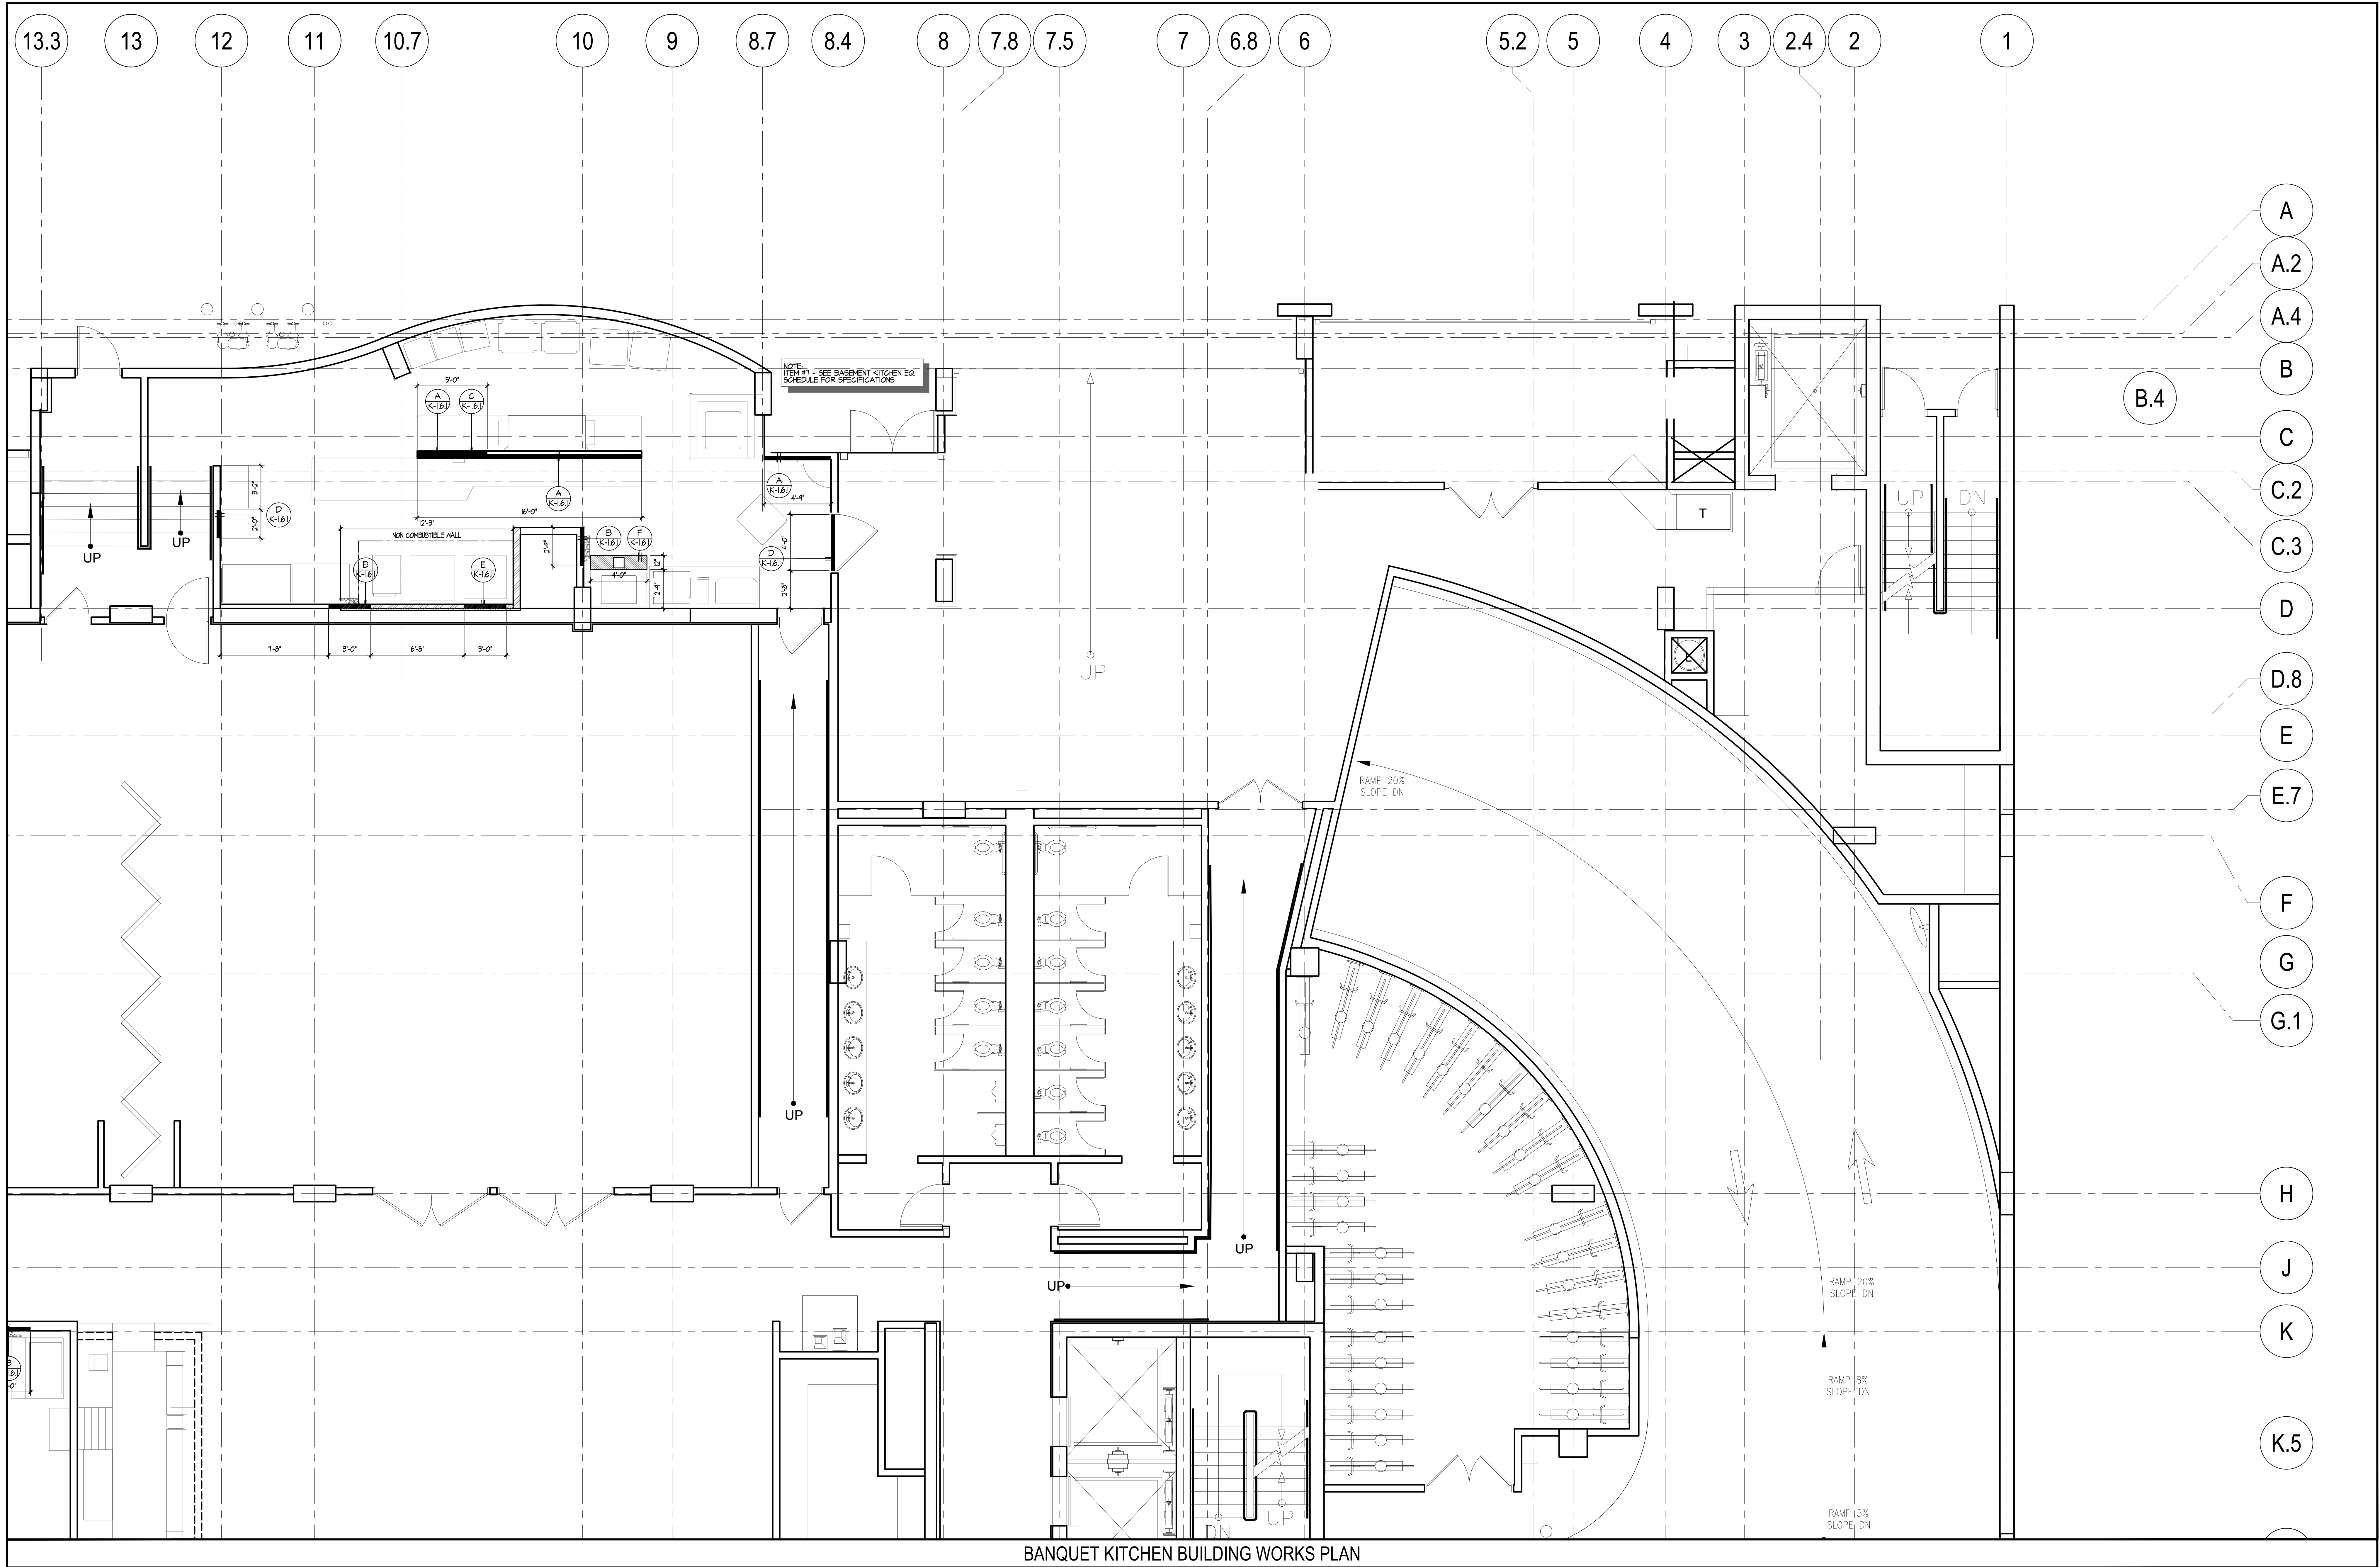
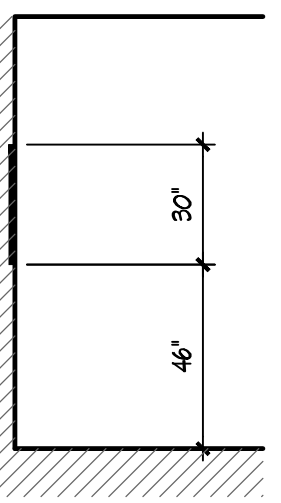
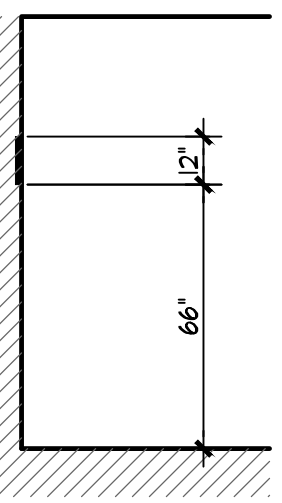
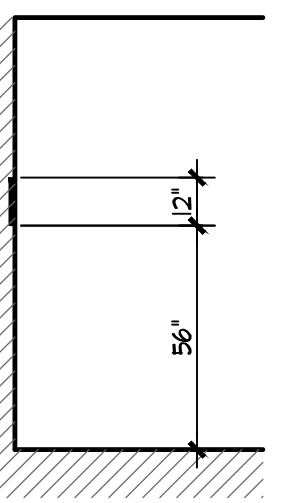
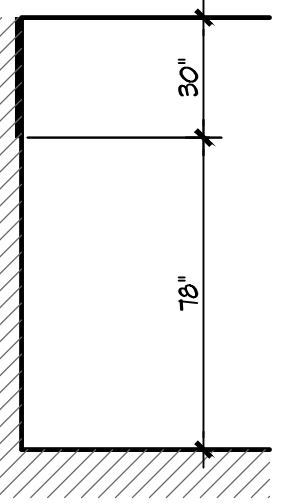


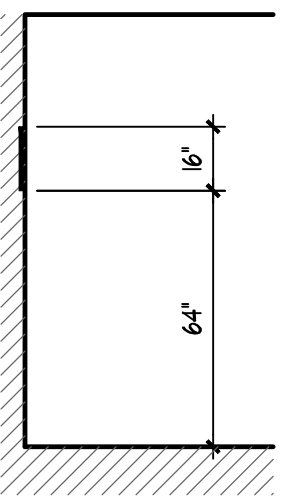


BANQUET KITCHEN BUILDING WORKS PLAN

	
WALLSHELF / MOP RACK	A
	
PRE-RINSE	C
	
CHEESEMELTER	E

NOTES:

- 1) ALL WALLBACKING TO BE 16 GAUGE GALVANIZED, SECURELY ATTACHED TO STUD/WALL FRAMING.
- 2) WALLBACKING LENGTHS SHOWN ON BUILDING WORK REQUIREMENTS ARE MINIMUM. ALWAYS EXTEND WALLBACKING TO NEXT STUD OVER IN EACH DIRECTION.
- 3) ALL WORK SHOWN TO BE BY GENERAL CONTRACTOR UNLESS OTHERWISE NOTED.
- 4) VERTICAL STUDS AT BACKING PLATE TO BE ATTACHED TO CONT. TOP/ BOTTOM CONT. TRUCK TO BASE WITH 3/8" EXPANSION ANCHOR. ANCHOR WITH 2" EMBED. @ 12" O.C.

WALLBACKING CONNECTION TO STEEL

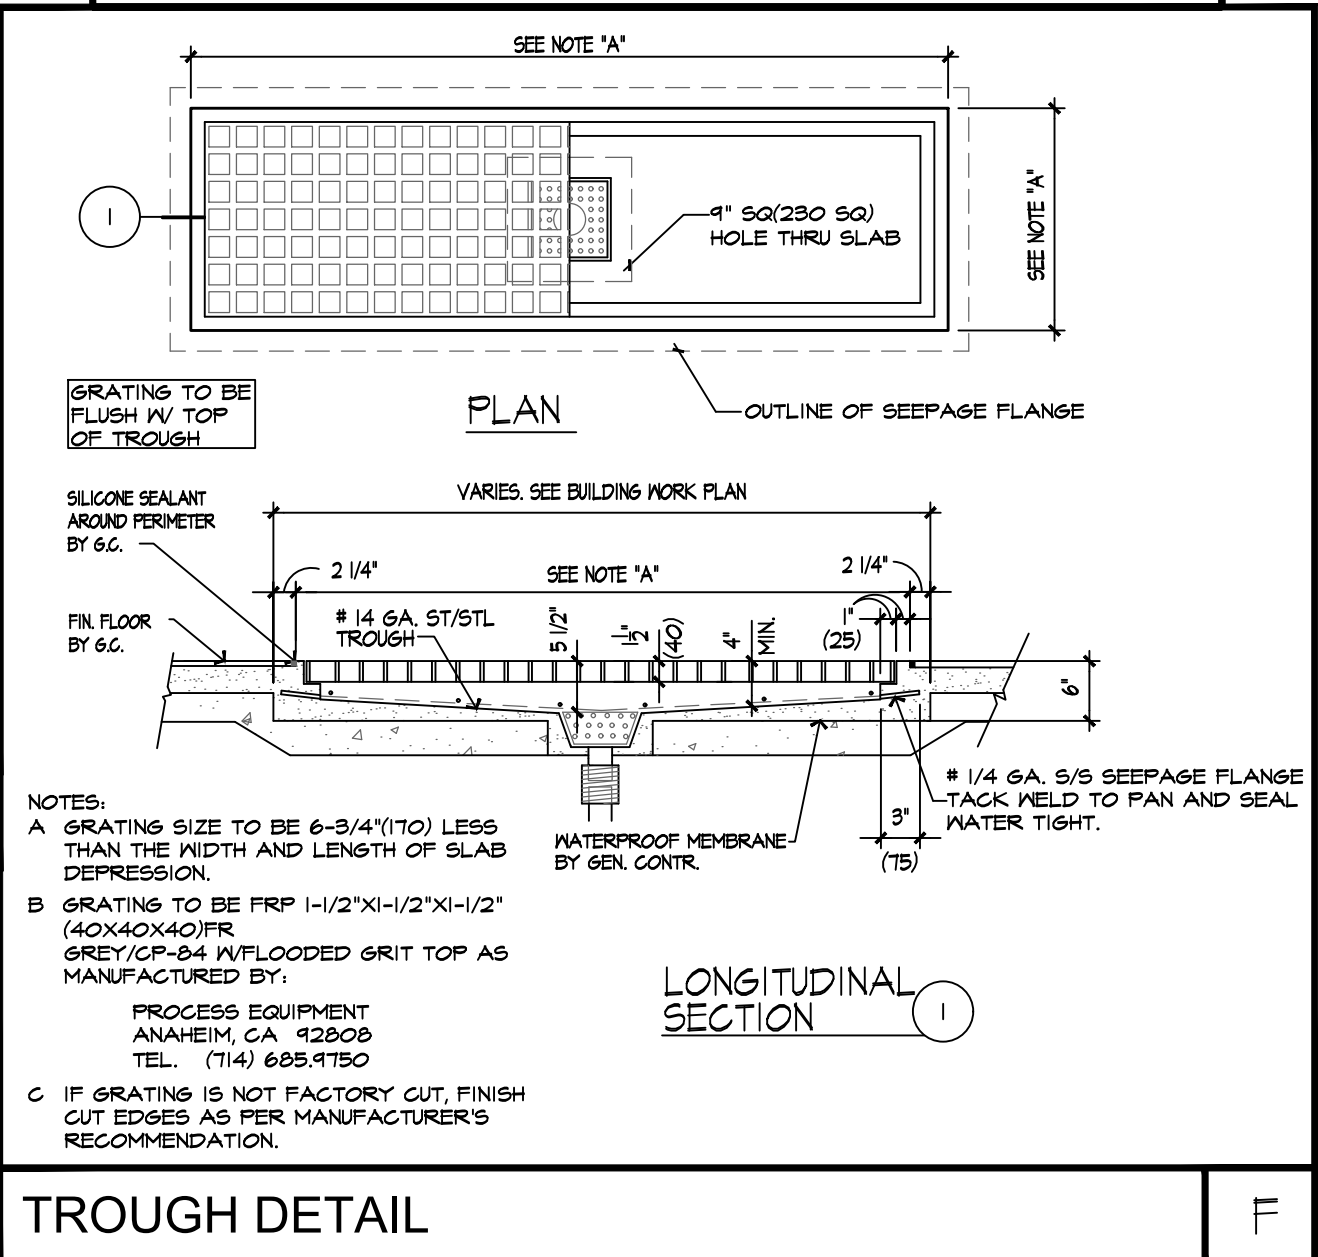

DESIGNED BY	DATE	DESCRIPTION
06/07/2013	06/07/2013	Medium 02
08/04/2013	08/04/2013	Medium 03
10/20/2013	10/20/2013	Medium 04
05/27/2016	05/27/2016	Medium 05



howard laks architects
1545 Health Street
Santa Monica, CA 90401
voice : 310-393-4465
fax : 310-393-2220

CONSULTANTS

Kitchen Professionals
16742 Colwood Street, Suite 103
Huntington Beach, CA 92647
Phone: 714.841.0531 Fax: 714.441.9986

710 WILSHIRE BOULEVARD
MIXED-USE HOTEL PROJECT
SANTA MONICA - CALIFORNIA 90401
BANQUET KITCHEN BUILDING WORKS PLAN

DRAWN	JL
CHECKED	CH
APPROVED	-
SCALE	1/4" = 1'-0"
SHEET	K-1.6.1
DATE	June 25, 2013
PROJECT NUMBER	H.A. 0000000-00000