


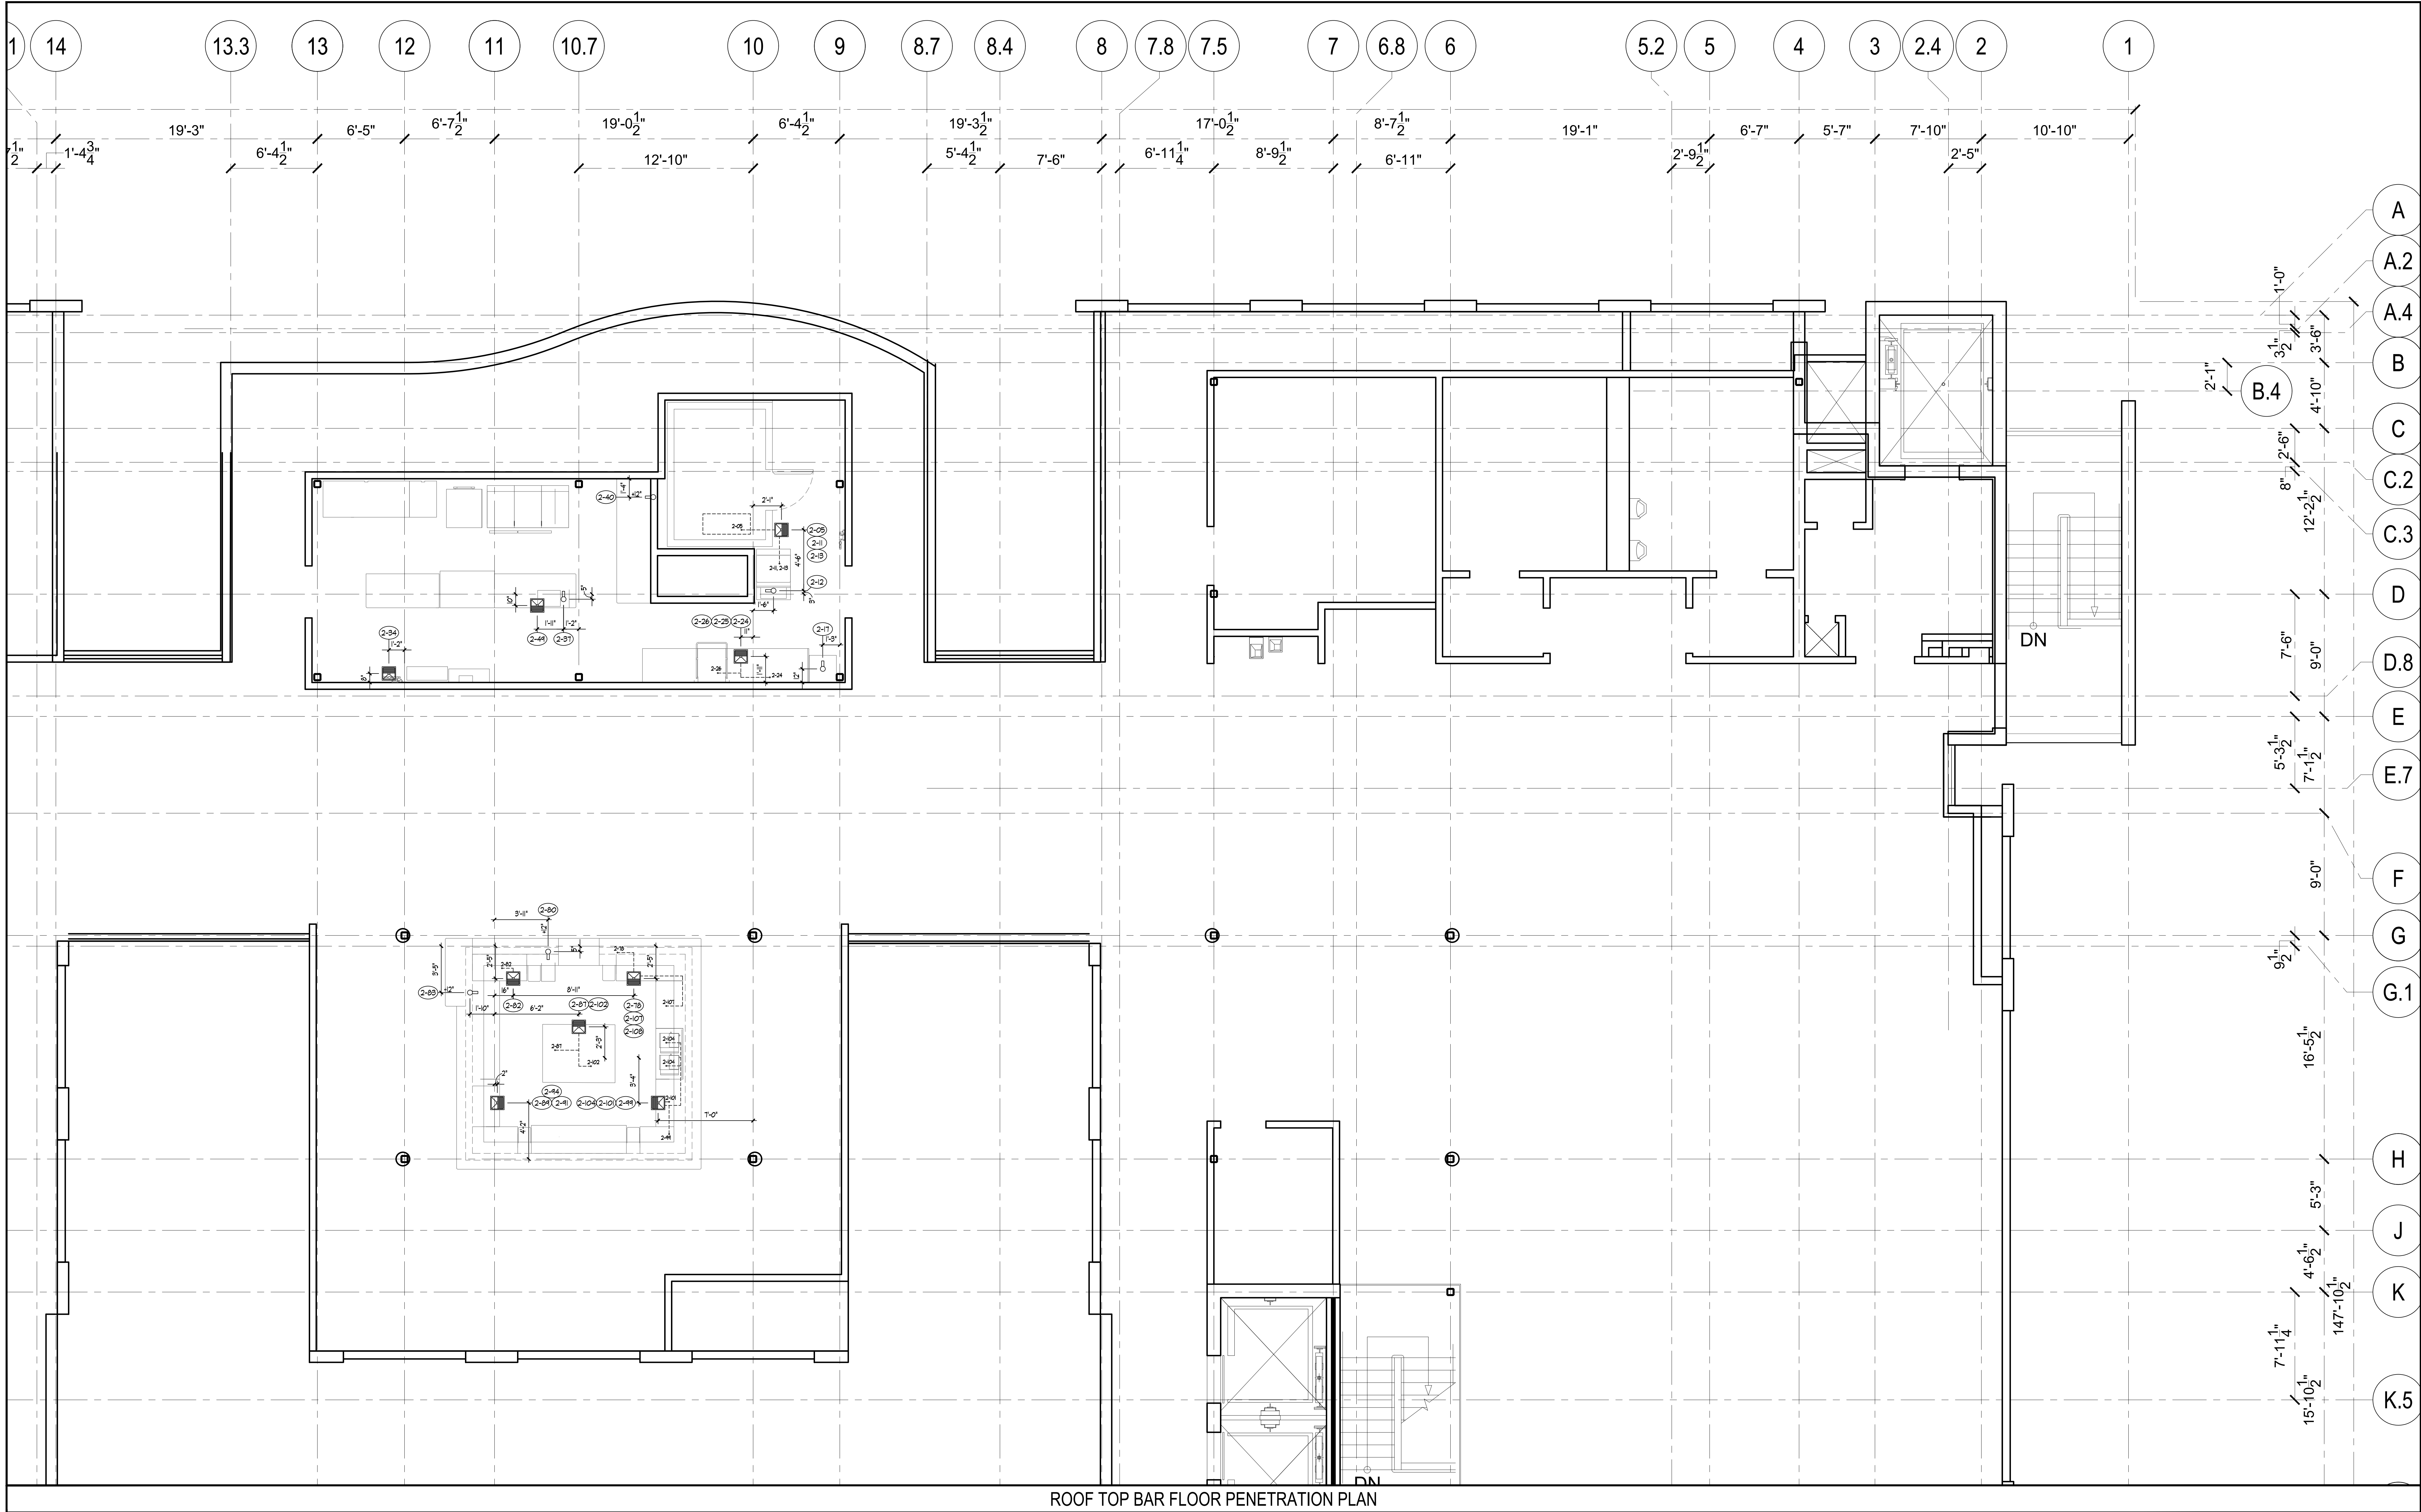

PLUMBING NOTES

1. PLUMBING CONTRACTOR TO VERIFY ALL INCOMING SERVICES AND MAKE ALL EXTERNAL AND INTERNAL CONNECTIONS AND PROVIDE ALL FITTINGS, PARTS, ETC., NECESSARY TO MAKE EQUIPMENT FUNCTIONAL.
2. PLUMBING CONTRACTOR TO PROVIDE AND INSTALL INDIVIDUAL SHUT-OFF VALVES ON ALL WATER AND GAS LINES.
3. ALL FLOOR AND WALL PENETRATIONS MUST BE SEALED WATER-TIGHT AND VAPOR PROOF.
4. ALL PLUMBING OUTLETS AND CONNECTIONS SHOWN ON PLAN ARE FOR EQUIPMENT SHOWN ON FOOD SERVICE EQUIPMENT PLAN ONLY. SEE ARCHITECTURAL PLANS FOR FURTHER PLUMBING REQUIREMENTS.
5. ALL HORIZONTAL DIMENSIONS SHOWN ARE FROM FINISHED FACE OF WALL TO CENTRAL LINE OF STUB OUT OR FROM CENTRAL LINE OF STUB OUT TO CENTRAL LINE OF STUB OUT. ALL VERTICAL DIMENSIONS ARE TO FINISH FLOOR OR FINISHED CEILING UNLESS OTHERWISE NOTED ON PLANS. VERIFY ALL DIMENSIONS AT JOB SITE.
6. ALL SYMBOLS NOTED 1'-0", 1'-6", ETC., ARE TO STUB OUT OF WALL AT HEIGHT INDICATED. HEIGHT IS GIVEN FROM FINISHED FLOOR TO FINISHED CEILING CENTRAL LINE OF STUB OUT. ALL SYMBOLS NOTED STUB UP ARE TO STUB UP ABOVE FINISHED FLOOR OR FINISHED CEILING AT LOCATION INDICATED ON PLAN. VERIFY ALL DIMENSIONS AT JOB SITE.
7. ALL FLOOR SINKS SHOWN ARE TO BE SET FLUSH WITH FINISHED FLOOR. FLOOR SINKS INDICATED HALF IN AND HALF OUT OF CURB TO BE FLUSH WITH FINISHED FLOOR. FLOOR SINKS WITH FINISHED CURB TO BE SET FLUSH WITH FINISHED FLOOR. VERIFY LOCATION OF FLOOR SINKS PRIOR TO FINAL POUR. VERIFY WITH R.E.G.
8. PLUMBING CONTRACTOR TO PROVIDE AND INSTALL REMOVABLE GRILLS OR COVERS FOR ALL FULL OR PARTIALLY EXPOSED FLOOR SINKS.
9. PLUMBING CONTRACTOR TO PROVIDE AND INSTALL TYPE "L" COVERS USING DRAIN LINES FROM ALL APPLICABLE EQUIPMENT TO FLOOR SINKS, INCLUDING WALK-IN COOLER AND FREEZER (GOLD) AND TO ISOLATE ALL DRAIN LINES FROM ICE BINS, REFRIGERATION EQUIPMENT, ETC.. PLUMBING CONTRACTOR TO INSTALL DRAIN LINES SO THEY DO NOT AFFECT UNDER-COUNTER STORAGE AND OTHER OPERATIONAL FUNCTIONS OF EQUIPMENT.
10. FLOOR SINK FOR DISHWASHER TO HAVE A MINIMUM 3" DRAIN PIPE.
11. PLUMBING CONTRACTOR TO VERIFY ALL INCOMING WATER TEMPERATURES, GPM'S AND DISHWASHER SPECIFICATIONS.
12. IF INLET PRESSURE ON HOT WATER LINE IS IN EXCESS OF 25 LBS. FLOW PRESSURE PLUMBING CONTRACTOR TO PROVIDE AND INSTALL PRESSURE REGULATING VALVE. 8 GPM RISE CONSUMPTION AT 25 LBS. FLOW PRESSURE REQUIRED FOR DISHWASHER MACHINE.
13. PLUMBING CONTRACTOR TO INSTALL FOOD SERVICE EQUIPMENT CONTRACTOR TO PROVIDE AUTOMATIC SHUT-OFF VALVES ON GAS LINE FOR FIRE SYSTEM IN HOOD.
14. PLUMBING CONTRACTOR TO PROVIDE AND INSTALL NECESSARY FACILITIES FOR MAKE-UP AIR FANS. VERIFY LOCATIONS AND REQUIREMENTS WITH H.V.A.C. CONTRACTOR.
15. PLUMBING CONTRACTOR TO PROVIDE AND INSTALL STRAINERS OR APPROVED TYPE FILTERS ON GAS SUPPLY LINES.
16. HOT WATER TANK TO BE PROVIDED AND SIZED FOR ADEQUATE WATER CONSUMPTION TO MEET HEALTH DEPARTMENT REQUIREMENTS BY PLUMBING CONTRACTOR. (VERIFY LOCATION).
17. PLUMBING CONTRACTOR TO INSTALL FOOD SERVICE EQUIPMENT CONTRACTOR TO PROVIDE ALL GAS PRESSURE REGULATING VALVES.
18. PLUMBING CONTRACTOR TO PROVIDE AND INSTALL BACKFLOW PREVENTION DEVICES FOR FEATURES REQUIRED BY LOCAL PLUMBING AND BUILDING DEPARTMENTS.
19. THIS PLAN IS FOR PLUMBING REGS. FOR SPECIFIC FOODSERVICE AREAS ONLY. PLUMBING CONTRACTOR TO REFER TO ARCHT. DRAWINGS FOR ADDITIONAL PLUMBING REGS. NOT SHOWN.
20. ALL HOT WATER # FAUCET TO BE 120" MINIMUM.

PLUMBING SYMBOLS

- DIRECT WASTE
- ⊗ FLOOR SINK
- ⊗ FLOOR SINK W/ HALF GRATE
- FLOOR DRAIN
- ITEM NUMBER